

KID CITY ACADEMY

FRANKLIN, JOHNSON COUNTY, INDIANA

CONSTRUCTION PLANS

HOLEY MOLEY SAYS,
"DON'T
DIG
BLIND"



1-800-382-5544
CALL TOLL FREE
1-800-428-5200
FOR CALLS OUTSIDE OF INDIANA

PROPOSED SITE

84 LUMBER SITE TOTAL ACREAGE: 2.876
SITE ZONING = IBD
ADJACENT ZONING
NORTH = IBD SOUTH = IL
EAST = IC WEST = IBD



STATEMENT of USE

KID CITY ACADEMY IS A PROPOSAL FOR A DAYCARE CENTER INCLUDING A BUILDING AND PARKING LOT.

PROPOSED STARTING & COMPLETION of CONSTRUCTION


ESTIMATED START DATE: 9/2014
ESTIMATED COMPLETION DATE: 9/2015

PROPOSED SITE 1950 NORTH GRAHAM ROAD

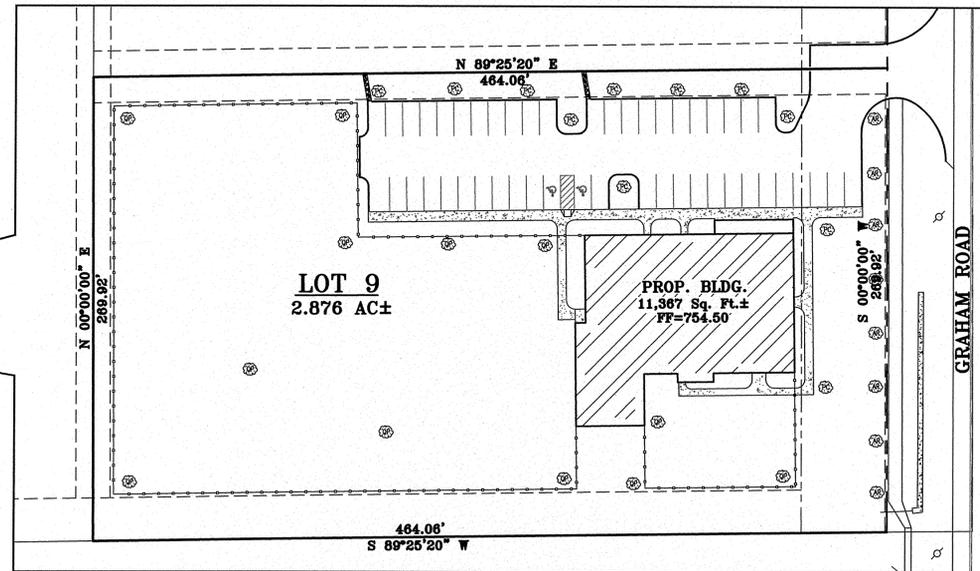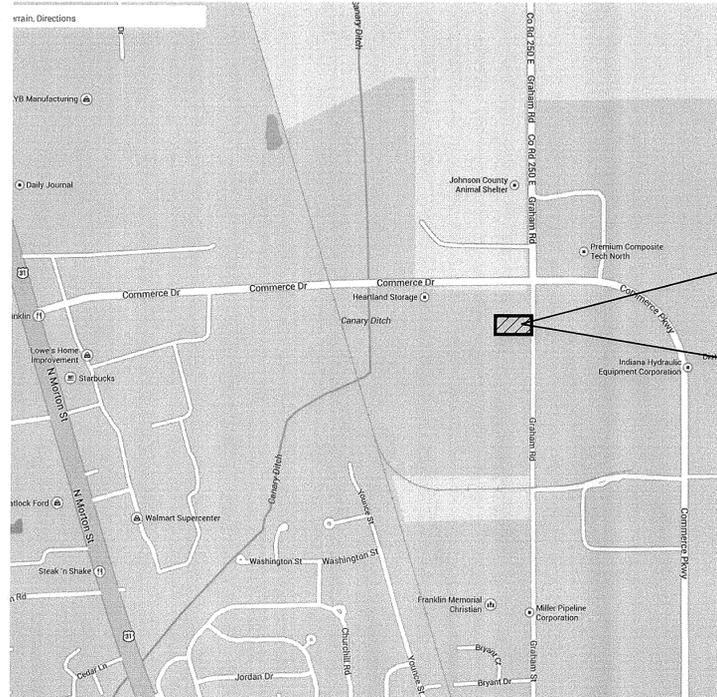

OWNER & DEVELOPER
FIVEKIDS PROPERTIES, LLC
96 LEANING TREE ROAD
GREENWOOD, IN 46142
Contact: Mitch Salyers
Phone: 317-319-1963
Email: salyers5725@gmail.com

VICINITY MAP

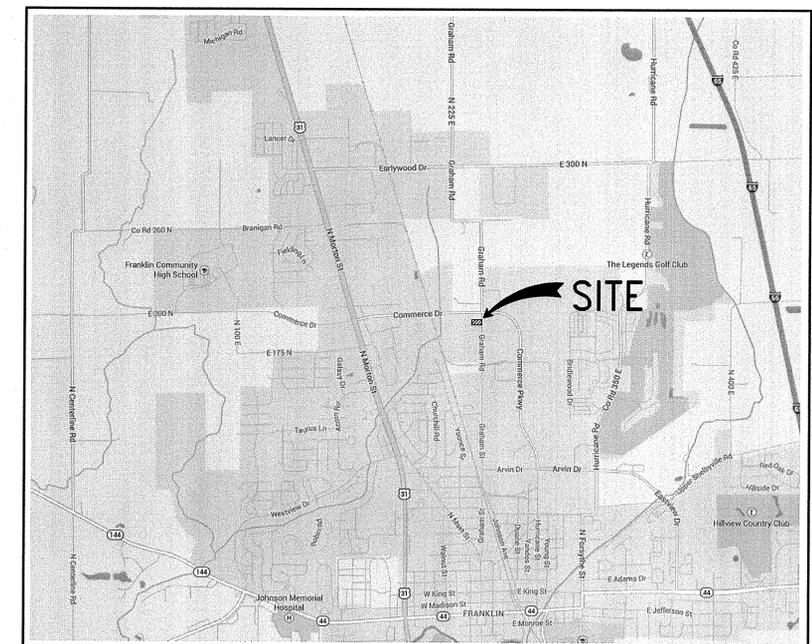

INDEX OF DRAWINGS

SHEET NO.	SHEET TITLE
1	TITLE SHEET
2	EXISTING CONDITIONS
3	GRADING PLAN
4	DIMENSIONAL, UTILITY, & LANDSCAPING PLAN
5-6	EROSION CONTROL
7	GENERAL DETAILS & SPECIFICATIONS

THE DEVELOPER/OWNER IS ULTIMATELY RESPONSIBLE TO ENSURE THAT THE PROJECT IS IN COMPLIANCE WITH ALL PLAN COMMISSION AND/OR BOARD OF ZONING APPEALS CONDITIONS.
THE DEVELOPER/OWNER IS ULTIMATELY RESPONSIBLE TO ENSURE THAT THE PROJECT IS BUILT TO ALL CITY OF FRANKLIN STANDARDS AND SPECIFICATIONS.
THE PROJECT ENGINEER/SURVEYOR IS RESPONSIBLE IN ENSURING THAT THE SITE DEVELOPMENT PLANS ARE DESIGNED TO ALL CITY OF FRANKLIN STANDARDS AND SPECIFICATIONS.

LEGAL DESCRIPTION

A part of the Northwest Quarter of Section 11, Township 12 North, Range 4 East of the Second Principal Meridian, Johnson County, Indiana, being more particularly described as follows:


Lot 9 RSW INDUSTRIAL PARK SECTION AND REPLAT OF LOT NO. 2 SECTION ONE as recorded in Instrument Number 2014-002127, in the Office of the Johnson County Recorder, containing 2.876 acres, more or less.

Subject to all Rights-of-Way, Easements, and Restrictions.

REVISIONS

SHEET NO.	DATE	REVISION(S)

ISSUED FOR REVIEW AND COMMENT JUNE 11, 2014
ISSUED FOR CONSTRUCTION _____



PREPARED BY:

MAURER SURVEYING, INC.

4800 W. Smith Valley Road, Ste. P, Greenwood, Indiana 46142
Office - 317-881-3898 Fax - 317-881-4099
www.MaurerSurveying.com


LAND SURVEYING, LAND DEVELOPMENT & BUILDER'S SERVICES

CERTIFIED BY:



Paul Maurer 6/11/14
Paul Maurer, P.L.S. #880006
paul@maurersurveying.com

NOTICE, PERMITS, and NOTES


1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING OR VERIFYING THAT ALL PERMITS AND APPROVALS ARE OBTAINED FROM THE RESPECTIVE CITY, COUNTY AND STATE AGENCIES PRIOR TO STARTING CONSTRUCTION.
2. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE EXACT LOCATION OF ALL EXISTING UTILITIES IN THE VICINITY OF THE CONSTRUCTION AREA PRIOR TO STARTING ANY CONSTRUCTION.
3. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY FOR NOTIFICATION AND COORDINATION OF ALL CONSTRUCTION WITH THE RESPECTIVE UTILITY COMPANIES, PRIOR TO STARTING ANY CONSTRUCTION.
4. ALL CONSTRUCTION ACTIVITY ON THIS SITE SHALL BE PERFORMED IN COMPLIANCE WITH APPLICABLE O.S.H.A. STANDARDS FOR WORKER SAFETY.
5. ALL CONTRACTORS SHALL BE RESPONSIBLE FOR OBTAINING THE MOST UPDATED SET OF CONSTRUCTION PLANS PRIOR TO COMMENCING CONSTRUCTION. ALL CONTRACTORS SHALL BE RESPONSIBLE FOR PROVIDING AS-BUILT INFORMATION TO THE ENGINEERING/SURVEYING COMPANY UPON COMPLETION OF CONSTRUCTION.

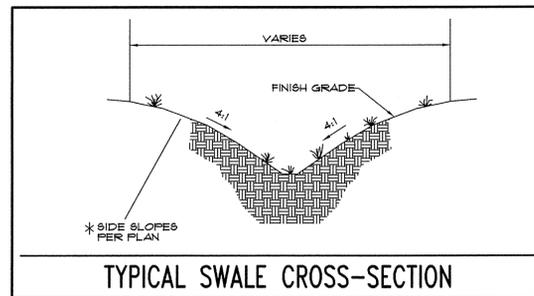

FLOOD HAZARD STATEMENT:
 The accuracy of any flood hazard data shown on this report is subject to map scale uncertainty and to any other uncertainty in location or elevation on the referenced flood insurance rate map. The surveyed parcel lies within Zone "X" as said land plots by scale on Community Panel 18097C0226 E of the Flood Insurance Rate Maps for Marion County, Indiana dated January 5, 2001.

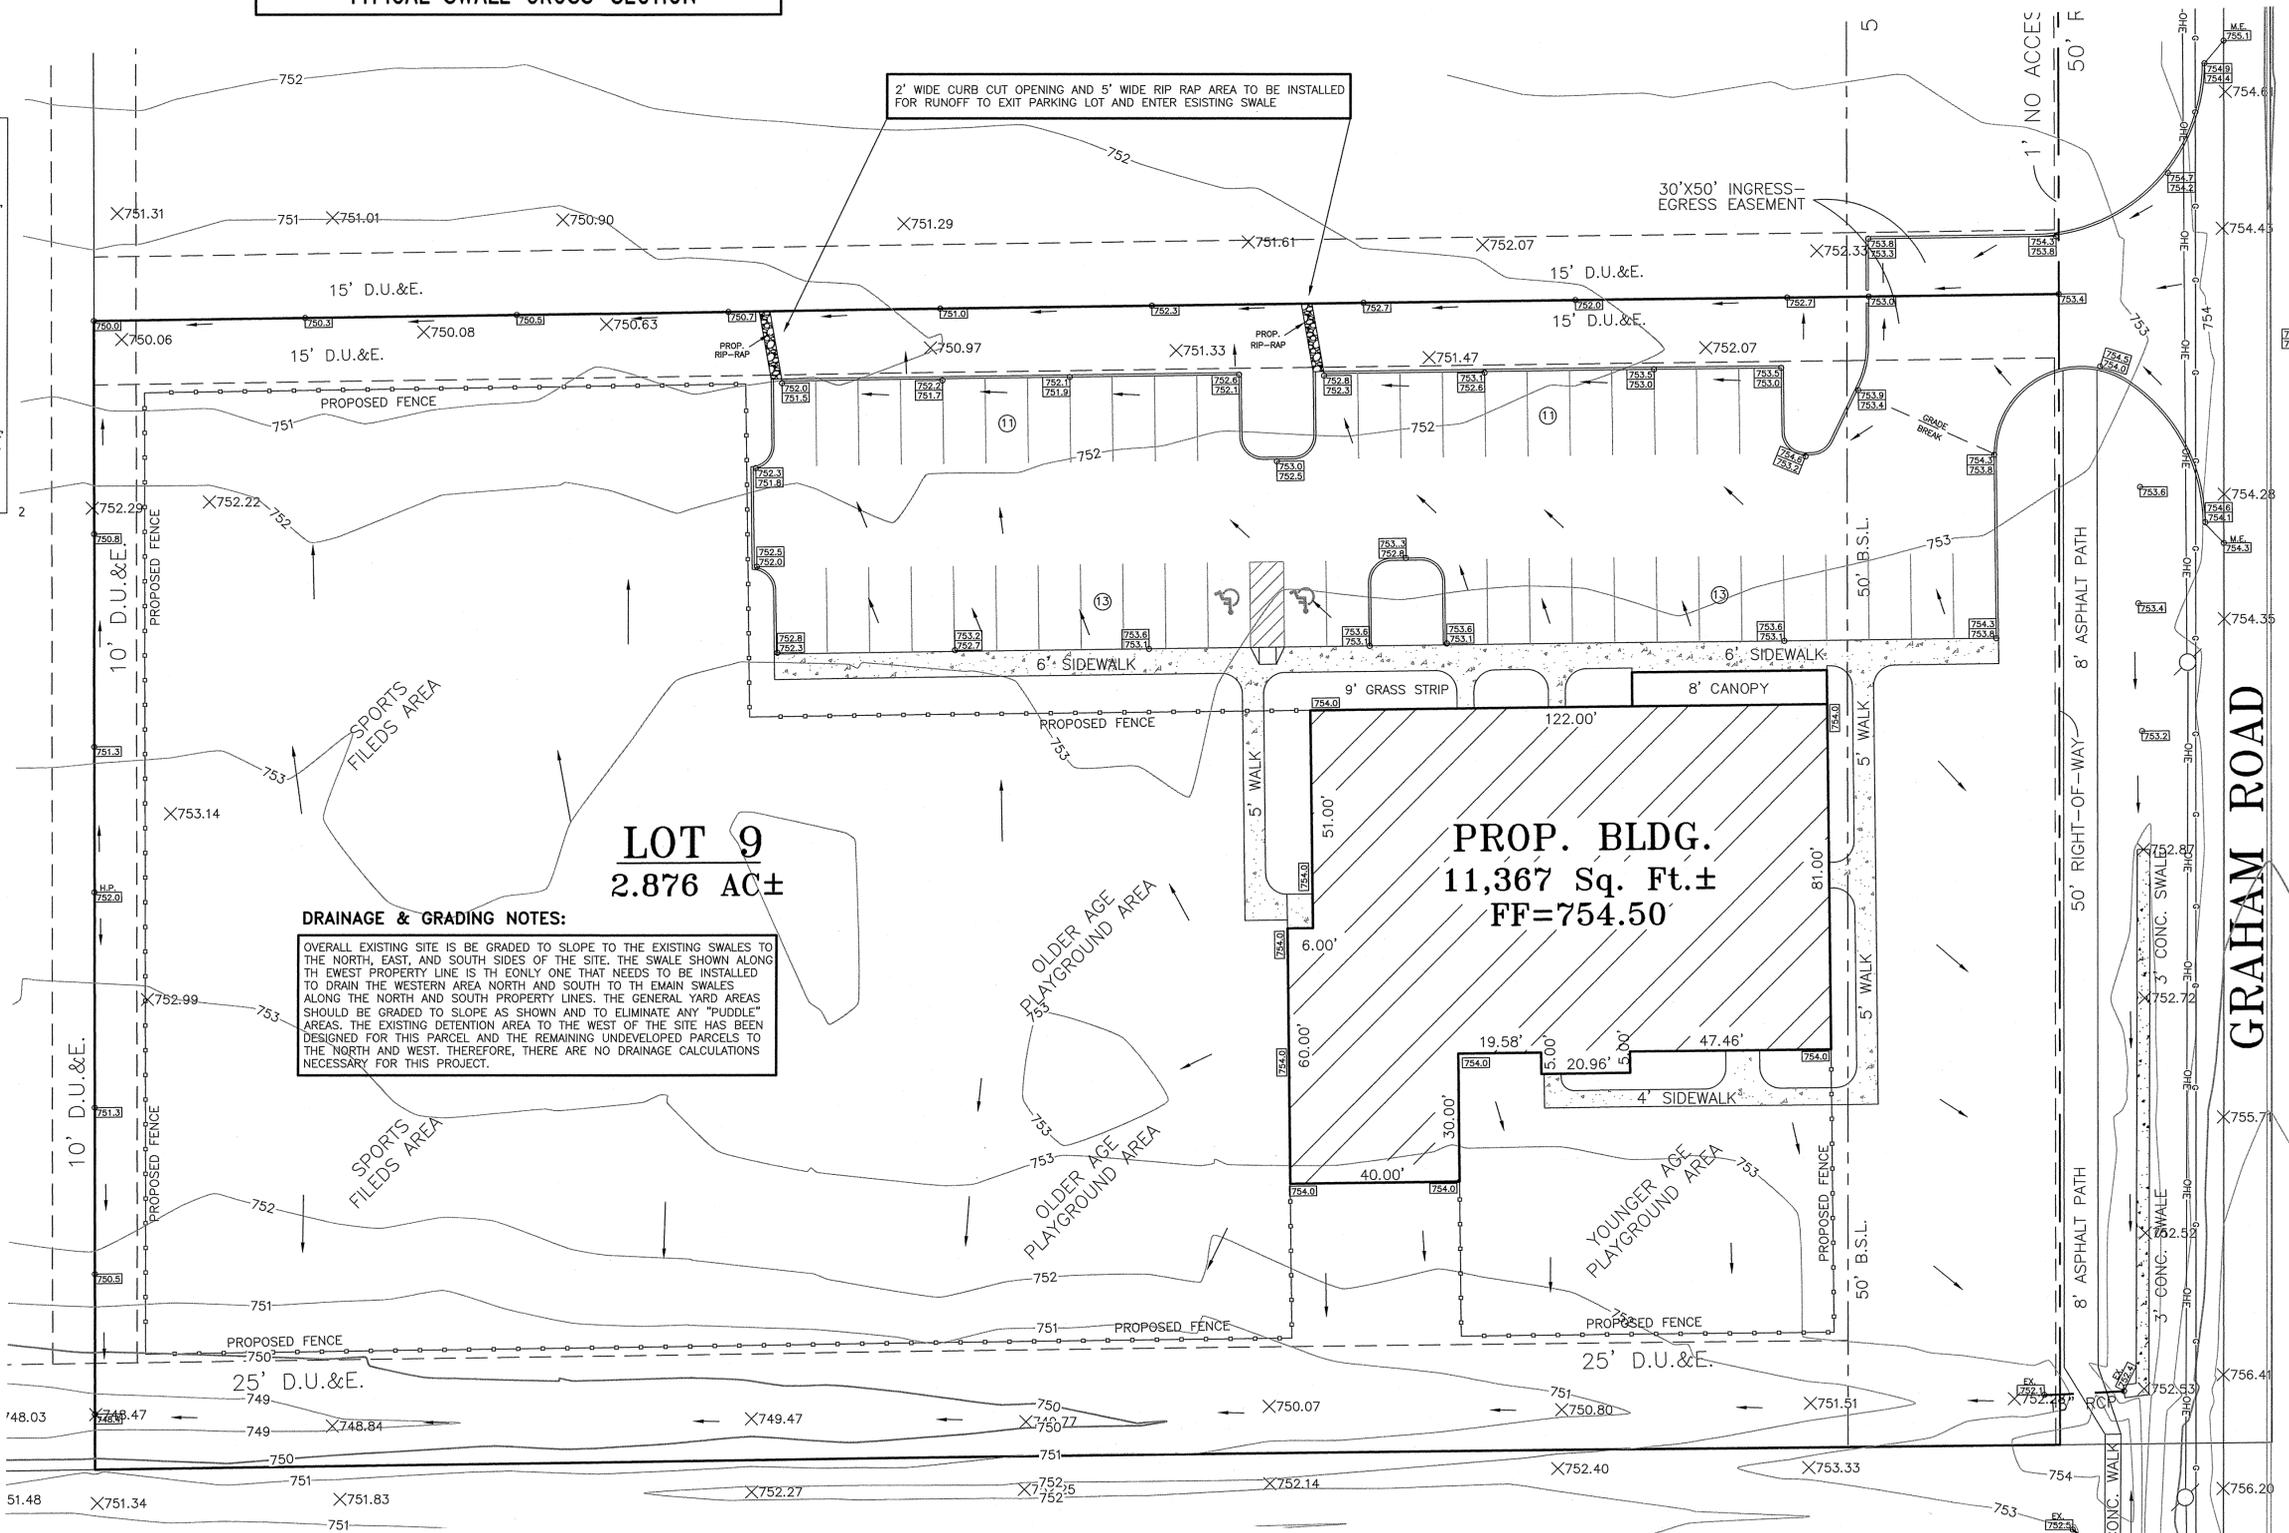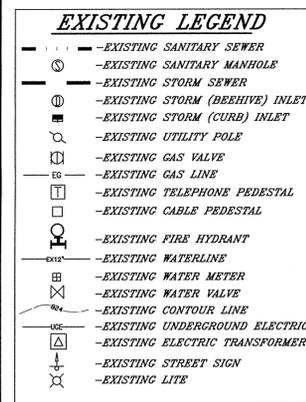

DRAINAGE & GRADING NOTES:
 OVERALL EXISTING SITE IS BE GRADED TO SLOPE TO THE EXISTING SWALES TO THE NORTH, EAST, AND SOUTH SIDES OF THE SITE. THE SWALE SHOWN ALONG THE WEST PROPERTY LINE IS THE ONLY ONE THAT NEEDS TO BE INSTALLED TO DRAIN THE WESTERN AREA NORTH AND SOUTH TO THE EXISTING SWALES ALONG THE NORTH AND SOUTH PROPERTY LINES. THE GENERAL YARD AREAS SHOULD BE GRADED TO SLOPE AS SHOWN AND TO ELIMINATE ANY "PUDDLE" AREAS. THE EXISTING DETENTION AREA TO THE WEST OF THE SITE HAS BEEN DESIGNED FOR THIS PARCEL AND THE REMAINING UNDEVELOPED PARCELS TO THE NORTH AND WEST. THEREFORE, THERE ARE NO DRAINAGE CALCULATIONS NECESSARY FOR THIS PROJECT.

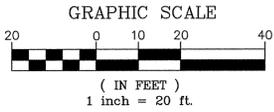

UTILITY STATEMENT:
 THE EXISTING UNDERGROUND UTILITIES SHOWN HAVE BEEN LOCATED FROM VISIBLE FIELD EVIDENCE AND/OR EXISTING DRAWINGS. MAURER SURVEYING, INC. (M) MAKES NO GUARANTEES THAT THE UTILITY INFORMATION SHOWN COMPRISES ALL SUCH UTILITIES IN THE AREA, IN SERVICE OR ABANDONED. MAURER SURVEYING, INC. FURTHER STATES THAT THE UNDERGROUND UTILITY DATA SHOWN DOES NOT INDICATE PRECISE LOCATIONS.

THIS DRAWING/COMPUTER FILE IS THE PROPERTY OF MAURER SURVEYING, INC. (M). ANY REPRODUCTION OR REUSE OF THIS DOCUMENT FOR ANY PURPOSE OTHER THAN THE PROJECT FOR WHICH IT WAS ORIGINALLY INTENDED, WITH OR WITHOUT PERMISSION FROM (M), BY ITS USE AGREES TO INDEMNIFY AND HOLD HARMLESS (M) FROM ANY LOSS, INCLUDING BUT NOT LIMITED TO ATTORNEY FEES, OCCURRING FROM THEIR USE.

ISSUED FOR REVIEW & COMMENTS
 ISSUED FOR CONSTRUCTION

DATE: _____
 REVISION: _____

PROJECT NO. 880006
 SHEET NO. _____

PROJECT NAME:
KID CITY ACADEMY
 1950 NORTH GRAHAM ROAD, FRANKLIN

SHEET NAME:
GRADING PLAN

MAURER SURVEYING, INC.
 4800 WEST SMITH VALLEY ROAD, STE. P, GREENWOOD, IN 46142
 OFFICE - 317-881-8898 FAX 317-881-4089
 LAND SURVEYING, LAND DEVELOPMENT & BUILDER'S SERVICES

PREPARED FOR:
FIVEKIDS PROPERTIES
 96 LEANING TREE ROAD
 GREENWOOD, IN 46142

SHEET
C.3

DATE
 JUNE 11, 2014

JOB NO.
 1750-C.3


NOTICE, PERMITS, and NOTES

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING OR VERIFYING THAT ALL PERMITS AND APPROVALS ARE OBTAINED FROM THE RESPECTIVE CITY, COUNTY AND STATE AGENCIES PRIOR TO STARTING CONSTRUCTION.
2. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE EXACT LOCATION OF ALL EXISTING UTILITIES IN THE VICINITY OF THE CONSTRUCTION AREA PRIOR TO STARTING ANY CONSTRUCTION.
3. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY FOR NOTIFICATION AND COORDINATION OF ALL CONSTRUCTION WITH THE RESPECTIVE UTILITY COMPANIES, PRIOR TO STARTING ANY CONSTRUCTION.
4. ALL CONSTRUCTION ACTIVITY ON THIS SITE SHALL BE PERFORMED IN COMPLIANCE WITH APPLICABLE O.S.H.A. STANDARDS FOR WORKER SAFETY.
5. ALL CONTRACTORS SHALL BE RESPONSIBLE FOR OBTAINING THE MOST UPDATED SET OF CONSTRUCTION PLANS PRIOR TO COMMENCING CONSTRUCTION.
6. ALL CONTRACTORS SHALL BE RESPONSIBLE FOR PROVIDING AS-BUILT INFORMATION TO THE ENGINEERING/SURVEYING COMPANY UPON COMPLETION OF CONSTRUCTION.


Plant Material List

Quantity	Botanical Name	Common Name	Key
8	Acer Rubrum "Autumn Flame"	Armstrong Red Maple	AR
11	Pyrus Calleryana "Chanticleer"	Chanticleer Pear	PC
12	Quercus Palustris	Pin Oak	QP

NOTE:
INSTALLATION OF PLANT MATERIALS SHALL BE IN ACCORDANCE WITH THE CURRENT INDUSTRY STANDARDS OF THE AMERICAN ASSOCIATION OF NURSERYMEN. THE LANDSCAPE CONTRACTOR SHALL PLACE A COMPACTED LAYER OF 4" TOPSOIL OVER AREAS TO BE ESTABLISHED SHRUB BEDS. SUBSTITUTION MAY BE PERMITTED PROVIDED THE NURSERY CAN DEMONSTRATE THAT THE SUBSTITUTION IS SUPERIOR IN QUALITY AND LESS SUSCEPTIBLE TO INSECT DAMAGE.

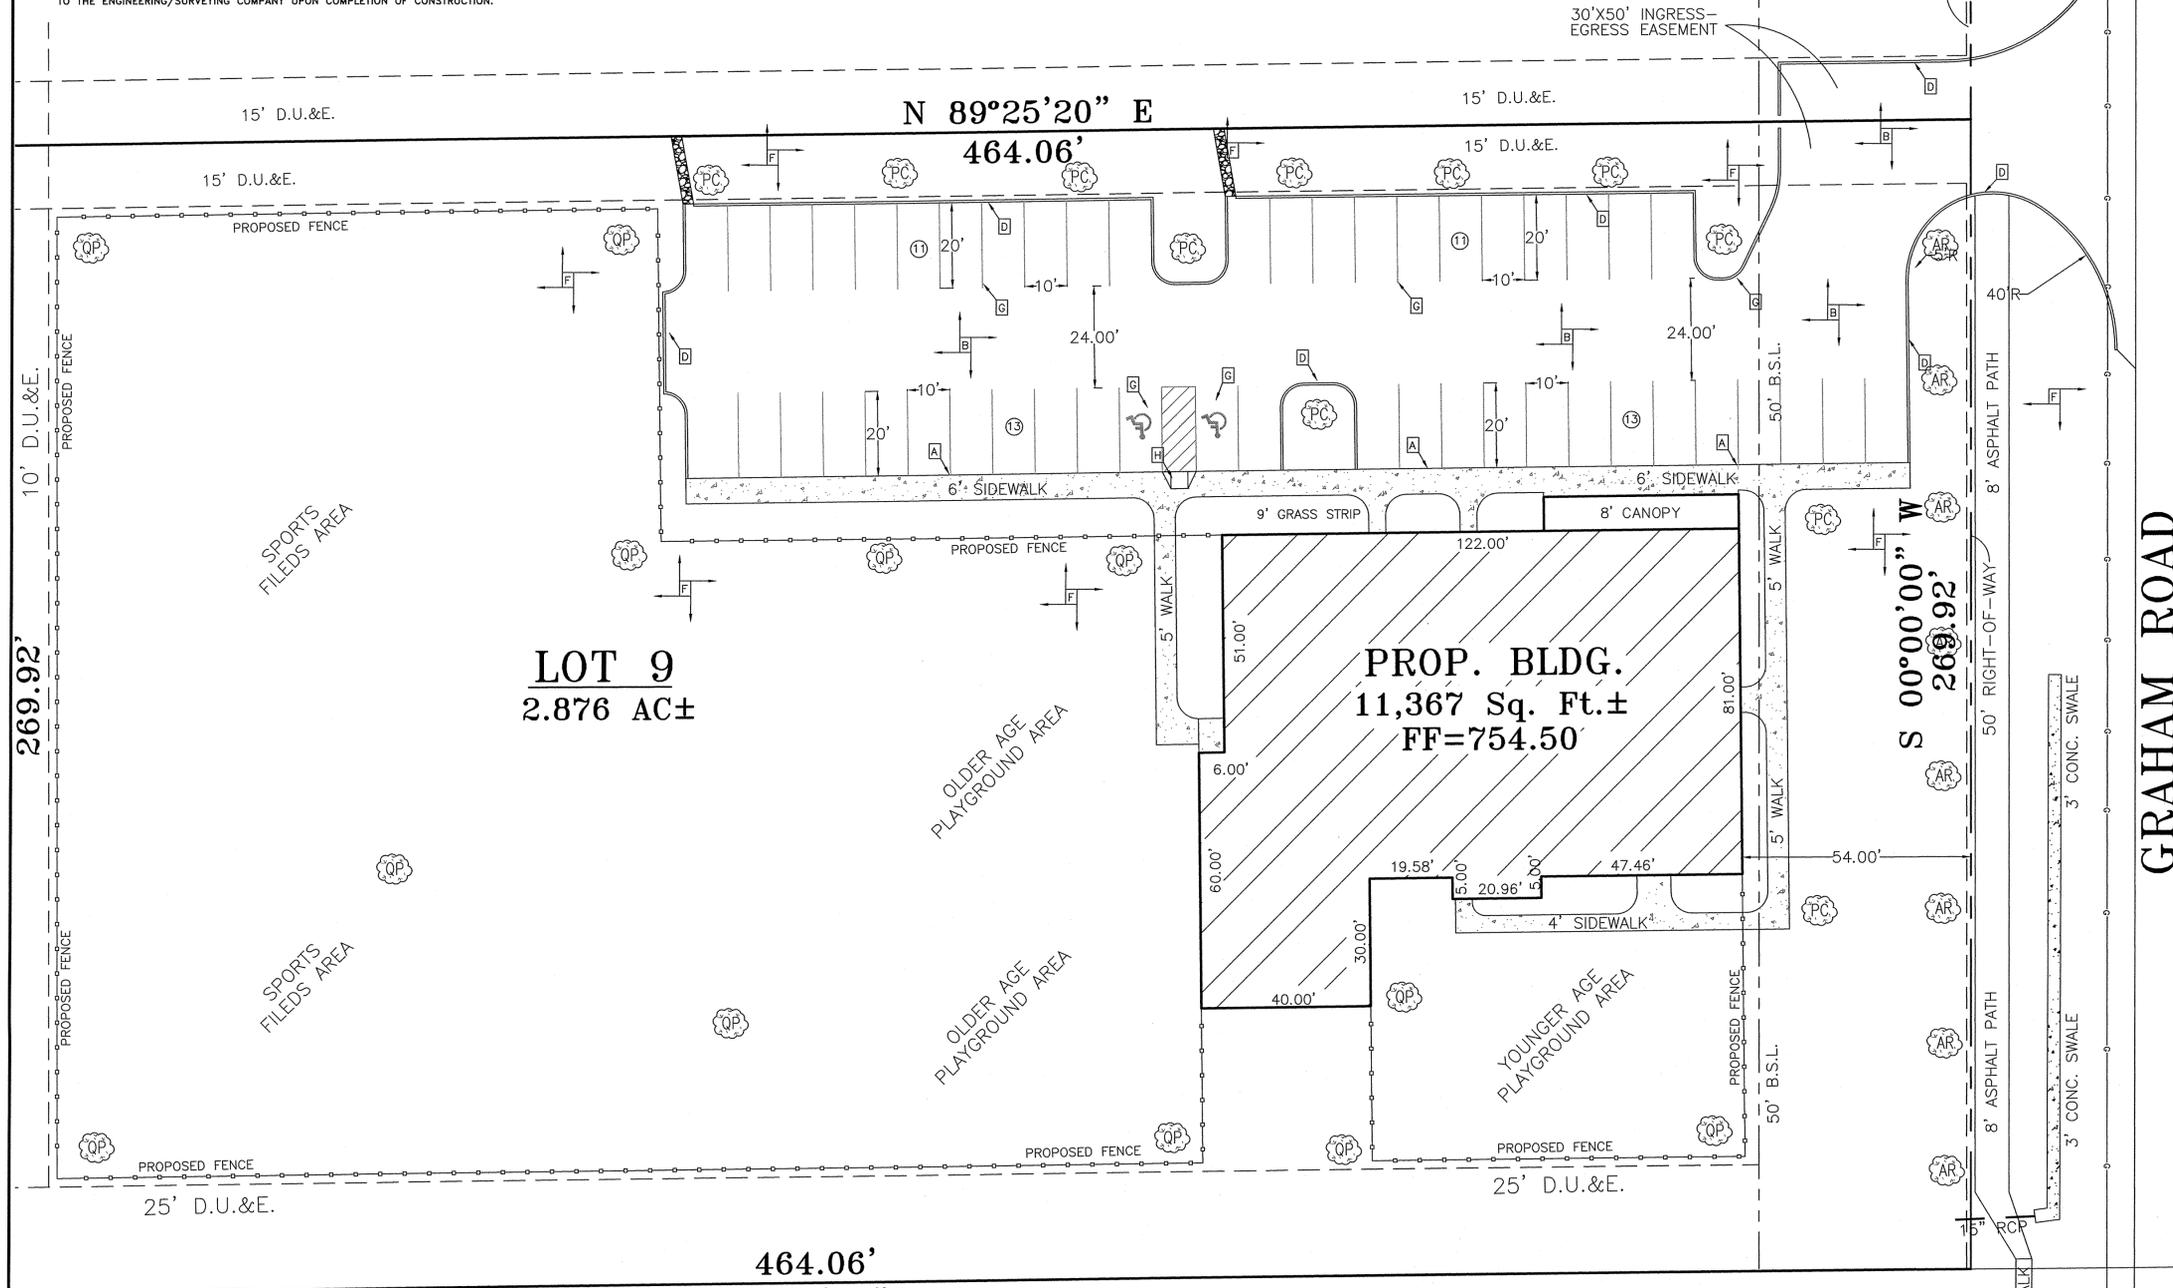

THE WATER AND SANITARY SEWER SERVICE INTO THE BUILDING TO BE COORDINATED WITH THE RESPECTIVE UTILITY COMPANIES. THE LOCATION OF ANY EXISTING SERVICE LINES SHALL BE SHOWN AND IT IS NOT KNOWN WHETHER ANY EXISTING SERVICE LINES HAVE ALREADY BEEN EXTENDED TO THE WEST SIDE OF THE ROAD.

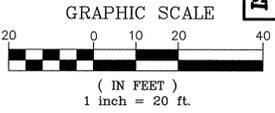

- EXISTING LEGEND**
- EXISTING SANITARY SEWER
 - EXISTING SANITARY MANHOLE
 - EXISTING STORM SEWER
 - EXISTING STORM (BEEHIVE) INLET
 - EXISTING STORM (CURB) INLET
 - EXISTING UTILITY POLE
 - EXISTING GAS VALVE
 - EXISTING GAS LINE
 - EXISTING TELEPHONE PEDESTAL
 - EXISTING CABLE PEDESTAL
 - EXISTING WATERLINE
 - EXISTING WATER METER
 - EXISTING WATER VALVE
 - EXISTING CONTOUR LINE
 - EXISTING UNDERGROUND ELECTRIC
 - EXISTING ELECTRIC TRANSFORMER
 - EXISTING STREET SIGN
 - EXISTING LITE

- PROPOSED LEGEND**
- PROPOSED STORM (CURB) INLET
 - PROPOSED STORM STRUCTURE NUMBER
 - 90' B.S.L. - BUILDING SETBACK LINE
 - PROPOSED FIRE HYDRANT
 - PROPOSED GRADE
 - PROPOSED GRANULAR BACKFILL
 - PROPOSED HANDICAP ACCESSIBLE RAMP

PARKING NOTES

GENERAL DEVELOPMENT NOTES:

PARKING REQUIRED:

1 PER EMPLOYEE	20 EMPLOYEES / 1	20 SPACES
1 PER ON SITE VEHICLE	2 BUSES & 1 VAN / 1	3 SPACES
1 PER 6 CHILDREN @ CAPACITY	150 CHILDREN / 6	25 SPACES
TOTAL SPACES REQUIRED:		48 SPACES


PARKING PROVIDED:

10' X 18' STALLS	47 SPACES
HANDICAP SPACES:	2 SPACES
TOTAL SPACES PROVIDED:	49 SPACES

UTILITY STATEMENT:

THE EXISTING UNDERGROUND UTILITIES SHOW HAVE BEEN LOCATED FROM VISIBLE FIELD EVIDENCE AND/OR EXISTING DRAWINGS. MAURER SURVEYING, INC. (M) MAKES NO GUARANTEES THAT THE UTILITY INFORMATION SHOWN COMPRISES ALL SUCH UTILITIES IN THE AREA. IN SERVICE OR ABANDONED. MAURER SURVEYING, INC. FURTHER STATES THAT THE UNDERGROUND UTILITY DATA SHOWN DOES NOT INDICATE PRECISE LOCATIONS.

THIS DRAWING/COMPUTER FILE IS THE PROPERTY OF MAURER SURVEYING, INC. (M). ANY REPRODUCTION OR REUSE OF THIS DOCUMENT FOR ANY PURPOSE OTHER THAN THE PROJECT FOR WHICH IT WAS ORIGINALLY INTENDED, WITH OR WITHOUT PERMISSION FROM (M), BY ITS USE AGREES TO INDEMNIFY AND HOLD HARMLESS (M) FROM ANY LOSS, INCLUDING BUT NOT LIMITED TO ATTORNEY FEES, OCCURRING FROM THEIR USE.

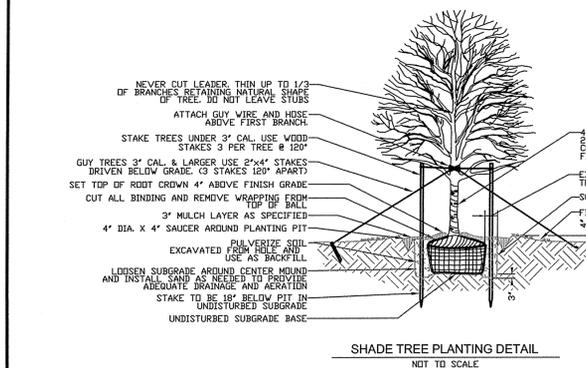

- KEYNOTE LEGEND** (** = SEE DETAIL)
- A — MONOLITHIC CURB & WALK **
 - B — PAVEMENT
 - D — 6" STRAIGHT CURB (OR) TOP SET CURB **
 - E — HANDICAP ACCESSIBLE MARKINGS **
 - F — LAWN
 - G — 4" PAINTED WHITE PARKING STRIPE
 - H — HANDICAP RAMP **

- GENERAL DEVELOPMENT NOTES:**
- 1) ALL WORK SHALL CONFORM TO STATE AND LOCAL REGULATIONS.
 - 2) THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS IN THE FIELD AS SHOWN ON THIS PLAN PRIOR TO STARTING CONSTRUCTION. IF ANY DISCREPANCIES ARE FOUND IN THESE PLANS FROM FIELD CONDITIONS, THE CONTRACTOR SHALL NOTIFY THE ENGINEERS/SURVEYORS IMMEDIATELY.
 - 3) CONTRACTOR SHALL NOTIFY ANY AND ALL UTILITY COMPANIES WITH UTILITIES PRESENT ON SITE 72 HOURS BEFORE STARTING CONSTRUCTION. CONTRACTOR SHALL HAVE UTILITY COMPANIES VERIFY (i.e. LOCATION, DEPTH AND SIZE) ALL UTILITIES WITHIN LIMITS OF CONSTRUCTION.
 - 4) ALL STORM SEWER AND SANITARY SEWER LINES SHALL BE BACKFILLED COMPLETELY WITH ENGINEERED GRANULAR MATERIALS WHEN WITHIN 5' OF PAVEMENT.
 - 5) ALL UTILITY SERVICES INTO THE PROPOSED BUILDING SHALL BE COORDINATED BETWEEN CONTRACTOR, DEVELOPER, ARCHITECT AND THE RESPECTIVE UTILITY COMPANY.
 - 6) CONTRACTOR SHALL PROVIDE POSITIVE DRAINAGE IN ALL AREAS (GRASS/LANDSCAPE AND CONCRETE/PAVEMENT) WHEN SITE WORK IS COMPLETE. TESTS SHALL BE PERFORMED TO INSURE AND CORRECT, IF NECESSARY, ANY PONDING, "BIRD BATH" CONDITIONS
 - 7) CONTRACTOR SHALL RESURFACE AND/OR RECONSTRUCT BACK TO ITS ORIGINAL CONDITION, ANY AREAS DISTURBED BY CONSTRUCTION ACTIVITY AS WELL AS TRAFFIC FROM SUPPLIERS AND SUBCONTRACTORS AFTER CONSTRUCTION WORK IS COMPLETE.
 - 8) SANITARY SEWER SERVICE INTO PROPOSED BUILDING TO BE COORDINATED WITH ARCHITECT.
 - 9) ALL WATERLINE CONSTRUCTION, RELOCATION AND SERVICE INTO THE PROPOSED BUILDING SHALL BE DONE IN ACCORDANCE WITH INDIANA AMERICAN COMPANY STANDARDS AND SPECIFICATIONS.
 - 10) DAMAGE TO EXISTING UTILITIES SHALL BE REPAIRED TO THE SPECIFICATIONS OF THE UTILITY COMPANY AT NO ADDITIONAL EXPENSE TO THE OWNER.

ISSUED FOR REVIEW & COMMENTS
ISSUED FOR CONSTRUCTION

SCALE: 1" = 20'

DATE: 6/11/14

PROJECT NAME: KID CITY ACADEMY
1950 NORTH GRAHAM ROAD, FRANKLIN

SHEET NAME: DIMENSIONAL, UTILITY, & LANDSCAPE PLAN

MAURER SURVEYING, INC.
4800 WEST VALLEY ROAD, STE P, GREENWOOD, IN 46142
OFFICE - 317-861-8888 FAX 317-861-4099
LAND SURVEYING, LAND DEVELOPMENT & BUILDER'S SERVICES

REGISTERED FOR: FIVEKIDS PROPERTIES
96 LEANING TREE ROAD
GREENWOOD, IN 46142

SHEET: C.4

DATE: JUNE 11, 2014

JOB NO.: 1750-C.4

NOTICE, PERMITS, and NOTES

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING OR VERIFYING THAT ALL PERMITS AND APPROVALS ARE OBTAINED FROM THE RESPECTIVE CITY, COUNTY AND STATE AGENCIES PRIOR TO STARTING CONSTRUCTION.
2. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE EXACT LOCATION OF ALL EXISTING UTILITIES IN THE VICINITY OF THE CONSTRUCTION AREA PRIOR TO STARTING ANY CONSTRUCTION.
3. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY FOR NOTIFICATION AND COORDINATION OF ALL CONSTRUCTION WITH THE RESPECTIVE UTILITY COMPANIES, PRIOR TO STARTING ANY CONSTRUCTION.
4. ALL CONSTRUCTION ACTIVITY ON THIS SITE SHALL BE PERFORMED IN COMPLIANCE WITH APPLICABLE O.S.H.A. STANDARDS FOR WORKER SAFETY.
5. ALL CONTRACTORS SHALL BE RESPONSIBLE FOR OBTAINING THE MOST UPDATED SET OF CONSTRUCTION PLANS PRIOR TO COMMENCING CONSTRUCTION.
6. ALL CONTRACTORS SHALL BE RESPONSIBLE FOR PROVIDING AS-BUILT INFORMATION TO THE ENGINEERING/SURVEYING COMPANY UPON COMPLETION OF CONSTRUCTION.

LEGEND

(PS)	- PERMANENT SEED
(SF)	- SILT FENCE
(TS)	- TEMPORARY SEED
(MB)	- EROSION CONTROL BLANKET

UTILITY STATEMENT:
 THE EXISTING UNDERGROUND UTILITIES SHOWN HAVE BEEN LOCATED FROM VISIBLE FIELD EVIDENCE AND/OR EXISTING DRAWINGS. MAURER SURVEYING, INC. (M) MAKES NO GUARANTEES THAT THE UTILITY INFORMATION SHOWN COMPRISES ALL SUCH UTILITIES IN THE AREA, IN SERVICE OR ABANDONED. MAURER SURVEYING, INC. FURTHER STATES THAT THE UNDERGROUND UTILITY DATA SHOWN DOES NOT INDICATE PRECISE LOCATIONS.


THIS DRAWING/COMPUTER FILE IS THE PROPERTY OF MAURER SURVEYING, INC. (M). ANY REPRODUCTION OR REUSE OF THIS DOCUMENT FOR ANY PURPOSE OTHER THAN THE PROJECT FOR WHICH IT WAS ORIGINALLY INTENDED, WITH OR WITHOUT PERMISSION FROM (M), BY ITS USE AGREES TO INDEMNIFY AND HOLD HARMLESS (M) FROM ANY LOSS, INCLUDING BUT NOT LIMITED TO ATTORNEY FEES, OCCURRING FROM THEIR USE.

THIS SHEET FOR EROSION CONTROL PURPOSES ONLY
SEE DETAIL SHEETS FOR EROSION CONTROL DETAILS
SEE SHEET C.6 FOR SUMMARY & ADDITIONAL INFORMATION*

ALL EROSION CONTROL MEASURES SHALL BE IN COMPLIANCE WITH THE INDIANA STORM WATER QUALITY MANUAL - PLANNING AND SPECIFICATION GUIDE FOR EFFECTIVE EROSION AND SEDIMENT CONTROL AND POST-CONSTRUCTION WATER QUALITY.


PROPOSED LEGEND

(Symbol)	- PROPOSED STORM (CURB) INLET
(Symbol)	- PROPOSED STORM STRUCTURE NUMBER
(Symbol)	- BUILDING SETBACK LINE
(Symbol)	- PROPOSED FIRE HYDRANT
(Symbol)	- PROPOSED GRADE
(Symbol)	- PROPOSED GRANULAR BACKFILL
(Symbol)	- PROPOSED HANDICAP ACCESSIBLE RAMP

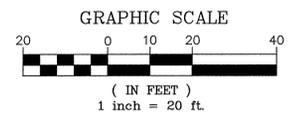

EXISTING LEGEND

(Symbol)	- EXISTING SANITARY SEWER
(Symbol)	- EXISTING SANITARY MANHOLE
(Symbol)	- EXISTING STORM SEWER
(Symbol)	- EXISTING STORM (BEEHIVE) INLET
(Symbol)	- EXISTING STORM (CURB) INLET
(Symbol)	- EXISTING UTILITY POLE
(Symbol)	- EXISTING GAS VALVE
(Symbol)	- EXISTING GAS LINE
(Symbol)	- EXISTING TELEPHONE PEDESTAL
(Symbol)	- EXISTING CABLE PEDESTAL
(Symbol)	- EXISTING FIRE HYDRANT
(Symbol)	- EXISTING WATERLINE
(Symbol)	- EXISTING WATER METER
(Symbol)	- EXISTING WATER VALVE
(Symbol)	- EXISTING CONTOUR LINE
(Symbol)	- EXISTING UNDERGROUND ELECTRIC
(Symbol)	- EXISTING ELECTRIC TRANSFORMER
(Symbol)	- EXISTING STREET SIGN
(Symbol)	- EXISTING LITE

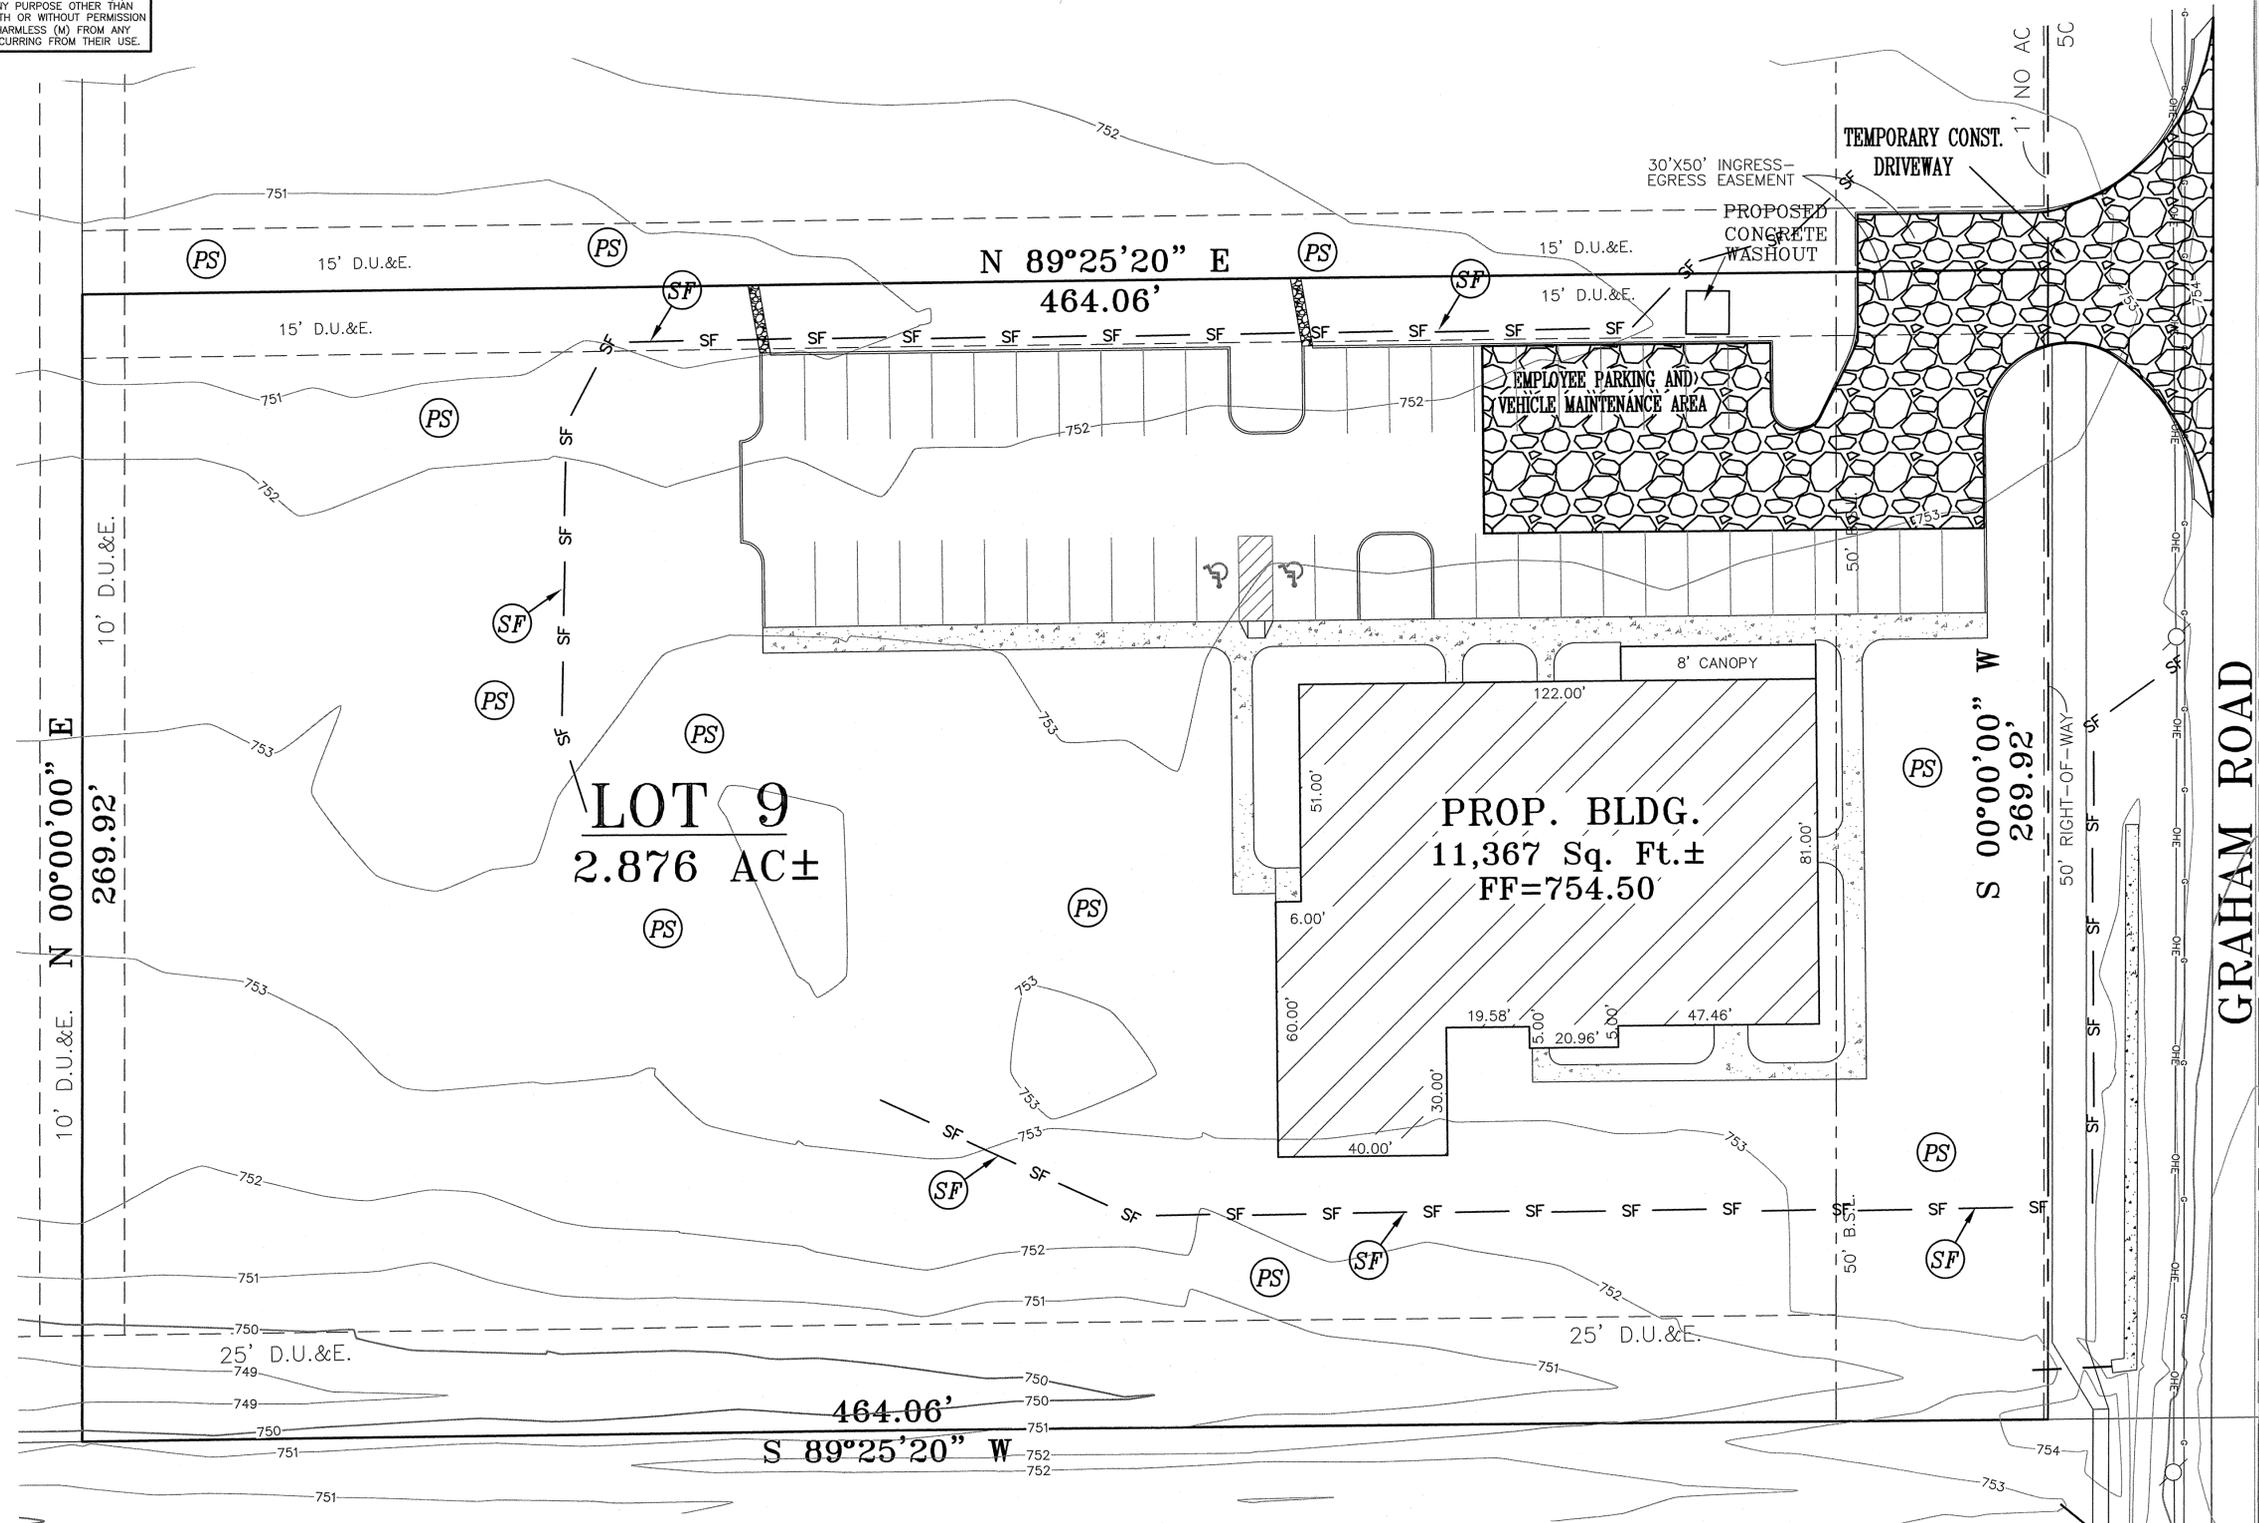

**ISSUED FOR REVIEW & COMMENTS
 ISSUED FOR CONSTRUCTION**

SCALE: 1"=20'	DATE: 06/11/2014
DRAWN BY: AB	CHECKED BY: PM
PROJECT NO. 880006	SHEET NO. 17
MAURER SURVEYING, INC. GREENWOOD, IN 46142	

KID CITY ACADEMY
 1950 NORTH GRAHAM ROAD, FRANKLIN
EROSION CONTROL PLAN

MAURER SURVEYING, INC.
 4800 WEST SMITH VALLEY ROAD, STE P GREENWOOD, IN 46142
 OFFICE - 317-861-3886 FAX 317-861-4099
 LAND SURVEYING, LAND DEVELOPMENT & BUILDER'S SERVICES

SHEET	C.5
DATE	JUNE 11, 2014
JOB NO.	1750-C.5

HOLEY MOLEY SAYS,
"DON'T DIG BLIND"
 1-800-382-5544
 1-800-428-5200
 FOR CALLS OUTSIDE OF INDIANA

PROJECT INDEX

Assessment of Construction Plan Elements (Section A)

- A1 - Index showing locations of required Plan Elements
- A2 - 11 by 17 inch Site Plan
- A3 - Narrative describing the nature and purpose of the project
- Kid City Academy is a 2,876 Acre Industrial Use Parcel. This project is for a new Day Care Facility that includes 11,367 square foot building and parking addition.
- A4 - Vicinity map showing project location
- A Vicinity Map is shown on the Title Sheet for this set of plans.
- A5 - Legal Description of the Project Site
- The legal description for this site is shown on the Existing Site Conditions (Sheet # C.2), and this sheet.
- A6 - Location of all lots and proposed site improvements (roads, utilities, structures, etc.)
- The location of all proposed site improvements are as shown on the Dimensional Plan, Sheet C.4 of this set of plans.
LATITUDE: N39°30'21" LONGITUDE: W86°03'21"
- A7 - Hydrologic unit code (14 digit)
- The hydrologic unit code for this site is 05120201150160
- A8 - Notation of any State or Federal water quality permits.
- NONE REQUIRED.
- A9 - Specific points where stormwater discharge will leave the site
- The stormwater runoff from this proposed site will flow Northwesterly and Southwesterly to an existing swales. The existing swales flow to an existing detention pond designed for the development area.
- A10 - Location and name of all wetlands, lakes, and watercourses on and adjacent to the site
- This proposed development lies within the Canary Ditch Watershed. No wetlands or Lakes are on site or adjacent to the site.
- A11 - Identification of all receiving waters
- This site lies within the Canary Ditch Watershed.
- A12 - Identification of potential discharges to ground water (abandoned wells, sinkholes, etc.)
- No discharge to ground water will occur. Runoff from the site will be sheet drained to the existing swales and flows into the existing detention area.
- A13 - 100-year floodplains, floodways, and floodway fringes
- The 100 yr floodway, floodplains, and flood fringe will lie within the banks of the proposed pond.
- A14 - Pre-construction and post construction estimate of Peak Discharge (10-year storm event)
- The pre-development peak discharge for the 10-year storm event for the site = N/A
- The post-development peak discharge for the 10-year storm event for the site = N/A
- A15 - Adjacent land use, including upstream watershed
- Graham Road to the East, empty Industrial parcels to the North and West, and Industrial Building to the South.
- A16 - Locations and approximate boundaries of all disturbed areas (Construction Limits)
- See detail this sheet, which depicts the total disturbed area for the site
- A17 - Identification of existing vegetation cover
- The existing vegetation for this site is grass.
- A18 - Soils map including soil descriptions and limitations Per Indiana Erosion Control Manual
- See Soils Map this sheet
- Br = Brookston Silt Clay Loam, 0 to 2 percent slopes. This nearly level soil is on fill plains. Runoff is poorly drained. Wellness is the main limitation to use of this soil.
- CrA = Crosby Silt Loam, 0 to 2 percent slopes - This soil is in fill plains. Wellness is the main limitation of this soil. Runoff is somewhat poorly drained.
- CsB2 = Crosby-silt loam, 2 to 4 percent slopes - This soil is in fill plains. Wellness is the main limitation of this soil. Runoff is somewhat poorly drained.
- A19 - Locations, size and dimensions of proposed stormwater systems (e.g pipes, swales and channels)
- The location of the proposed stormwater system is as shown on this plan. The size of all stormwater systems are as shown on sheet C.3 of these construction plans.
- A20 - Plans for any off-site construction activities associated with this project (sewer/water tie-ins)
- None
- A21 - Locations of proposed soil stockpiles and/or borrow/disposal areas
- None
- A22 - Existing site topography at an interval appropriate to indicate drainage patterns
- See the Existing Site Conditions sheet being sheet C.2 of these plans
- A23 - Proposed final topography at an interval appropriate to indicate drainage patterns
- See the Grading Plan being sheet C.3 of these plans

Assessment of Stormwater Pollution Prevention Plan (Section B)

- B1 - Description of Potential pollutant sources associated with construction activities
- The potential pollutant sources associated with construction activities for this site would be material used for construction of the site, fuel storage areas, fueling locations, leaking vehicles and equipment, which could be exposed to the soils within the development. The contractor is urged to protect the site and maintain a single storage and fueling area on site. Although fuel leakage will happen, the contractor is urged to maintain this area so that pollutants to the soil is kept to a minimum. All pollutants that could enter the stormwater during construction would be routed through proposed water quality structures.
- Contractor to clean any spills immediately to protect the soils from pollutants.
- B2 - Sequence describing stormwater quality measure implementation relative to land disturbing activities:
- Install perimeter sediment control measures (e.g. silt fence)
- Silt fence and appropriate erosion control measures shall be installed prior to any construction.
- Silt fence to be "NUTEC 3 NWS-6" or approved equal.
- Install stone for construction entrance and employee parking and vehicle maintenance area.
- As areas are brought to rough grade, permanent seed fertilizer & mulch
- Construct basin and stabilize side slopes with permanent seed and mulch or blanket
- Construct forebays and set sediment marker as shown in detail on sheet 5.
- Protect storm inlets immediately after installation
- All installed erosion and sediment control practices must be monitored at least weekly and again after each rain event. Any noted deficiencies must be corrected immediately.
- Any area of disturbed soil, which will remain inactive for 15 days or more must be seeded with the appropriate temporary vegetative covers. (see temp. seeding dates)
- The contractor/developer has full responsibility of inspecting the erosion control measures on a daily basis. At a minimum, practices need to be inspected weekly, after each storm event, and daily during prolonged storm events. Inspection of practices during a storm event is advantageous because the inspector can easily identify where measures need to be repaired or replaced. Failing practices should be repaired or replaced immediately.
- Builders are to coordinate staging of erosion control as per detail labeled "Construction Sequence of Building Site Erosion Control Practices"
- Developers and Contractors must meet the design criteria, standards and specifications outlined in the Indiana Handbook for Erosion Control in Developing Areas.
- Developer to place permanent seed on all side and rear easement areas and temporary seed in all other areas, at appropriate time during construction
- Marion County and the State has the right to require additional erosion control measures in the field as conditions warrant.
- See Details sheets of these plans for installation, Application and methods for erosion control devices and practices.
- All slopes exposed during construction shall have SC-150 Erosion Control Blankets installed on them.
- B3 - Stable construction entrance locations and specifications (at all points of ingress and egress)
- Construction entrance are proposed as shown on sheet C.5.
- B4 - Sediment control measures for sheet flow areas
- The majority of this site is sheet flow.
- B5 - Sediment control measures for concentrated flow areas
- All swale and street areas will maintain a concentrated flow. This plan shows the proposed seeding and sequence for these areas along with the proposed inlet protection.
- B6 - Storm sewer inlet protection measures, locations and specifications
- Inlet protection is shown on this plan. See Details sheets for details and specifications.
- B7 - Runoff control measures (e.g. diversions, rock check dams, slope drains, etc.)
- Sediment in run-off water shall be trapped by the use of such methods as debris basins and silt traps until the disturbed area is stabilized.
- B8 - Storm water outlet protection specifications
- 20 square yards of 12" hand laid rip rap to be installed at the upstream side of the outlet structure and 15 square yards of 12" hand laid rip rap to be installed on the downstream side of the outlet pipe.
- B9 - Grade stabilization structures, locations and specifications
- These items are not proposed within this development
- B10 - Location, dimensions, specifications, and construction details of each stormwater quality measure
- All proposed measures are as shown on this plan, details of each measure are shown on sheet 8.
- B11 - Temporary surface stabilization methods appropriate for each season (including sequencing)
- No Temporary seeding is needed.
- B12 - Permanent surface stabilization specifications (include sequencing)
- Permanent surface stabilization is as shown on sheet C.5.

- B13 - Material handling and spill prevention plan
- The potential pollutant sources associated with construction activities for this site would be material used for construction of the site, fuel storage areas, fueling locations, leaking vehicles and equipment, which could be exposed to the soils within the development. The contractor is urged to protect the site and maintain a single storage and fueling area on site. Although fuel leakage will happen, the contractor is urged to maintain this area so that pollutants to the soil is kept to a minimum. All pollutants that could enter the stormwater during construction would be routed through proposed water quality structures.
- Contractor to clean any spills immediately to protect the soils from pollutants.
- B14 - Monitoring and maintaining guidelines for each proposed stormwater quality measure
- The contractor/developer has full responsibility of inspecting the erosion control measures on a daily basis. At a minimum, practices need to be inspected weekly, after each storm event, and daily during prolonged storm events. Inspection of practices during a storm event is advantageous because the inspector can easily identify where measures need to be repaired or replaced. Failing practices should be repaired or replaced immediately. See this sheet and sheet C.5 for details.
- B15 - Erosion & sediment control specifications for individual building lots
- Builders are to coordinate staging of erosion control as per detail labeled "Construction Sequence of Building Site Erosion Control Practices"
- Developers and Contractors must meet the design criteria, standards and specifications outlined in the Indiana Handbook for Erosion Control in Developing Areas.

Stormwater Pollution Prevention Plan - Post Construction Component (Section C)

- C1 - Description of pollutants and their sources associated with the proposed land use
- The potential pollutants for this proposed land use are grease, oil, fertilizers, etc.
- C2 - Sequence describing stormwater quality measure implementation
- Permanent stabilization (i.e. seeding, erosion control blanket) shall be implemented as construction disturbances have been eliminated. The dry detention area shall be inspected after each storm event until good stabilization has been acquired. The Aqua Swirl water quality structure shall be inspected as outlined in the BMP O & M Manual.
- C3 - Description of proposed post construction stormwater quality measures
- An Aqua-Swirl Model AS-3 water quality structure is being used for the post construction water quality.
- Grass swales increase infiltration into the soil and the grass helps to take up nutrients in run-off in and before the dry detention
- C4 - Location, dimensions, specifications, and construction details of each stormwater quality measure.
- All proposed measures are as shown on these plans and details.
- C5 - Description of maintenance guidelines for post construction stormwater quality measures
- Proposed storm sewer inlets shall be monitored to ensure sediment accumulation does not obstruct proper flow/function. All grass areas to be monitored to ensure a vigorous vegetative growth. All BMP maintenance should be as stated in the BMP Operation and Maintenance Manual.

NOTE:

A SELF-MONITORING PROGRAM THAT INCLUDES THE FOLLOWING MUST BE IMPLEMENTED:

- A) A TRAINED INDIVIDUAL SHALL PERFORM A WRITTEN EVALUATION OF THE PROJECT SITE:
 1. BY THE END OF THE NEXT BUSINESS DAY FOLLOWING EACH MEASURABLE STORM EVENT; AND
 2. AT A MINIMUM OF ONE (1) TIME PER WEEK.
- B) THE EVALUATION MUST ADDRESS:
 1. THE MAINTENANCE OF EXISTING STORM WATER QUALITY MEASURES TO ENSURE THEY ARE FUNCTIONING PROPERLY; AND
 2. IDENTIFY ADDITIONAL MEASURES NECESSARY TO REMAIN IN COMPLIANCE WITH ALL APPLICABLE STATUTES AND RULES.
- C) WRITTEN EVALUATION REPORTS MUST INCLUDE:
 1. THE NAME OF THE INDIVIDUAL PERFORMING THE ACTION;
 2. THE DATE OF THE EVALUATION;
 3. PROBLEMS IDENTIFIED AT THE PROJECT SITE; AND
 4. DETAILS OF CORRECTIVE ACTIONS RECOMMENDED AND COMPLETED.

TEMPORARY SEEDING DATES

	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEPT	OCT	NOV	DEC
WHEAT OR RYE												
OATS												
ANNUAL RYEGRASS												

PERMANENT SEEDING DATES

	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEPT	OCT	NOV	DEC
NON-IRRIGATED*												
IRRIGATED*												
DORMANT SEEDING**												

IRRIGATION NEEDED DURING THIS PERIOD, TO CONTROL EROSION AT TIMES OTHER THAN IN THE SHADDED AREAS, USE MULCH.
* LATE SUMMER SEEDING DATES MAY BE EXTENDED 5 DAYS IF MULCH IS APPLIED.
** INCREASE SEEDING RATE BY 50 PERCENT.

SEEDING LEGEND

TEMPORARY SEED: SEE NOTE BELOW FOR AREAS TO BE SEEDED
ALL BARE AREAS SCHEDULED TO BE LEFT IDLE FOR 15 DAYS OR MORE MUST BE STABILIZED WITH TEMPORARY SEEDING AND/OR MULCHING
ANNUAL RYEGRASS AT 1 LB. PER 1000 SQ. FT.
STRAW MULCH AT 2 TONS PER ACRE

PERMANENT SEED:
KENTUCKY BLUEGRASS AT 40 LBS. PER ACRE
CREeping RED FESCUE AT 40 LBS. PER ACRE
STRAW MULCH AT 2 TONS PER ACRE

TEMPORARY SEED:
ANNUAL RYEGRASS AT 40 LB. PER ACRE
SPRING OATS AT 1100 LBS. PER ACRE

SEEDING NOTE:

ALL TEMPORARY SEEDING SHALL BE DONE IN ACCORDANCE WITH SECTION 3.11 OF THE "INDIANA HANDBOOK FOR EROSION CONTROL IN DEVELOPING AREAS".
ALL PERMANENT SEEDING SHALL BE DONE IN ACCORDANCE WITH SECTION 3.12 OF THE "INDIANA HANDBOOK FOR EROSION CONTROL IN DEVELOPING AREAS".

ADDITIONAL NOTES:


-THE SILT FENCE AND APPROPRIATE EROSION CONTROL SHALL BE INSTALLED PRIOR TO ANY CONSTRUCTION.
-ALL SLOPES EXPOSED DURING CONSTRUCTION SHALL HAVE SC-150 EROSION CONTROL BLANKETS INSTALLED ON THEM.
-ALL SILT FENCE MATERIAL SHALL BE "NUTEC 3 NWS-6 OR APPROVED EQUAL."

THIS SHEET FOR EROSION CONTROL PURPOSES ONLY
SEE DETAIL SHEET FOR EROSION CONTROL DETAILS


LEGAL DESCRIPTION

A part of the Northwest Quarter of Section 11, Township 12 North, Range 4 East of the Second Principal Meridian, Johnson County, Indiana, being more particularly described as follows:
Lot 9 RW INDUSTRIAL PARK SECTION AND REPLAT OF LOT NO. 2 SECTION ONE as recorded in Instrument Number 2014-002127, in the Office of the Johnson County Recorder, containing 2.876 acres, more or less.
Subject to all Rights-of-Way, Easements, and Restrictions.

TOTAL DISTURBED AREA

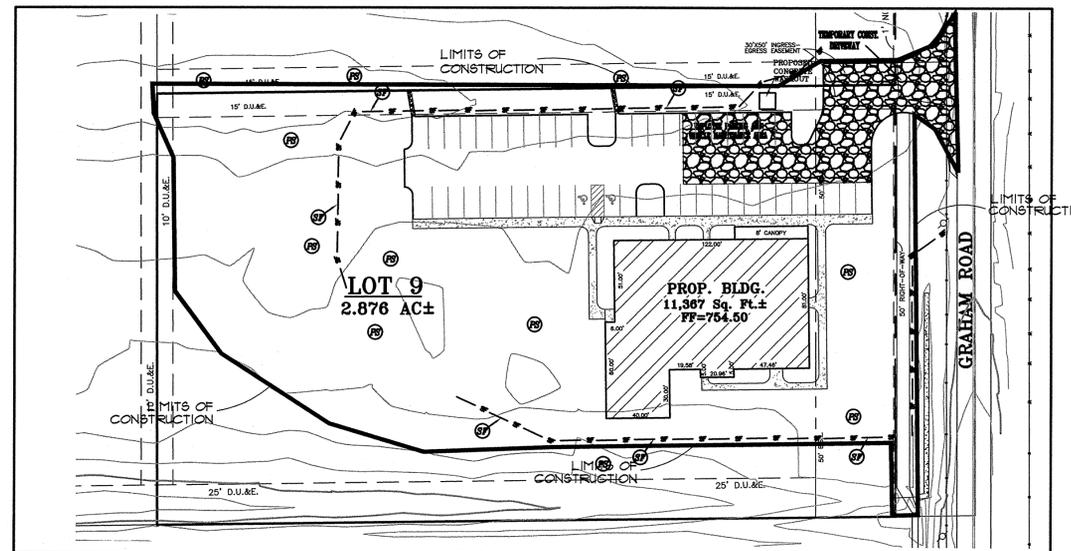

SOILS MAP

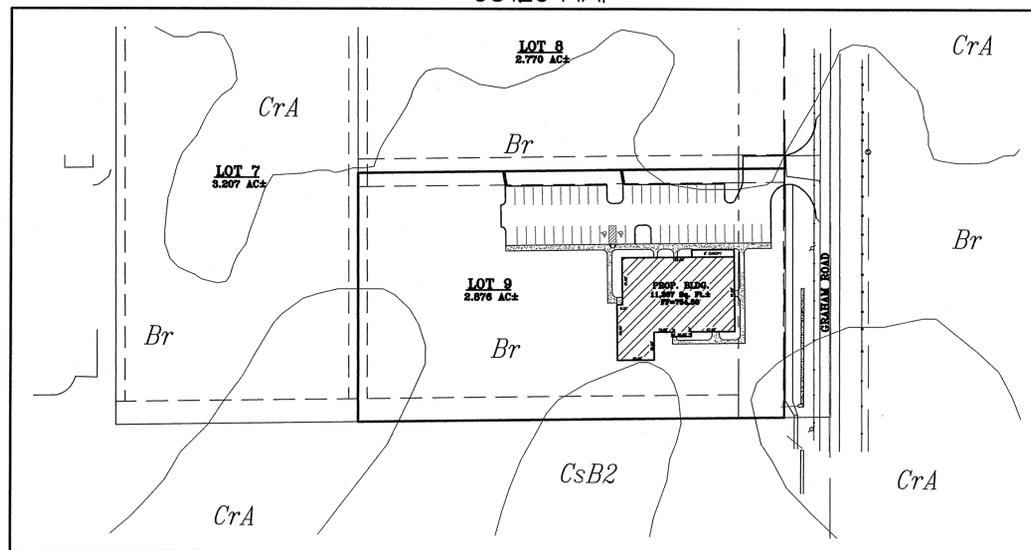

ALL EROSION CONTROL MEASURES SHALL BE IN COMPLIANCE WITH THE INDIANA STORM WATER QUALITY MANUAL - PLANNING AND SPECIFICATION GUIDE FOR EFFECTIVE EROSION AND SEDIMENT CONTROL AND POST-CONSTRUCTION WATER QUALITY.

ISSUED FOR REVIEW & COMMENTS
ISSUED FOR CONSTRUCTION

DATE: _____
REVISION: _____

SCALE: _____
NO. 880006
STATE OF INDIANA

PROJECT NAME: _____
SHEET NAME: _____

KID CITY ACADEMY
1950 NORTH GRAHAM ROAD, FRANKLIN
EROSION CONTROL PLAN

MAURER SURVEYING, INC.
4800 WEST SMITH VALLEY ROAD, STE. P, GREENWOOD, IN 46142
OFFICE - 317-861-3698 FAX 317-861-4099
LAND SURVEYING, LAND DEVELOPMENT & BUILDER'S SERVICES
PREPARED FOR:
FIVEKIDS PROPERTIES
96 LEANING TREE ROAD
GREENWOOD, IN 46142


HOLEY MOLEY SAYS,
"DON'T DIG BLIND"

1-800-382-5544
1-800-428-5200
FOR CALLS OUTSIDE OF INDIANA

SHEET
C.6
DATE
JUNE 11, 2014
JOB NO.
1750-C.6


UTILITY STATEMENT:
THE EXISTING UNDERGROUND UTILITIES SHOW HAVE BEEN LOCATED FROM VISIBLE FIELD EVIDENCE AND/OR EXISTING DRAWINGS. MAURER SURVEYING, INC. (M) MAKES NO GUARANTEES THAT THE UTILITY INFORMATION SHOWN COMPRISES ALL SUCH UTILITIES IN THE AREA, IN SERVICE OR ABANDONED. MAURER SURVEYING, INC. FURTHER STATES THAT THE UNDERGROUND UTILITY DATA SHOWN DOES NOT INDICATE PRECISE LOCATIONS.

THIS DRAWING/COMPUTER FILE IS THE PROPERTY OF MAURER SURVEYING, INC. (M). ANY REPRODUCTION OR REUSE OF THIS DOCUMENT FOR ANY PURPOSE OTHER THAN THE PROJECT FOR WHICH IT WAS ORIGINALLY INTENDED, WITH OR WITHOUT PERMISSION FROM (M), BY ITS USE AGREES TO INDEMNIFY AND HOLD HARMLESS (M) FROM ANY LOSS, INCLUDING BUT NOT LIMITED TO ATTORNEY FEES, OCCURRING FROM THEIR USE.

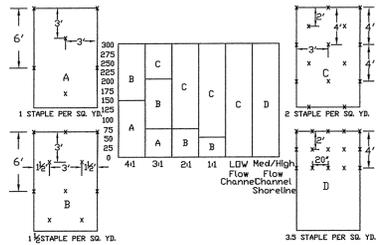


NOTE: HORIZONTAL STAPLE SPACING SHOULD BE ALTERED IF NECESSARY TO ALLOW STAPLES TO SECURE THE CRITICAL POINTS ALONG THE CHANNEL SURFACE.

CRITICAL POINTS
 A. OVERLAPS AND SEAMS
 B. PROJECTED WATER LINE
 C. CHANNEL BOTTOM SIDE
 D. SLOPE VERTICES




GENERAL STAPLE PATTERN AND RECOMMENDATIONS

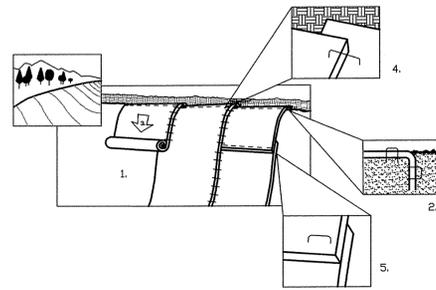

1. PREPARE SOIL BEFORE INSTALLING BLANKETS, INCLUDING APPLICATION OF LIME, FERTILIZER AND SEED. NOTE: WHEN USING SCC225, DO NOT SEED PREPARED AREA. SCC225 MUST BE INSTALLED WITH PAPER SIDE DOWN.
 2. BEGIN AT THE TOP OF THE SLOPE BY ANCHORING THE BLANKET IN A 6" DEEP X 6" WIDE TRENCH. BACKFILL AND COMPACT THE TRENCH AFTER STAPLING.
 3. ROLL THE BLANKETS DOWN THE SLOPE IN THE DIRECTION OF THE WATER FLOW.
 4. THE EDGES OF PARALLEL BLANKETS MUST BE STAPLED WITH APPROXIMATELY 2" OVERLAP.
 5. WHEN BLANKETS MUST BE SPLICED DOWN THE SLOPE, PLACE BLANKETS END OVER END (SHINGLE STYLE) WITH APPROXIMATELY 6" OVERLAP. STAPLE THROUGH OVERLAPPED AREA, APPROXIMATELY 12" APART.
- REFER TO GENERAL STAPLE PATTERN GUIDE FOR CORRECT STAPLE PATTERN RECOMMENDATIONS FOR SLOPE INSTALLATIONS.


SLOPE APPLICATIONS for EROSION CONTROL BLANKET

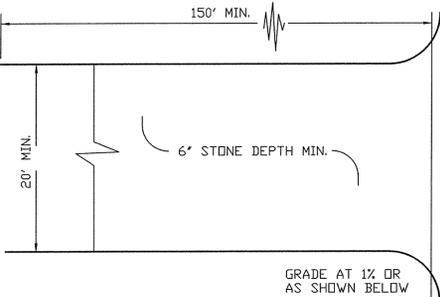

PLAN VIEW

1. STONE SIZE SHALL CONFORM TO ASTM D48 SIZE #1 (2" TO 3" DIA.)
2. PERIODIC STONE TOP DRESSING & WASHING AS REQUIRED.


TEMPORARY CONSTRUCTION ENTRANCE DETAIL

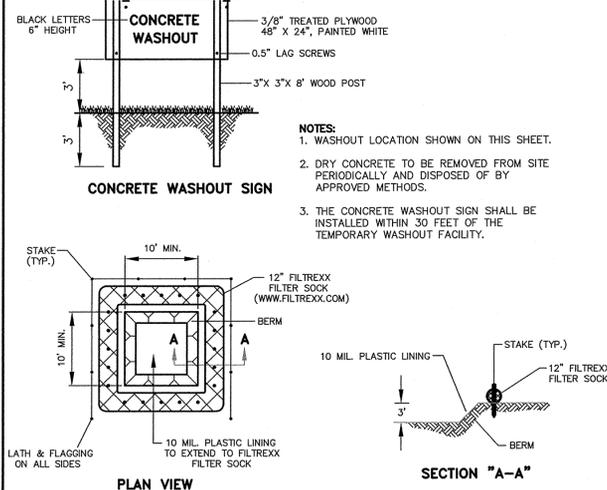

CONCRETE WASHOUT AREA


SILT FENCE FABRIC SPECIFICATIONS
 POLYFELT TS600 OR EQUIVALENT

PROPERTY	TEST PROCEDURE	UNIT	VALUE
GRAB TENSILE	ASTM D4632	POUNDS	165
GRAB ELONGATION	ASTM D4632	PERCENT	>50
PUNCTURE	ASTM D4833	POUNDS	90
TRAPEZOIDAL TEAR	ASTM D4533	POUNDS	75
MULLEN BURST	ASTM D3786	PSI	255
WATER FLOW RATE	ASTM D4491	gpm/ft ²	170
PERMITTIVITY	ASTM D4491	SEC	2.0
PERMEABILITY, K	ASTM D4491	CM/SEC	0.4
A.O.S.	ASTM D4751	Slieve Size	100-60
FABRIC WEIGHT	ASTM D4751	MM	0.15-0.25
THICKNESS	ASTM D1777	M	6.0
UV RESISTANCE (500 HOURS)	ASTM D4355	PERCENT STRENGTH RETAINED	>80

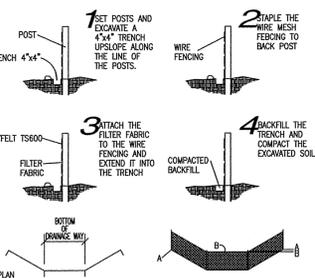

FILTER FENCE INSTALLATION DETAIL

- STEP 1. EVALUATE THE SITE.**
 Before construction, evaluate the entire site, marking for protection any important trees and associated rooting zones, unique areas to be preserved, on site septic system absorption fields, and vegetation suitable for filter strips, especially in perimeter areas.
- Identify Vegetation To Be Saved.**
 -Select and identify the trees, shrubs, and other vegetation that you want to save (see "Vegetative Filter Strips" under Step 2 below).
- Protect Trees and Sensitive Areas.**
 -To prevent root damage, do not grade, burn, place soil piles, or park vehicles near trees or in areas marked for preservation.
 -Place plastic mesh or snow fence barriers around the tree's drip line to protect the area below their branches.
 -Place a physical barrier, such as plastic fencing, around the area designated for a septic system absorption field (if applicable).
- STEP 2. INSTALL PERIMETER EROSION AND SEDIMENT CONTROLS.**
 Identify the areas where sediment-laden runoff could leave the construction site, and install perimeter controls to minimize the potential for off-site sedimentation. It's important that perimeter controls are in place before any other earth-moving activities begin.
- Protect Down-Slope Areas.**
 -On slopes of less than 6 percent, preserve a 20 to 30 foot wide vegetative buffer strip around the perimeter of the property, and use it as a filter strip for tapping sediment.
 -Do not mow filter strip vegetation shorter than 4 inches.
 -Use silt fencing along the perimeter of the lot's downslope side(s) to trap sediment (see Exhibit #3).
- Install Gravel Drive.**
 -Restrict all lot access to this drive to prevent vehicles from tracking mud onto roadways (see Exhibit #4)
- Protect Storm Sewer Inlets.**
 -Protect nearby storm sewer drop inlets with stone-filled or gravel-filled geotextile bags (see Exhibit #1) or equivalent measures before disturbing soil.
 -Protect nearby storm sewer curb inlets with stone-filled or material (see Exhibit #2), straw bales, or equivalent measures before disturbing soil.
- Salvage and Stockpile the Topsoil/Subsoil.**
 -Remove topsoil (typically the upper 4 to 6 inches of soil material) and stockpile.
 -Remove subsoil and stockpile separately from the topsoil.
 -Locate the stockpile away from any downspout street, driveway, stream, lake, wetland, ditch, or drainageway.
 -Immediately after stockpiling, temporary-seed the stockpiles with annual ryegrass or winter wheat and/or place sediment barriers around the perimeter of the piles.

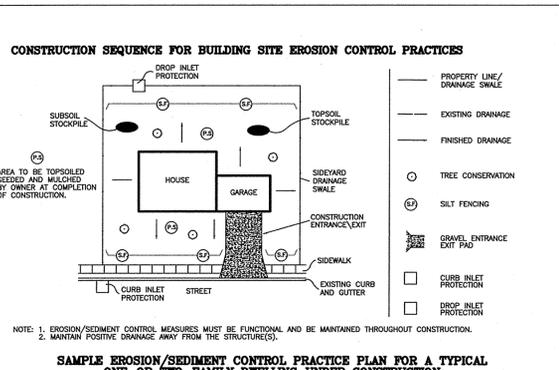

- STEP #3. PREPARE THE SITE FOR CONSTRUCTION.**
 Prepare the site for construction and for installation of utilities. Make sure all contractors (especially the excavating contractor) are aware of areas to be protected.
- Install Downspout Extenders.**
 -Although not required, downspout extenders are highly recommended as a means of preventing lot erosion from roof runoff.
 -Add the extenders as soon as the gutters and downspouts are installed (see Exhibit #5).
 -Be sure the extenders have a stable outlet, such as the street, sidewalk, or a well vegetated area.

SITE WORK GENERAL NOTES AND SPECIFICATIONS

GENERAL: WHEREVER A CONFLICT OR DEFICIENCY OCCURS BETWEEN THE CONSTRUCTION STANDARDS AND SPECIFICATIONS ADOPTED BY THE CITY OF FRANKLIN, THE HIGHER OR MORE RESTRICTIVE STANDARD OR SPECIFICATION SHALL APPLY.

A. NOTICES AND PERMITS

1. The contractor shall be responsible for obtaining or verifying that all permits and approvals are obtained from the respective city, county and state agencies prior to starting construction.
2. It shall be the Contractor's responsibility to determine the exact location of all existing utilities in the vicinity of the construction area prior to starting construction.
3. It shall be the Contractor's responsibility for notification and coordination of all construction with the respective utility companies.
4. It shall be the responsibility of the Developer and Contractor to maintain quality control throughout the project; failure to do so may result in removal and replacement of the defective work. It is recommended that the Developer have a qualified inspector on the job site at all times during construction.
5. It is essential that the work to be done in conjunction with this project shall be installed according to these specifications. The Engineer will be required to certify to certain portions of this project upon completion. Therefore, it is necessary to obtain approval and acceptance by the City of Franklin that construction was done in compliance with these plans and specifications.

B. CLEARING AND GRUBBING

1. Clearing and grubbing shall consist of cutting, removal and satisfactory disposal of all trees, down timber, brush, projecting roots, stumps, rubbish, boulders, broken concrete, fencing (as designated) and other material on the project site and within the boundary as shown on the Construction Documents and/or as designated by "Construction Limits".
2. Special care shall be taken to insure that the trees to be left remaining in the project area shall not receive limbs, bark or root injuries. When such injuries occur, all rough edges of scarred areas shall be removed in accordance with accepted horticultural practice and the scars coated thoroughly with an asphaltum base tree paint.
3. All "unsuitable material" from clearing operations stated in Item B-1 shall be removed to disposal area(s) off of the project site; unless a "bury fill" shall be utilized in an area where it shall not be beneath building areas and/or pavement areas and shall not be located in an area where storm drainage structures shall be located or where impoundment of surface drainage may occur.
4. Materials shall not be disposed of by burning unless approved by the local Fire Marshal.

C. TREE REMOVAL AND PROTECTION

1. Trees shall be removed from the project site only where the area is to be occupied by road and surface areas in accordance with specifications of City of Franklin.
2. Trees shall be removed from the project site as directed by the Developer and so designated.
3. Trees shall be removed from the project site where they interfere directly with the placement of storm or sanitary sewers and that such excavation is or will be fatal to such adjacent trees.
4. The Contractor shall endeavor to save and protect trees of value and worth which do not impair construction of improvements as designated. In the event cut or fill exceeds 0.5 foot over the root area, the Developer shall be consulted with respect to protective measures to be taken, if any, to preserve such trees.
5. The Contractor shall be responsible for determining the method for protection of tops, trunks and roots of existing trees on the project site that are to remain. Existing trees subject to construction damage shall be boxed, fenced or otherwise protected before any adjacent work is started. Earth or material and equipment shall not be stockpiled or stored within the spread of branches. Branches which need to be removed or are broken shall be neatly trimmed and scars shall be covered with tree paint.

D. STRIPPING OF TOPSOIL

1. The Contractor shall verify that all topsoil has been removed in the areas to be occupied by road, walks and designated building areas. Topsoil shall be removed to a depth of six (6) inches or deeper, if necessary, to remove vegetable matter where required.
2. Topsoil shall be kept separated from suitable fill materials and shall not be used as fill under pavement and/or building areas.
3. Topsoil shall be stored at a location where it does not interfere with construction operations. Excess topsoil shall be used for finish grading on site of drainage swales, yards of new residences, buffer strips, etc.
4. Topsoil shall be reasonably free from subsoil debris and stones.

E. GRADING

1. The Contractor shall perform all grading operations to bring subgrades, after final compaction, to the required grades and sections for site improvement.
2. Subgrade shall be profiled with suitable equipment and all spongy and otherwise unsuitable material shall be removed and replaced with suitable material.
3. Subgrade shall be prepared in compliance with IN D.O.T. standard specifications and as per City of Franklin Subdivision Control and Land Development ordinance.
4. See ROAD CONSTRUCTION
5. All fill material shall be formed from soil free of deleterious material. Prior to placement of fill a sample of the proposed fill material should be submitted to the Sols Engineer for his approval.
6. All fill material in areas outside building and pavement areas shall be compacted lightly and protected from erosion by one or more of the methods of Item G. Areas where building and pavement construction is feasible shall not have unsuitable material placed in that location and fill shall be compacted to 95% Standard Proctor or better. These areas shall be determined by the Developer's representative.

F. EROSION PROTECTION DURING CONSTRUCTION

1. The Contractor shall provide adequate erosion protection measure during construction such as, but not limited to:
 - a. Siltation basins
 - b. Silt traps
 - c. Straw bale dams
 - d. Soil cement
 - e. Mulch and seeding
 - f. Soil stabilization fabric
 - g. Jute netting
2. Details and placement specifications for the above items are available on request from the Engineer.
3. See "Erosion Control Plan" and Details for more erosion control measures.

G. STORM SEWER CONNECTION

1. Storm sewer structures shall comply with current specifications of the City, County and all agencies in respect to design and quality of construction.
2. All storm sewer construction inside public right-of-way, either existing or to be dedicated, shall be in accordance with IN D.O.T. Standard Specifications, 1988 Edition.
3. Where reinforced concrete pipe is shown on the construction plans, it shall be in accordance with A.S.T.M. C-76 Class III Wall "B" unless otherwise specified on the plans. All concrete pipes must have O-Ring joints.
4. Where corrugated metal pipe is shown on the construction plans, it shall be 14 gauge unless otherwise specified and shall have the connecting bands and seals as specified by the manufacturer. C.M.P. may be either aluminum pipe or zinc coated steel sheets in accordance with A.S.T.M. A-444.
5. Manholes, catchbasins and inlets will be poured in place or precast concrete. If the contractor elects to use precast structures, he shall submit shop drawings to the engineer prior to construction.
6. Precast concrete and steel for manholes and inlets shall be in accordance with A.S.T.M. C-478.
7. Castings shall be as shown on the detail sheet(s) for manufacturer, type and model number.

H. UTILITIES

1. Electric and Telephone:
 - a. Conduit shall be required for all crossings under pavement areas.
 - b. Granular backfill shall be required for all crossings under pavement areas.
 - c. Concrete pads for electric and telephone transformers shall be set at the approximate ground grade as shown on the Site Development Grading Plans for the respective locations.
 - d. The Contractor shall be responsible for coordinating with each utility their installation of any lines or conduits or any other equipment required in the project. The utilities shall be notified prior to the placement of pavement a minimum of 48 hours so that they might install any crossings.

I. GRANULAR BACKFILL

Shall be in accordance with IN D.O.T. Standard Specifications. The material shall be Compacted Aggregate No. 53 under or within 5 feet of all pavement per City of Franklin.

J. PAVEMENT CONSTRUCTION

1. All street construction shall be in accordance with the plans and specifications and conform to the minimum standards of IN D.O.T. Standard Specifications, 1988 Edition.
 - a. Concrete shall be 6 bag, Class "A" (minimum 4000 psi after curing, 5% to 7% air entrainment and curing compound required).
 - b. See details for bituminous pavement section.
2. Concrete shall be prepared in compliance with IN D.O.T. standard specifications. No traffic shall be permitted on the prepared subgrade prior to paving.
3. Backfilling of utility trenches with granular material under pavement areas is required and shall be compacted to 95% Standard Proctor. (See Section J).

K. CONCRETE CURB AND WALKS

1. See detail sheet for type and details.
2. Concrete shall be ready mixed Portland cement conforming to A.S.T.M. C-150 and water. Aggregate shall conform to A.S.T.M. C-33. Concrete shall be 6 bag Class "A" with compressive strength of concrete at 28 days being minimum 4000 p.s.i. Where required, reinforcement shall be welded steel wire fabric conforming to A.S.T.M. A-185. 5% to 7% air entrainment and curing compound required.
3. Application
 - a. Place concrete only on a moist, compacted subgrade or base free from loose material. Place no concrete on muddy or frozen subgrade.
 - b. Concrete shall be deposited so as to require as little reworking as practicable. When concrete is to be placed at an atmospheric temperature of 35 degrees F or less, IN D.O.T. Specifications, 1988 Edition shall apply.
 - c. Except as otherwise specified, cure all concrete by one of the methods described in IN D.O.T. Specifications, 1988 Edition.

L. FINISH GRADING AND SEEDING

1. Over the approved rough grade (see Section E), spread 4" minimum of topsoil or approved fill to such depth as will finish to the required finish grades and contours after rolling and natural settlement. New grades shall slope uniformly between levels established on the plans and intersections of new grades with existing grades shall be uniform and smooth.
2. Fertilizer and agricultural limestone shall be spread uniformly over the area to be seeded. They shall be mixed into the top 2" of soil with a disk harrow, rotary tiller or other approved equipment. Fertilizer shall be spread at the rate of 800 pounds per acre and agricultural limestone at the rate of 1/2 ton per acre unless otherwise specified.

SCALE: NA
 DRAWN BY: PY
 CHECKED BY: PY
 CERTIFIED BY: PAUL MAURER
 6/11/14

SEAL: PAUL MAURER
 REGISTERED PROFESSIONAL ENGINEER
 NO. 880006
 STATE OF INDIANA

PROJECT NAME: KID CITY ACADEMY
 1950 NORTH GRAHAM ROAD, FRANKLIN
 PREPARED FOR: FIVEKIDS PROPERTIES & SPECIFICATIONS
 96 LEANING TREE ROAD GREENWOOD, IN 46142

MAURER SURVEYING, INC.
 4800 WEST SMITH VALLEY ROAD, STE. P, GREENWOOD, IN 46142
 OFFICE - 317-861-8588 FAX 317-861-4089
 LAND SURVEYING, LAND DEVELOPMENT & BUILDERS SERVICES

SHEET: C.7
 DATE: JUNE 11, 2014
 JOB NO.: 1750-C.7