

S1 T12N R4E

# HERITAGE SECTION 6

(CONSTRUCTION PLANS)

## JOHNSON COUNTY FRANKLIN, INDIANA

DEVELOPER:

**Arbor Investments, LLC**


6626 E. 75th St., Suite 400

Indianapolis, In 46250

PHONE: (317) 842-1875


FAX: (317) 842-8268

Lantz McElroy, P.E.

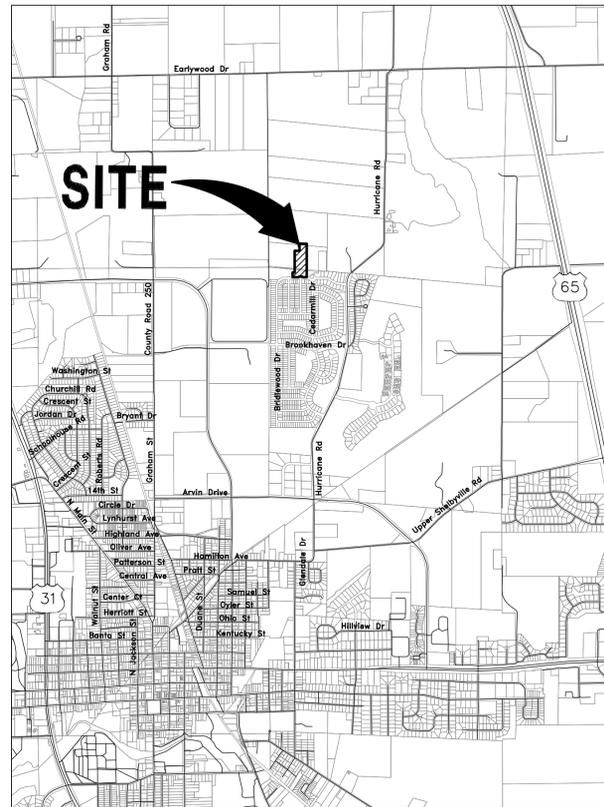

**AREA MAP**

1" = 2000'

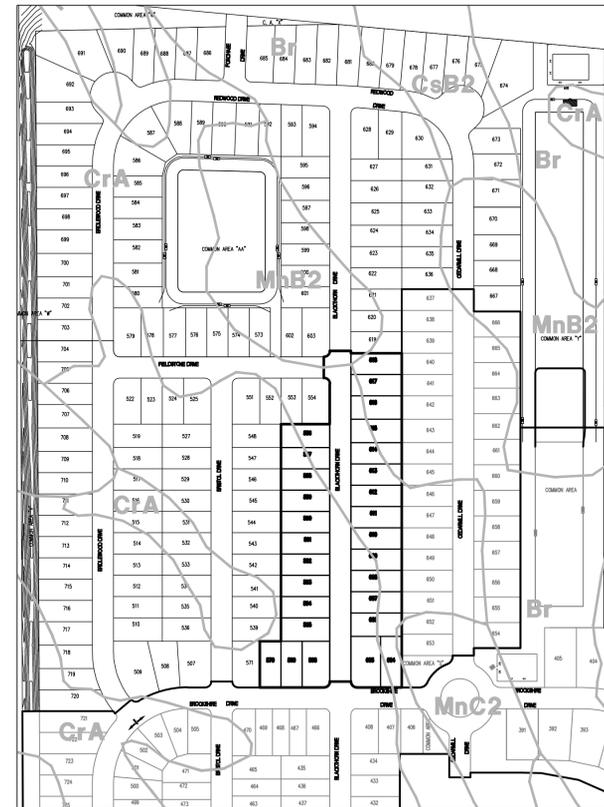

**SOILS MAP**

1" = 200'



**SITE MAP**

SCALE: 1" = 150'



LATITUDE:

' - 3" \$fi& ~B

LONGITUDE:

, \* š\$&f ) ~K


INDEX	
SHEET No.	DESCRIPTION
C100	COVER SHEET
C101	DEVELOPMENT PLAN
C102	UTILITY LATERAL LOCATION PLAN
C103	PRE-CONSTRUCTION STORMWATER POLLUTION PREVENTION PLAN
C104	POST-CONSTRUCTION STORMWATER POLLUTION PREVENTION PLAN
C105	SIGNAGE AND LIGHTING PLAN
C201	STREET PLAN AND PROFILES
C301	INTERSECTION DETAILS
C401	SANITARY SEWER PLAN AND PROFILES
C601	STORM SEWER PLAN AND PROFILES
C701	WATER DISTRIBUTION PLAN
C702	WATER DISTRIBUTION STANDARD DETAILS
C801	STORMWATER POLLUTION PREVENTION SPECIFICATIONS
C802	STORMWATER POLLUTION PREVENTION DETAILS
C803	STREET DETAILS
C804	SANITARY SEWER DETAILS
C805	STORM SEWER DETAILS
C901	SPECIFICATIONS
C902	SPECIFICATIONS



THE SCHNEIDER CORPORATION  
 Historic Fort Harrison  
 8901 Otis Avenue  
 Indianapolis, IN 46216-1037  
 Telephone: 317.826.7100  
 Fax: 317.826.7200  
 www.schneidercorp.com

Civil Engineering  
 GIS + LIS  
 Land Surveying  
 Landscape Architecture

THESE DOCUMENTS ARE SUBJECT TO PERIODIC REVISIONS BY THE SCHNEIDER CORPORATION. THE HOLDER IS RESPONSIBLE FOR VERIFYING THAT THESE DOCUMENTS ARE THE MOST CURRENT PRIOR TO USE.



DATE: 03/19/15

REVISIONS:		
DATE:	BY:	DESCRIPTION:

CERTIFIED BY: TODD C. WALLACE, P.E.

E-MAIL ADDRESS: twallace@schneidercorp.com

PROJECT ENGINEER: GMM


CHECKED BY: TCW DATE CHECKED: 03/18/15

© 2015, The Schneider Corporation

JOB No. 4569.600




FILE NAME: T:\4K\4569\600\DWGS\C100.DWG

SHEET  
**C100**  
 OF  
 19

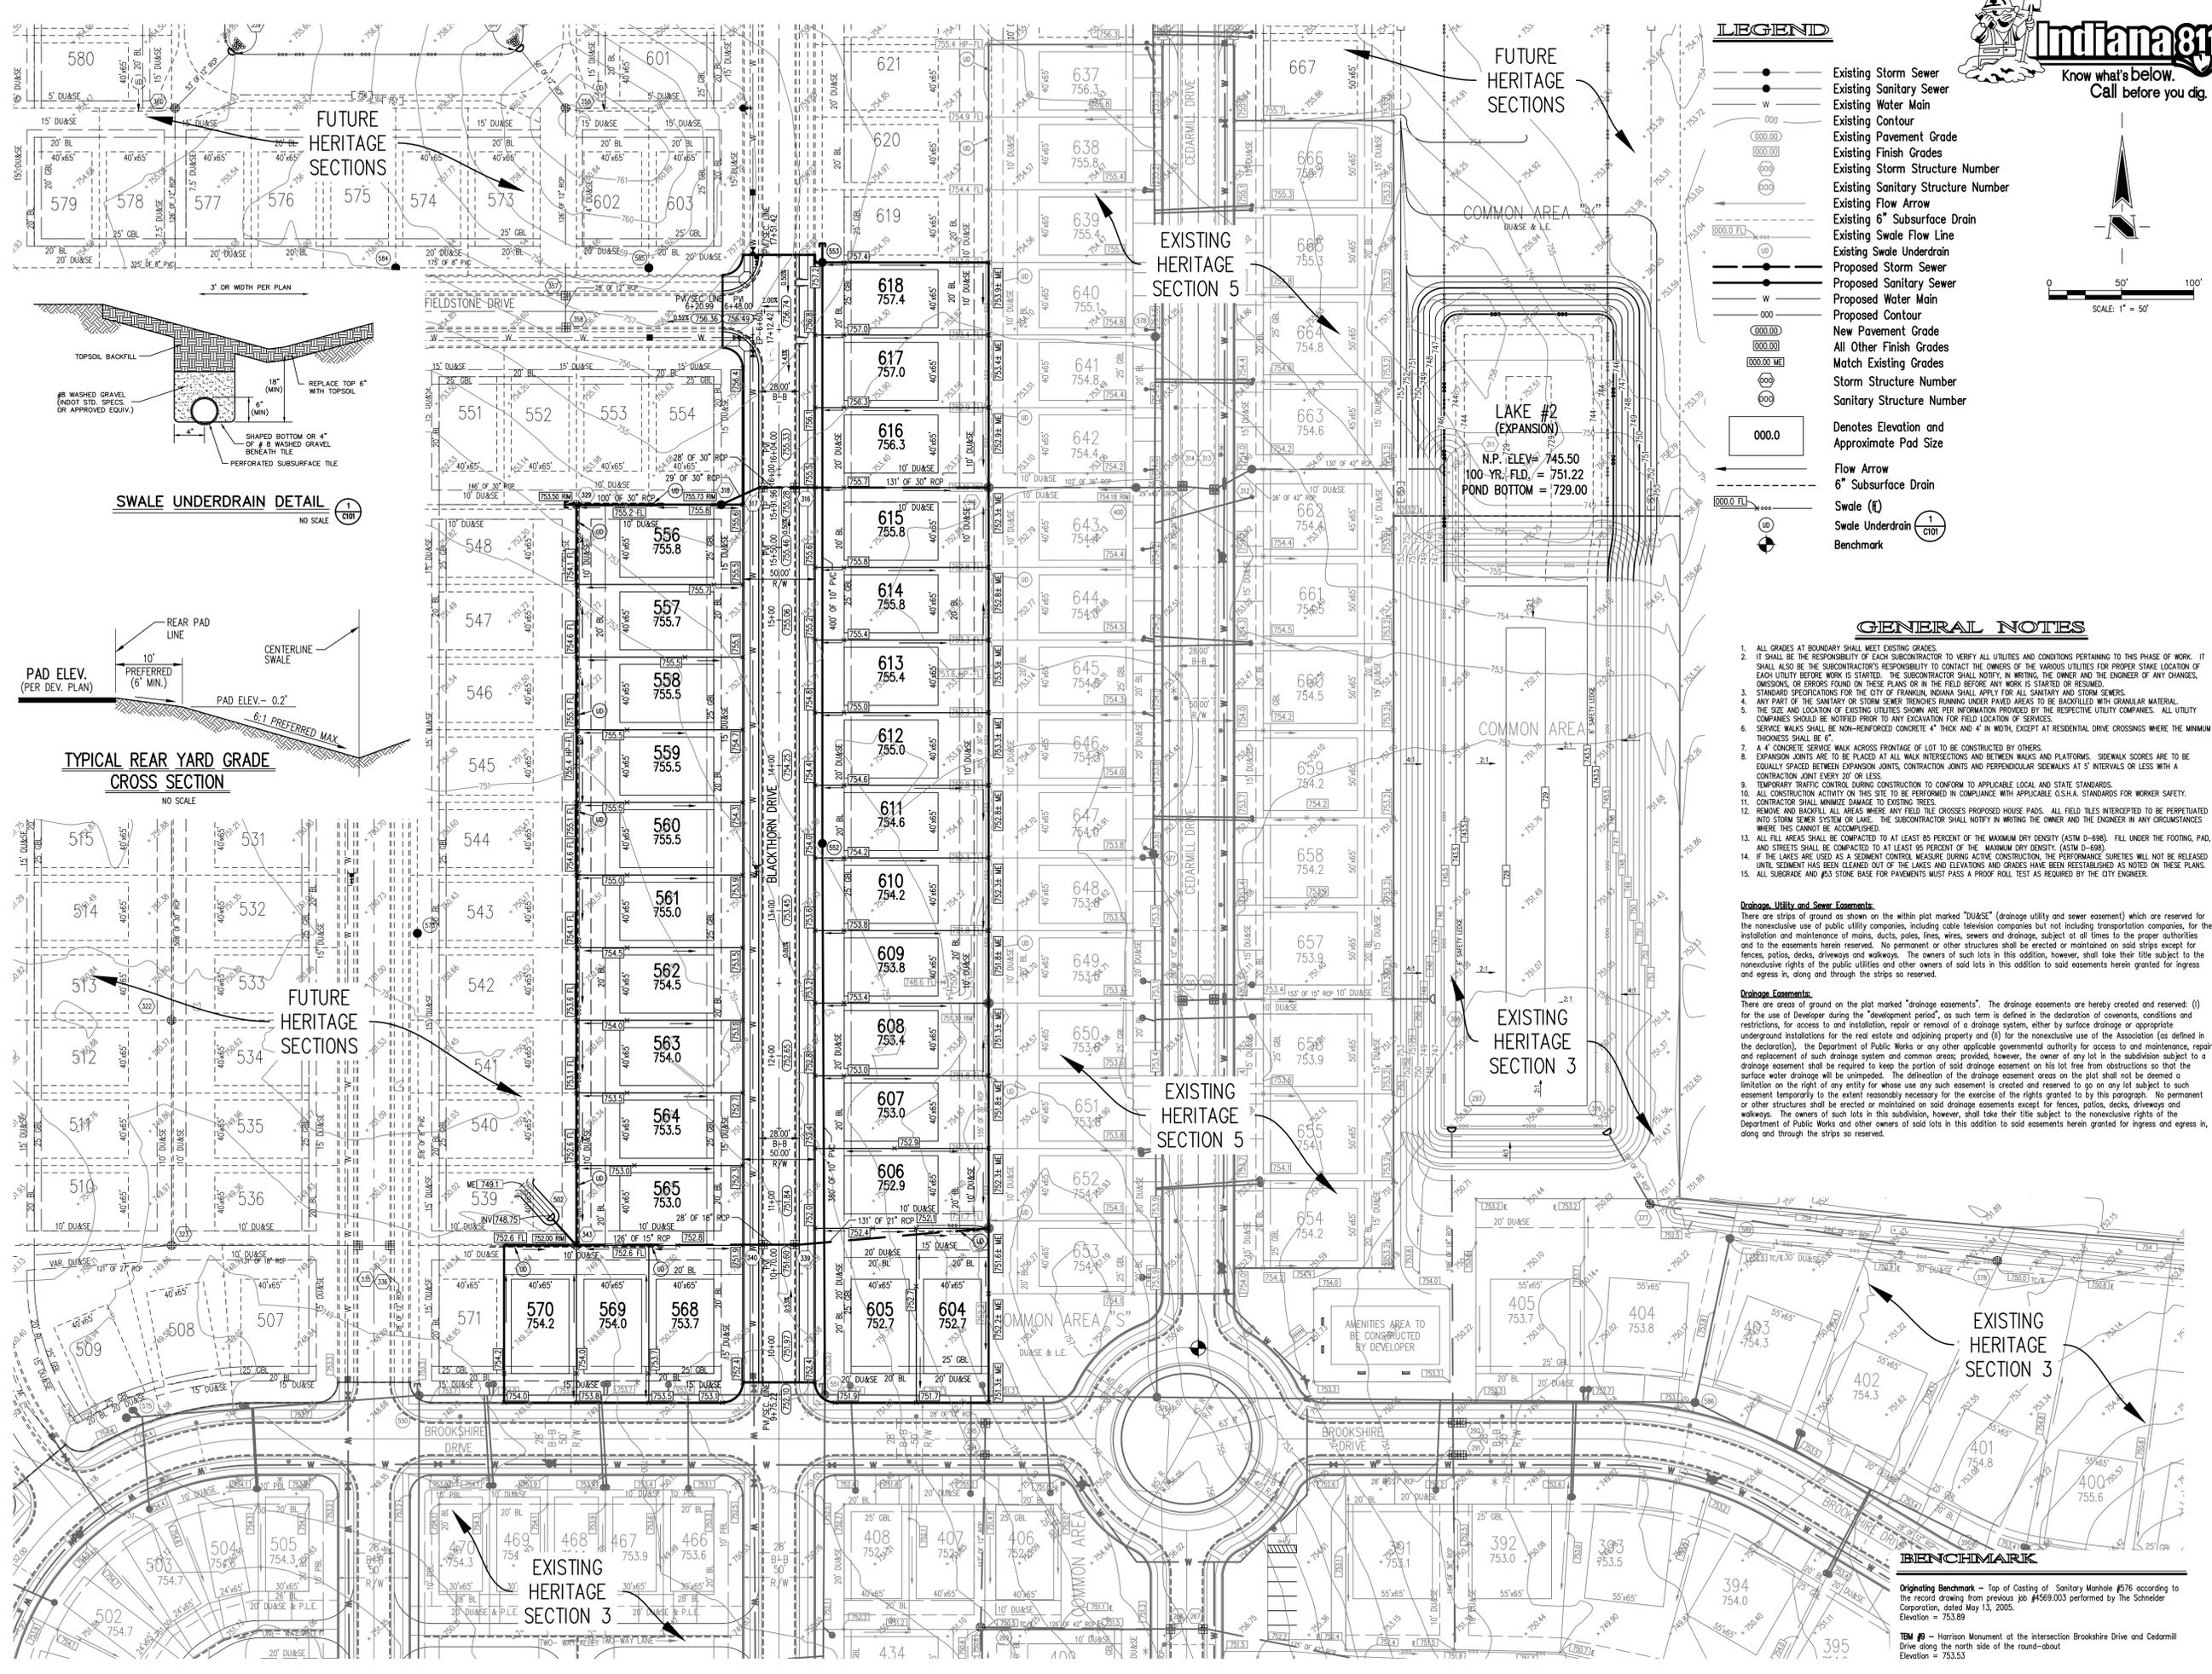

**LEGEND**

- Existing Storm Sewer
- Existing Sanitary Sewer
- Existing Water Main
- Existing Contour
- Existing Pavement Grade
- Existing Finish Grades
- Existing Storm Structure Number
- Existing Sanitary Structure Number
- Existing Flow Arrow
- Existing 6" Subsurface Drain
- Existing Swale Flow Line
- Existing Swale Underdrain
- Proposed Storm Sewer
- Proposed Sanitary Sewer
- Proposed Water Main
- Proposed Contour
- New Pavement Grade
- All Other Finish Grades
- Match Existing Grades
- Storm Structure Number
- Sanitary Structure Number
- 000.0 Denotes Elevation and Approximate Pad Size
- Flow Arrow
- 6" Subsurface Drain
- Swale (1)
- Swale Underdrain (1)
- ⊕ Benchmark

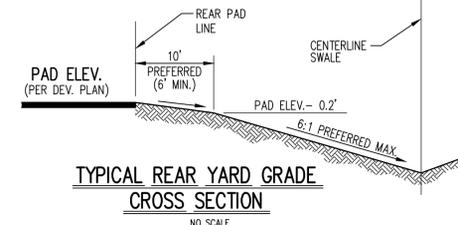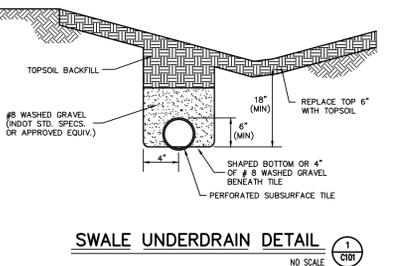

**GENERAL NOTES**

1. ALL GRADES AT BOUNDARY SHALL MEET EXISTING GRADES.
2. IT SHALL BE THE RESPONSIBILITY OF EACH SUBCONTRACTOR TO VERIFY ALL UTILITIES AND CONDITIONS PERTAINING TO THIS PHASE OF WORK. IT SHALL ALSO BE THE SUBCONTRACTOR'S RESPONSIBILITY TO CONTACT THE OWNERS OF THE VARIOUS UTILITIES FOR PROPER STAKE LOCATION OF EACH UTILITY BEFORE WORK IS STARTED. THE SUBCONTRACTOR SHALL NOTIFY, IN WRITING, THE OWNER AND THE ENGINEER OF ANY CHANGES, OMISSIONS, OR ERRORS FOUND ON THESE PLANS OR IN THE FIELD BEFORE ANY WORK IS STARTED OR RESUMED.
3. STANDARD SPECIFICATIONS FOR THE CITY OF FRANKLIN, INDIANA SHALL APPLY FOR ALL SANITARY AND STORM SEWERS.
4. ANY PART OF THE SANITARY OR STORM SEWER TRENCHES RUNNING UNDER PAVED AREAS TO BE BACKFILLED WITH GRANULAR MATERIAL.
5. THE SIZE AND LOCATION OF EXISTING UTILITIES SHOWN ARE PER INFORMATION PROVIDED BY THE RESPECTIVE UTILITY COMPANIES. ALL UTILITY COMPANIES SHOULD BE NOTIFIED PRIOR TO ANY EXCAVATION FOR FIELD LOCATION OF SERVICES.
6. SERVICE WALKS SHALL BE NON-REINFORCED CONCRETE 4" THICK AND 4" IN WIDTH, EXCEPT AT RESIDENTIAL DRIVE CROSSINGS WHERE THE MINIMUM THICKNESS SHALL BE 6".
7. A 4" CONCRETE SERVICE WALK ACROSS FRONTAGE OF LOT TO BE CONSTRUCTED BY OTHERS.
8. EXPANSION JOINTS ARE TO BE PLACED AT ALL WALK INTERSECTIONS AND BETWEEN WALKS AND PLATFORMS. SIDEWALK SCOWS ARE TO BE EQUALLY SPACED BETWEEN EXPANSION JOINTS, CONTRACTION JOINTS AND PERPENDICULAR SIDEWALKS AT 5' INTERVALS OR LESS WITH A CONTRACTION JOINT EVERY 20' OR LESS.
9. TEMPORARY TRAFFIC CONTROL DURING CONSTRUCTION TO CONFORM TO APPLICABLE LOCAL AND STATE STANDARDS.
10. ALL CONSTRUCTION ACTIVITY ON THIS SITE TO BE PERFORMED IN COMPLIANCE WITH APPLICABLE O.S.H.A. STANDARDS FOR WORKER SAFETY.
11. CONTRACTOR SHALL MINIMIZE DAMAGE TO EXISTING TREES.
12. REMOVE AND BACKFILL ALL AREAS WHERE ANY FIELD TREE CROSSES PROPOSED HOUSE PADS. ALL FIELD TREES INTERFERED TO BE PERMITTED INTO STORM SEWER SYSTEM OR LAKE. THE SUBCONTRACTOR SHALL NOTIFY IN WRITING THE OWNER AND THE ENGINEER IN ANY CIRCUMSTANCES WHERE THIS CANNOT BE ACCOMPLISHED.
13. ALL FILL AREAS SHALL BE COMPACTED TO AT LEAST 85 PERCENT OF THE MAXIMUM DRY DENSITY (ASTM D-698). FILL UNDER THE FOOTING, PAD, AND STREETS SHALL BE COMPACTED TO AT LEAST 95 PERCENT OF THE MAXIMUM DRY DENSITY (ASTM D-698).
14. IF THE LAKES ARE USED AS A SEDIMENT CONTROL MEASURE DURING ACTIVE CONSTRUCTION, THE PERFORMANCE SURVEYS WILL NOT BE RELEASED UNTIL SEDIMENT HAS BEEN CLEANED OUT OF THE LAKES AND ELEVATIONS AND GRADES HAVE BEEN REESTABLISHED AS NOTED ON THESE PLANS.
15. ALL SUBGRADE AND #5 STONE BASE FOR PAVEMENTS MUST PASS A PROOF ROLL TEST AS REQUIRED BY THE CITY ENGINEER.

**Drainage Utility and Sewer Easements.**  
These are strips of ground as shown on the within plot marked "DUASE" (drainage utility and sewer easement) which are reserved for the nonexclusive use of public utility companies, including cable television companies but not including transportation companies, for the installation and maintenance of mains, ducts, poles, lines, wires, sewers and drainage, subject at all times to the proper authorities and to the easements herein reserved. No permanent or other structures shall be erected or maintained on said strips except for fences, patios, decks, driveways and walkways. The owners of such lots in this subdivision, however, shall take their title subject to the nonexclusive rights of the public utilities and other owners of said lots in this subdivision to said easements herein granted for ingress and egress in, along and through the strips as reserved.

**Drainage Easements.**  
There are areas of ground on the plot marked "drainage easements". The drainage easements are hereby created and reserved: (i) for the use of Developer during the "development period", as such term is defined in the declaration of covenants, conditions and restrictions, for access to and installation, repair or removal of a drainage system, either by surface drainage or appropriate underground installations for the real estate and adjoining property and (ii) for the nonexclusive use of the Association (as defined in the declaration), the Department of Public Works or any other applicable governmental authority for access to and maintenance, repair and replacement of such drainage system and common areas; provided, however, the owner of any lot in the subdivision subject to a drainage easement shall be required to keep the portion of said drainage easement on his lot free from obstructions so that the surface water drainage will be unimpeded. The delineation of the drainage easement areas on the plot shall not be deemed a limitation on the right of any party for whose use such easement is created and reserved to go on any lot subject to such easement temporarily for the entire responsibility necessary for the exercise of the rights granted by this paragraph. No permanent or other structures shall be erected or maintained on said drainage easements except for fences, patios, decks, driveways and walkways. The owners of such lots in this subdivision, however, shall take their title subject to the nonexclusive rights of the Department of Public Works and other owners of said lots in this subdivision to said easements herein granted for ingress and egress in, along and through the strips as reserved.

REVISIONS:

DATE: 03/19/15

THIS DRAWING AND THE IDEAS, DESIGNS AND CONCEPTS CONTAINED HEREIN ARE THE EXCLUSIVE INTELLECTUAL PROPERTY OF THE SCHNEIDER CORPORATION AND ARE NOT TO BE USED OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE WRITTEN CONSENT OF THE SCHNEIDER CORPORATION.

© COPYRIGHTED BY THE SCHNEIDER CORP. (2015)

**Schneider**

THE SCHNEIDER CORPORATION  
8001 Arrowridge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com

Civil Engineering  
GIS - LIS  
Land Surveying  
Landscape Architecture

**HERITAGE, SECTION 6**

**CITY OF FRANKLIN, JOHNSON COUNTY**

ARBOR INVESTMENTS, LLC  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250


DATE: 03/19/2015 PROJECT NO: 4569.600  
DRAWN BY: BDP CHECKED BY: TCW  
SHEET TITLE: DEVELOPMENT PLAN

DRAWING FILES:  
T:\44\4569\600\dwg\C101.dwg  
REF: T:\44\4569\600\dwg\T104600.dwg  
REF: T:\44\4569\600\dwg\45696000\_BLD.dwg  
REF: T:\44\4569\600\dwg\45696000\_FUTURE.dwg  
REF: T:\44\4569\600\dwg\45696000\_FUTURE.dwg  
REF: T:\44\4569\600\dwg\45696000.dwg  
REF: T:\44\4569\600\dwg\45696000.dwg  
REF: T:\44\4569\600\dwg\45696000.dwg  
REF: T:\44\4569\600\dwg\45696000.dwg

SHEET NO: C101


Plot Date: Mar 19, 2015 Plot Time: 11:15am File Name: T:\44\4569\600\dwg\C101.dwg, Layout: C101 By: bdp

**BENCHMARK**  
Originating Benchmark - Top of Casting of Sanitary Manhole #576 according to the record drawing from previous 03-4569.003 performed by the Schneider Corporation, dated May 13, 2005.  
Elevation = 753.89  
BM # - Harrison Monument at the intersection Brookshire Drive and Cedar Mill Drive along the north side of the round-about  
Elevation = 753.53

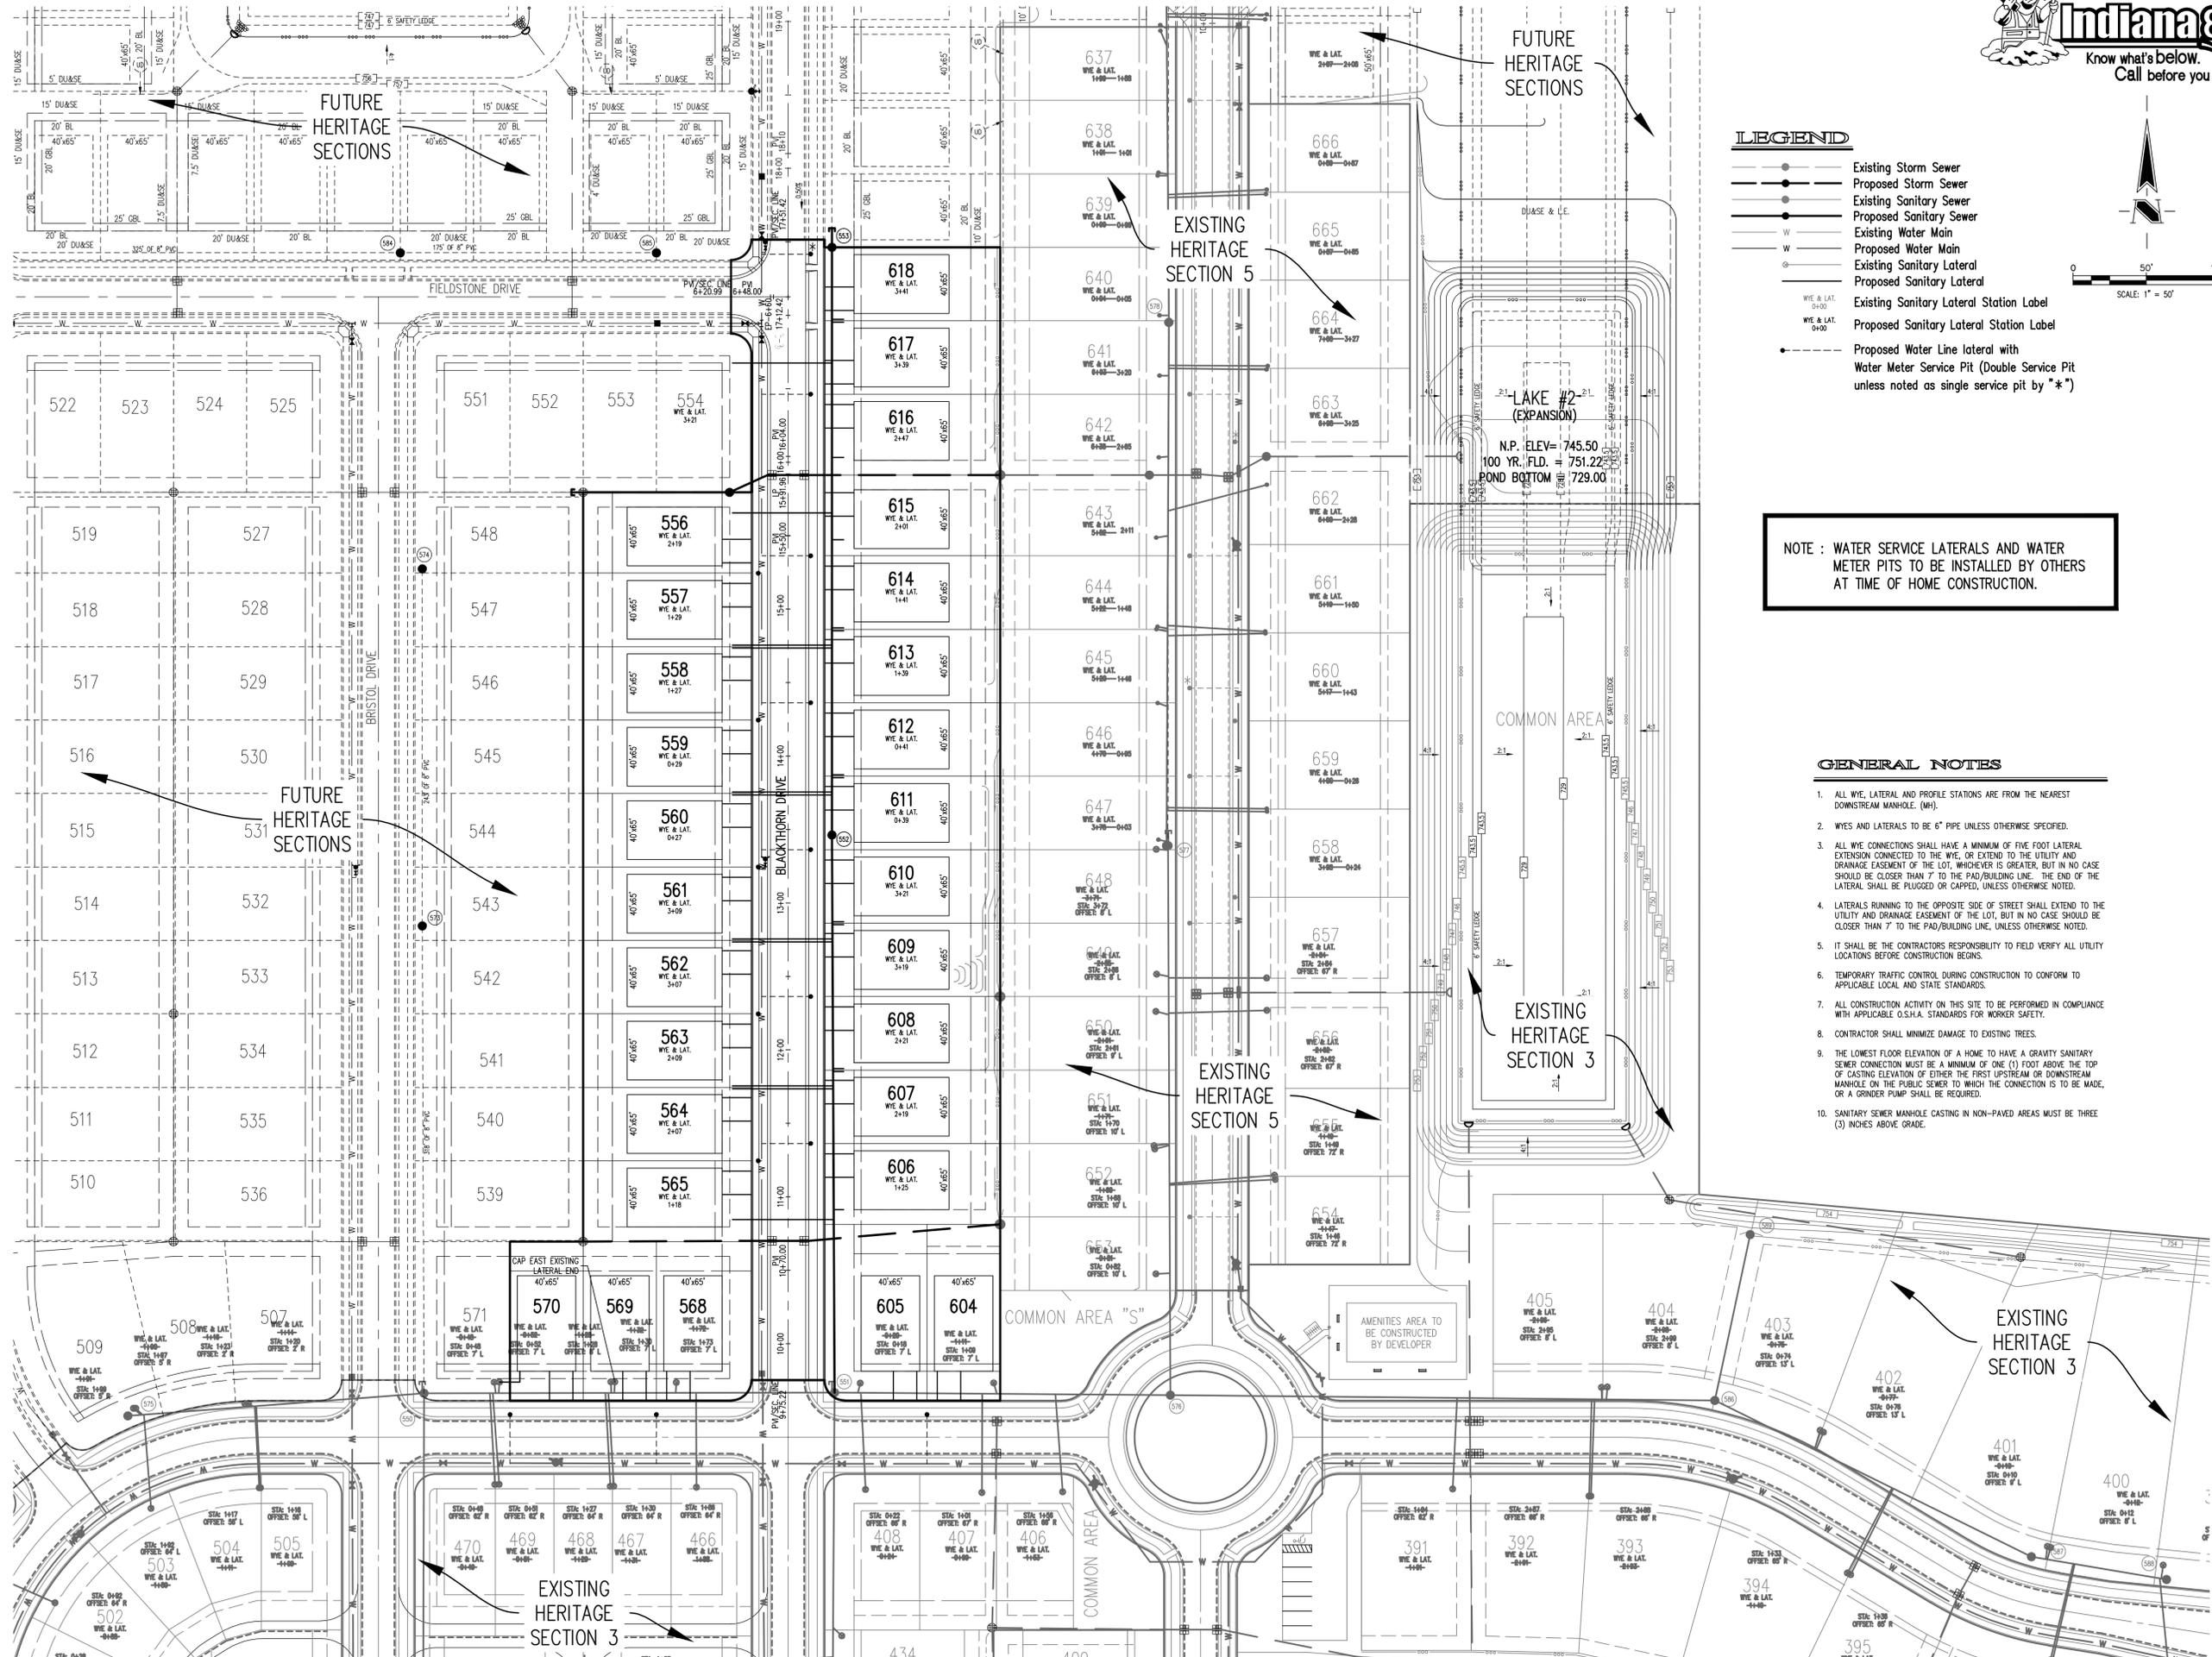

**LEGEND**

- Existing Storm Sewer
- Proposed Storm Sewer
- Existing Sanitary Sewer
- Proposed Sanitary Sewer
- W Existing Water Main
- W Proposed Water Main
- Existing Sanitary Lateral
- Proposed Sanitary Lateral
- Existing Sanitary Lateral Station Label
- Proposed Sanitary Lateral Station Label
- Proposed Water Line lateral with Water Meter Service Pit (Double Service Pit unless noted as single service pit by "\*" )



**NOTE :** WATER SERVICE LATERALS AND WATER METER PITS TO BE INSTALLED BY OTHERS AT TIME OF HOME CONSTRUCTION.

**GENERAL NOTES**

1. ALL WYE, LATERAL AND PROFILE STATIONS ARE FROM THE NEAREST DOWNSTREAM MANHOLE. (MH).
2. WYES AND LATERALS TO BE 6" PIPE UNLESS OTHERWISE SPECIFIED.
3. ALL WYE CONNECTIONS SHALL HAVE A MINIMUM OF FIVE FOOT LATERAL EXTENSION CONNECTED TO THE WYE, OR EXTEND TO THE UTILITY AND DRAINAGE EASEMENT OF THE LOT, WHICHEVER IS GREATER, BUT IN NO CASE SHOULD BE CLOSER THAN 7' TO THE PAD/BUILDING LINE. THE END OF THE LATERAL SHALL BE PLUGGED OR CAPPED, UNLESS OTHERWISE NOTED.
4. LATERALS RUNNING TO THE OPPOSITE SIDE OF STREET SHALL EXTEND TO THE UTILITY AND DRAINAGE EASEMENT OF THE LOT, BUT IN NO CASE SHOULD BE CLOSER THAN 7' TO THE PAD/BUILDING LINE, UNLESS OTHERWISE NOTED.
5. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO FIELD VERIFY ALL UTILITY LOCATIONS BEFORE CONSTRUCTION BEGINS.
6. TEMPORARY TRAFFIC CONTROL DURING CONSTRUCTION TO CONFORM TO APPLICABLE LOCAL AND STATE STANDARDS.
7. ALL CONSTRUCTION ACTIVITY ON THIS SITE TO BE PERFORMED IN COMPLIANCE WITH APPLICABLE O.S.H.A. STANDARDS FOR WORKER SAFETY.
8. CONTRACTOR SHALL MINIMIZE DAMAGE TO EXISTING TREES.
9. THE LOWEST FLOOR ELEVATION OF A HOME TO HAVE A GRAVITY SANITARY SEWER CONNECTION MUST BE A MINIMUM OF ONE (1) FOOT ABOVE THE TOP OF CASTING ELEVATION OF EITHER THE FIRST UPSTREAM OR DOWNSTREAM MANHOLE ON THE PUBLIC SEWER TO WHICH THE CONNECTION IS TO BE MADE, OR A GRINDER PUMP SHALL BE REQUIRED.
10. SANITARY SEWER MANHOLE CASTING IN NON-PAVED AREAS MUST BE THREE (3) INCHES ABOVE GRADE.

REVISIONS:



DATE: 03/19/15  
 THIS DRAWING AND THE IDEAS, DESIGNS AND CONCEPTS CONTAINED HEREIN ARE THE EXCLUSIVE INTELLECTUAL PROPERTY OF THE SCHNEIDER CORPORATION AND ARE NOT TO BE USED OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE WRITTEN CONSENT OF THE SCHNEIDER CORPORATION.  
 © COPYRIGHTED BY THE SCHNEIDER CORP. (2015)

**Schneider**

THE SCHNEIDER CORPORATION  
 8001 Arrowridge Boulevard  
 Charlotte, NC 28273  
 Telephone: 704.697.5900  
 Fax: 704.697.5990  
 www.schneidercorp.com

Civil Engineering  
 GIS + LIS  
 Land Surveying  
 Landscape Architecture

**HERITAGE, SECTION 6**  
 CITY OF FRANKLIN, JOHNSON COUNTY  
 ARBOR INVESTMENTS, LLC  
 6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015 PROJECT NO: 4569.600  
 DRAWN BY: BDP CHECKED BY: TCW  
 SHEET TITLE: UTILITY LATERAL LOCATION PLAN  
 DRAWING FILES:  
 T:\44\4569\600\dwg\C102.dwg  
 T:\44\4569\600\dwg\T10600.dwg  
 T:\44\4569\600\dwg\4569000\_BES.dwg  
 T:\44\4569\600\dwg\4569000\_FUTURE.dwg  
 T:\44\4569\600\dwg\4569000\_FUTURE.dwg  
 T:\44\4569\600\dwg\4569000.dwg  
 T:\44\4569\600\dwg\4569000.dwg  
 T:\44\4569\600\dwg\4569000.dwg  
 SHEET NO: **C102**


Plot Date: Mar 19, 2015 Plot Time: 11:17am File Name: T:\44\4569\600\dwg\C102.dwg, Layout: C102 By: bdp





**LEGEND**

- Existing Storm Sewer
- New Storm Sewer
- Existing Sanitary Sewer
- New Sanitary Sewer
- Existing Contour
- Existing Elevation



[Hatch pattern]	HATCH PATTERN DENOTES TEMPORARY SEEDING
[Hatch pattern]	HATCH PATTERN DENOTES PERMANENT SEEDING
[Hatch pattern]	HATCH PATTERN DENOTES TEMPORARY CONSTRUCTION ENTRANCE
[Symbol]	CURB INLET PROTECTION
[Symbol]	BEEHIVE INLET PROTECTION
[Symbol]	SILTATION FENCE
[Symbol]	CONSTRUCTION LIMITS
[Hatch pattern]	HATCH PATTERN DENOTES EROSION CONTROL BLANKET
[Symbol]	SWALE PROTECTION (EROSION BLANKET)

**STORMWATER POLLUTION PREVENTION GENERAL NOTES**

1. EARTH MOVING MAY NOT COMMENCE UNTIL ITEMS 1-9 OF "PRECONSTRUCTION ACTIVITIES" (P3) ON C801 HAVE BEEN COMPLETED IN ADDITION TO ITEMS DEPICTED ON PLAN.
2. RULE 5 REQUIRES ALL DISTURBED AREAS THAT WILL POTENTIALLY BE IDLE FOR 15 DAYS OR MORE TO BE STABILIZED (SEEDED, MULCHED, ETC.) IMMEDIATELY.
3. ADDITIONAL STORMWATER POLLUTION PREVENTION MEASURES MAY BE REQUIRED IN THE FIELD BY THE CITY OF FRANKLIN ENGINEER AS CONDITIONS WARRANT.
4. ALL EROSION CONTROL MATERIALS MUST BE APPROVED BY THE CITY OF FRANKLIN INSPECTOR PRIOR TO INSTALLATION.
5. THERE SHALL BE NO DIRT, DEBRIS OR STORAGE OF MATERIALS IN THE STREETS.
6. APPROXIMATE CONSTRUCTION SCHEDULE:  
START DATE: May 1, 2015  
COMPLETION DATE: April 30, 2020
7. RECEIVING WATER = Hurricane Creek

**BENCHMARK**


Originating Benchmark - Top of Casting of Sanitary Manhole #576 according to the record drawing from previous job #4569.003 performed by the Schneider Corporation, dated May 13, 2005.  
Elevation = 753.59

TBM #9 - Harrison Monument at the intersection Brookshire Drive and Cedarhill Drive along the north side of the round-about  
Elevation = 753.53

10. WARNING: THIS SHEET TO BE USED FOR STORMWATER POLLUTION PREVENTION PURPOSES ONLY. FOR ANY OTHER INFORMATION SEE SHEET C101.
11. SEE SHEETS C801-C802 FOR ALL STORMWATER POLLUTION PREVENTION PLAN DETAILS & NOTES.
12. ALL EROSION CONTROL PRACTICES SHALL BE IN ACCORDANCE WITH IDEM - INDIANA STORM WATER QUALITY MANUAL AND THE SCS "FIELD OFFICE TECHNICAL GUIDE".
13. ALL CONSTRUCTION ACTIVITY ON THIS SITE TO BE PERFORMED IN COMPLIANCE WITH APPLICABLE O.S.H.A. STANDARDS FOR WORKER SAFETY.
14. EXISTING EROSION CONTROL MEASURES: ANY PART DAMAGED, DESTROYED OR DISTURBED DURING CONSTRUCTION IS TO BE REPLACED IMMEDIATELY.
15. ALL CASTINGS SHALL HAVE STANDARD "ENVIRONMENTALLY FRIENDLY LOGOS" EMBOSSED INTO THE INLET.

NOTE: PRIOR TO THE ISSUANCE OF ANY BUILDING PERMITS THE BITUMINOUS BASE AND BINDER LAYERS FOR ALL STREETS, DRIVES AND PARKING LOTS TO BE INSTALLED AND ALL WATER MAINS AND HYDRANTS FOR THE SITE DEVELOPMENT MUST BE INSTALLED PER APPROVED SPECIFICATIONS AND MADE SERVICEABLE.  
Revised 12-04

NOTE: EXISTING TOPOGRAPHY BASED UPON SURVEY DATA COLLECTED 04/15/03. CONTRACTOR SHALL VERIFY LOCATION OF EXISTING DIVERSION SWALE PRIOR TO CONSTRUCTION.

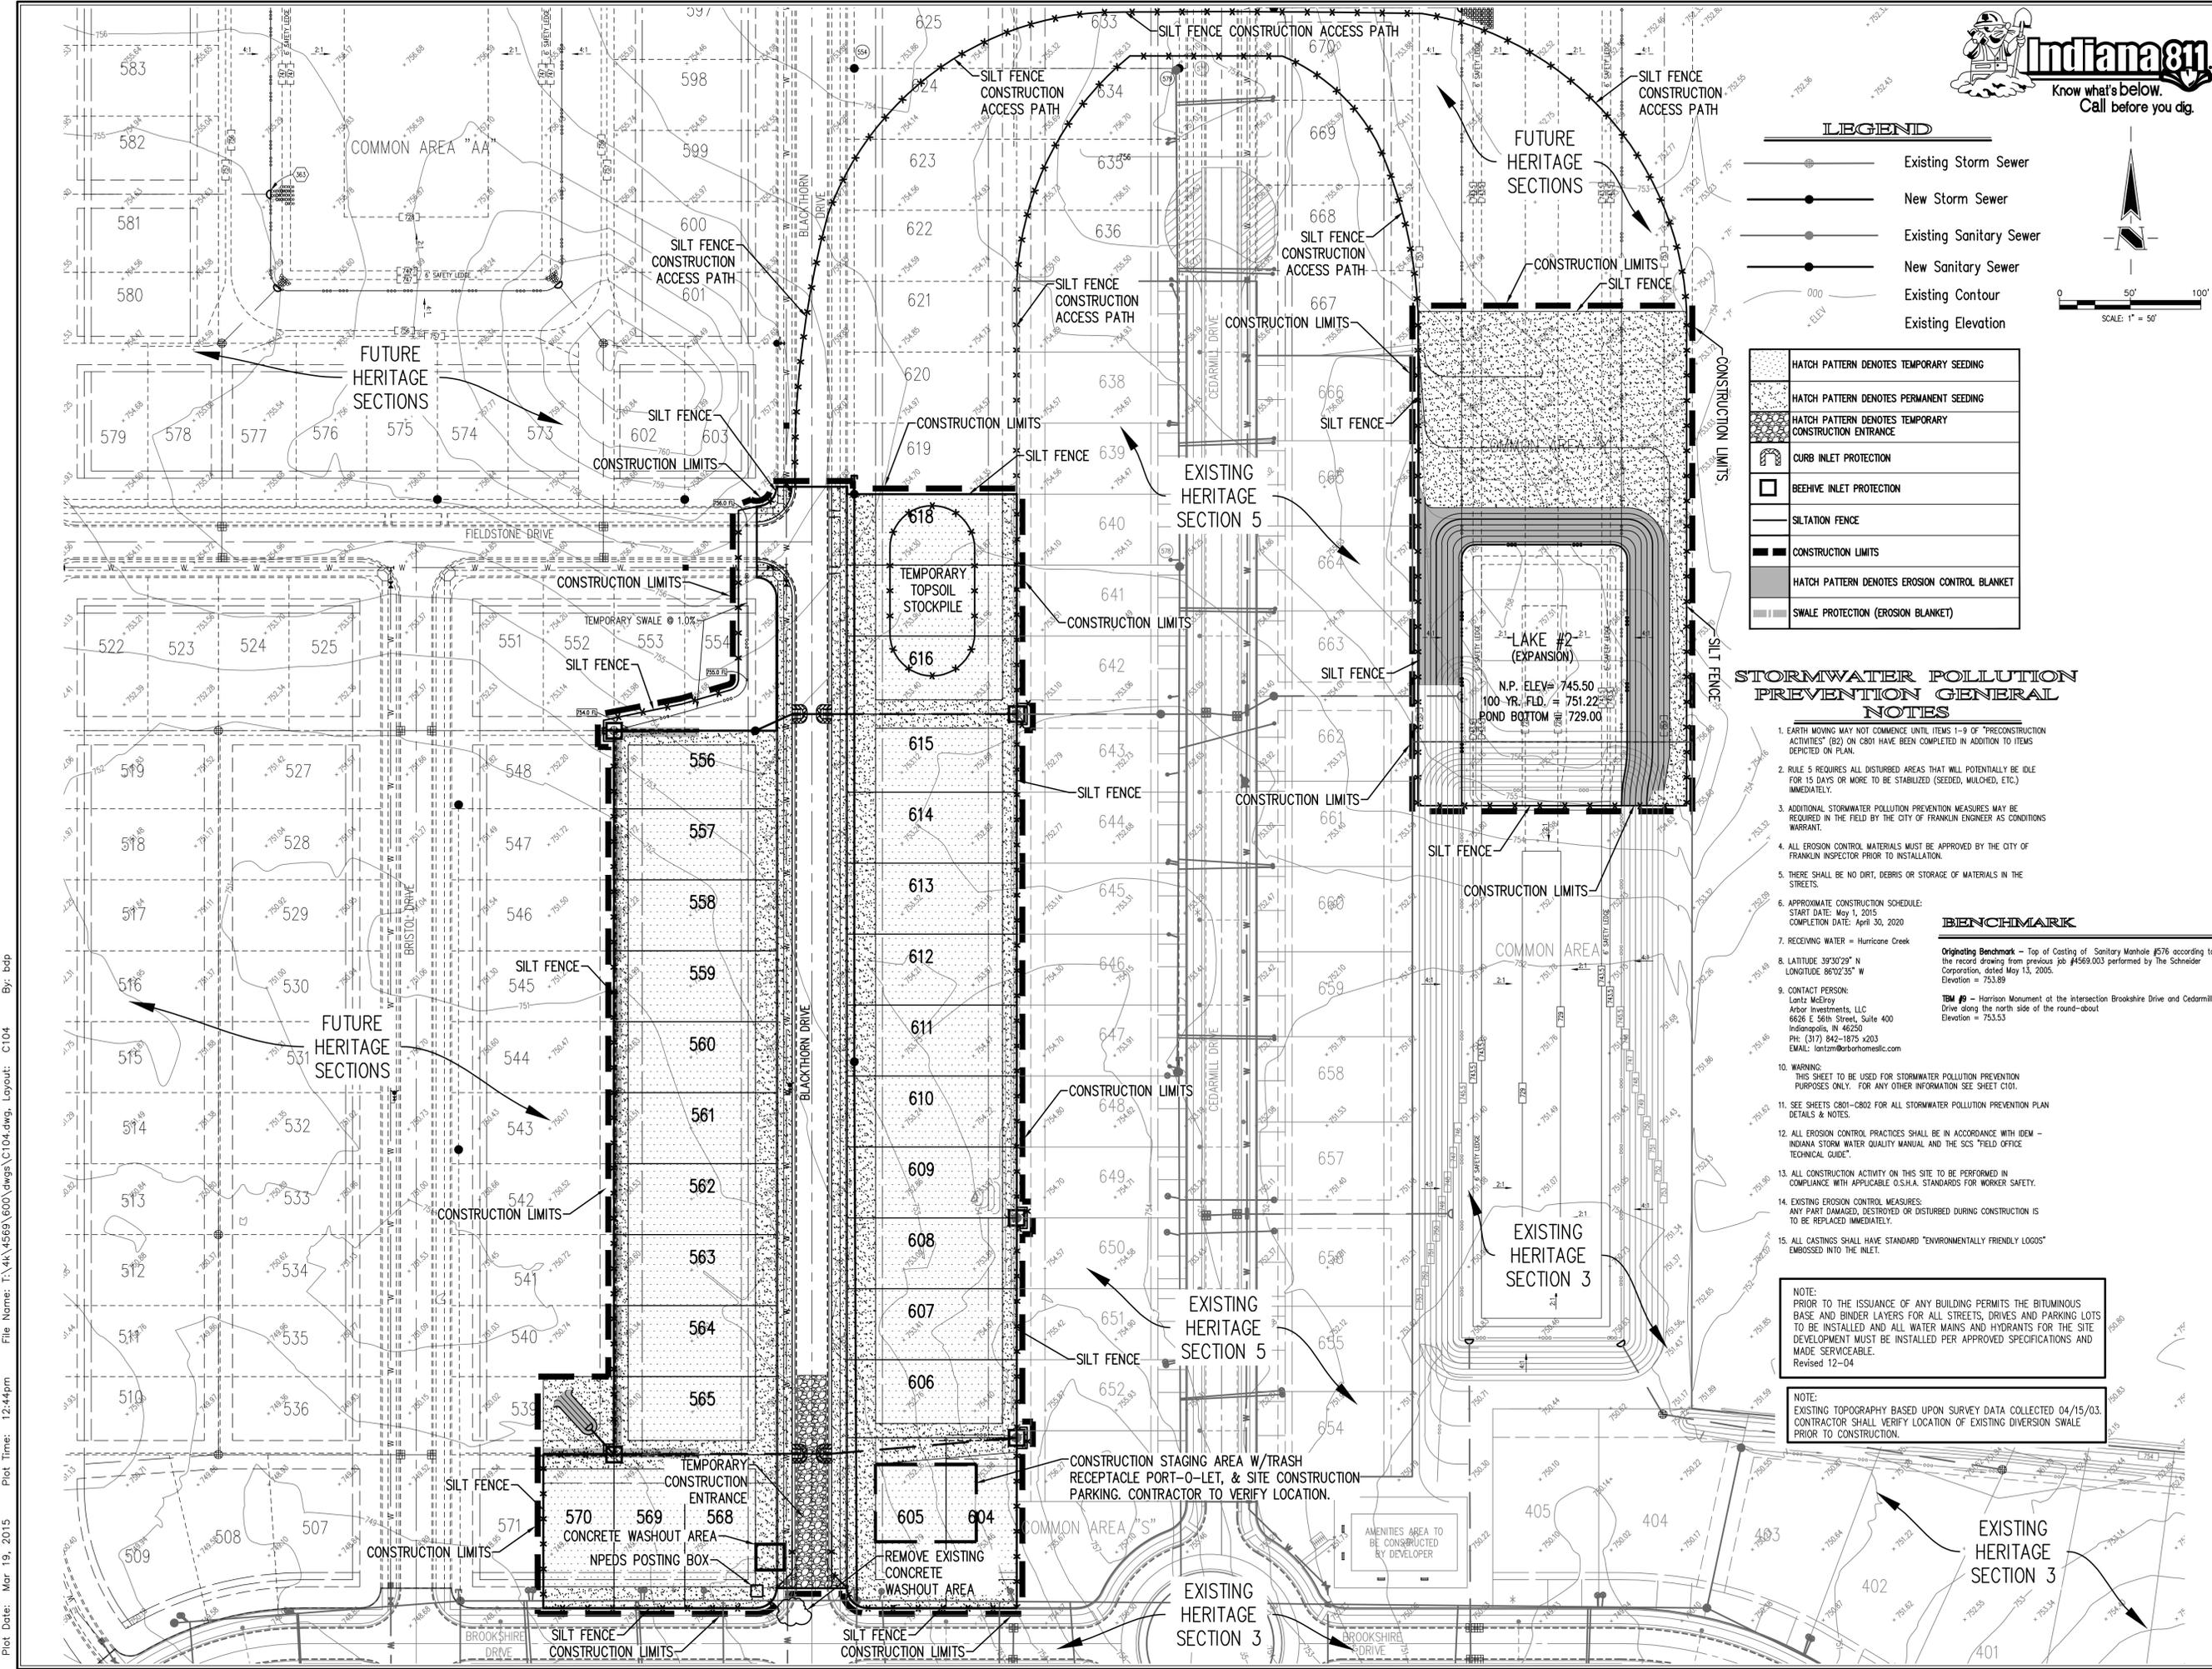

REVISIONS:

DATE: 03/19/15

THIS DRAWING AND THE IDEAS, DESIGNS AND CONCEPTS CONTAINED HEREIN ARE THE EXCLUSIVE INTELLECTUAL PROPERTY OF THE SCHNEIDER CORPORATION AND ARE NOT TO BE USED OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE WRITTEN CONSENT OF THE SCHNEIDER CORPORATION.

© COPYRIGHTED BY THE SCHNEIDER CORP. (2015)

THE SCHNEIDER CORPORATION  
8001 Arrowridge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com

Civil Engineering  
GIS = LIS  
Land Surveying  
Landscape Architecture


**HERITAGE, SECTION 6**

**CITY OF FRANKLIN, JOHNSON COUNTY**

**ARBOR INVESTMENTS, LLC**  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015	PROJECT NO: 4569.600
DRAWN BY: BDP	CHECKED BY: TCW
SHEET TITLE: POST-CONSTRUCTION STORMWATER POLLUTION PREVENTION PLAN	
DRAWING FILES: T:\44\4569\600\dwg\C104.dwg XREF: T:\44\4569\600\dwg\T104600.dwg XREF: T:\44\4569\600\dwg\4569600_BSS.dwg XREF: T:\44\4569\600\dwg\4569600_FUTURE5.dwg XREF: T:\44\4569\600\dwg\4569600_FUTURE5.dwg XREF: T:\44\4569\600\dwg\4569600_BSS.dwg XREF: T:\44\4569\600\dwg\4569600.dwg XREF: T:\44\4569\600\dwg\4569600.dwg XREF: T:\44\4569\600\dwg\4569600.dwg XREF: T:\44\4569\600\dwg\4569600.dwg XREF: T:\44\4569\600\dwg\4569600.dwg XREF: T:\44\4569\600\dwg\4569600.dwg	
SHEET NO: C104	


Plot Date: Mar 19, 2015  
Plot Time: 12:44pm  
File Name: T:\44\4569\600\dwg\C104.dwg, Layout: C104  
By: bdp



**LEGEND**

- (2 REQ.)  TYPE III CONSTRUCTION BARRICADES
- (0 REQ.)  POND SAFETY SIGN  
NO SWIMMING
- (2 REQ.)  STOP (R1-1)
- (2 REQ.)  SPEED LIMIT (25 MPH) (R2-1 t)
- (1 REQ.)  STREET NAME SIGN
- (1 REQ.)  STREET LIGHT
-  STOP BAR

REVISIONS:




**Schneider**

THE SCHNEIDER CORPORATION  
8001 Arrowridge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com


Civil Engineering  
GIS \* LIS  
Land Surveying  
Landscape Architecture

**HERITAGE, SECTION 6**

**CITY OF FRANKLIN, JOHNSON COUNTY**

**ARBOR INVESTMENTS, LLC**  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015 PROJECT NO: 4569.600  
DRAWN BY: BDP CHECKED BY: TCW  
SHEET TITLE: SIGNAGE AND LIGHTING PLAN  
DRAWING FILES:  
T:\44\4569\600\dwg\C105.dwg  
XREF: T:\44\4569\600\dwg\1104600.dwg  
XREF: T:\44\4569\600\dwg\4569600\_BIS.dwg  
XREF: T:\44\4569\600\dwg\4569600\_FUTURE.dwg  
XREF: T:\44\4569\600\dwg\4569600\_SIGN.dwg  
XREF: T:\44\4569\600\dwg\4569600\_SBS.dwg  
XREF: T:\44\4569\600\dwg\4569600\_SLS.dwg  
XREF: T:\44\4569\600\dwg\4569600\_SLS.dwg  
SHEET NO: C105

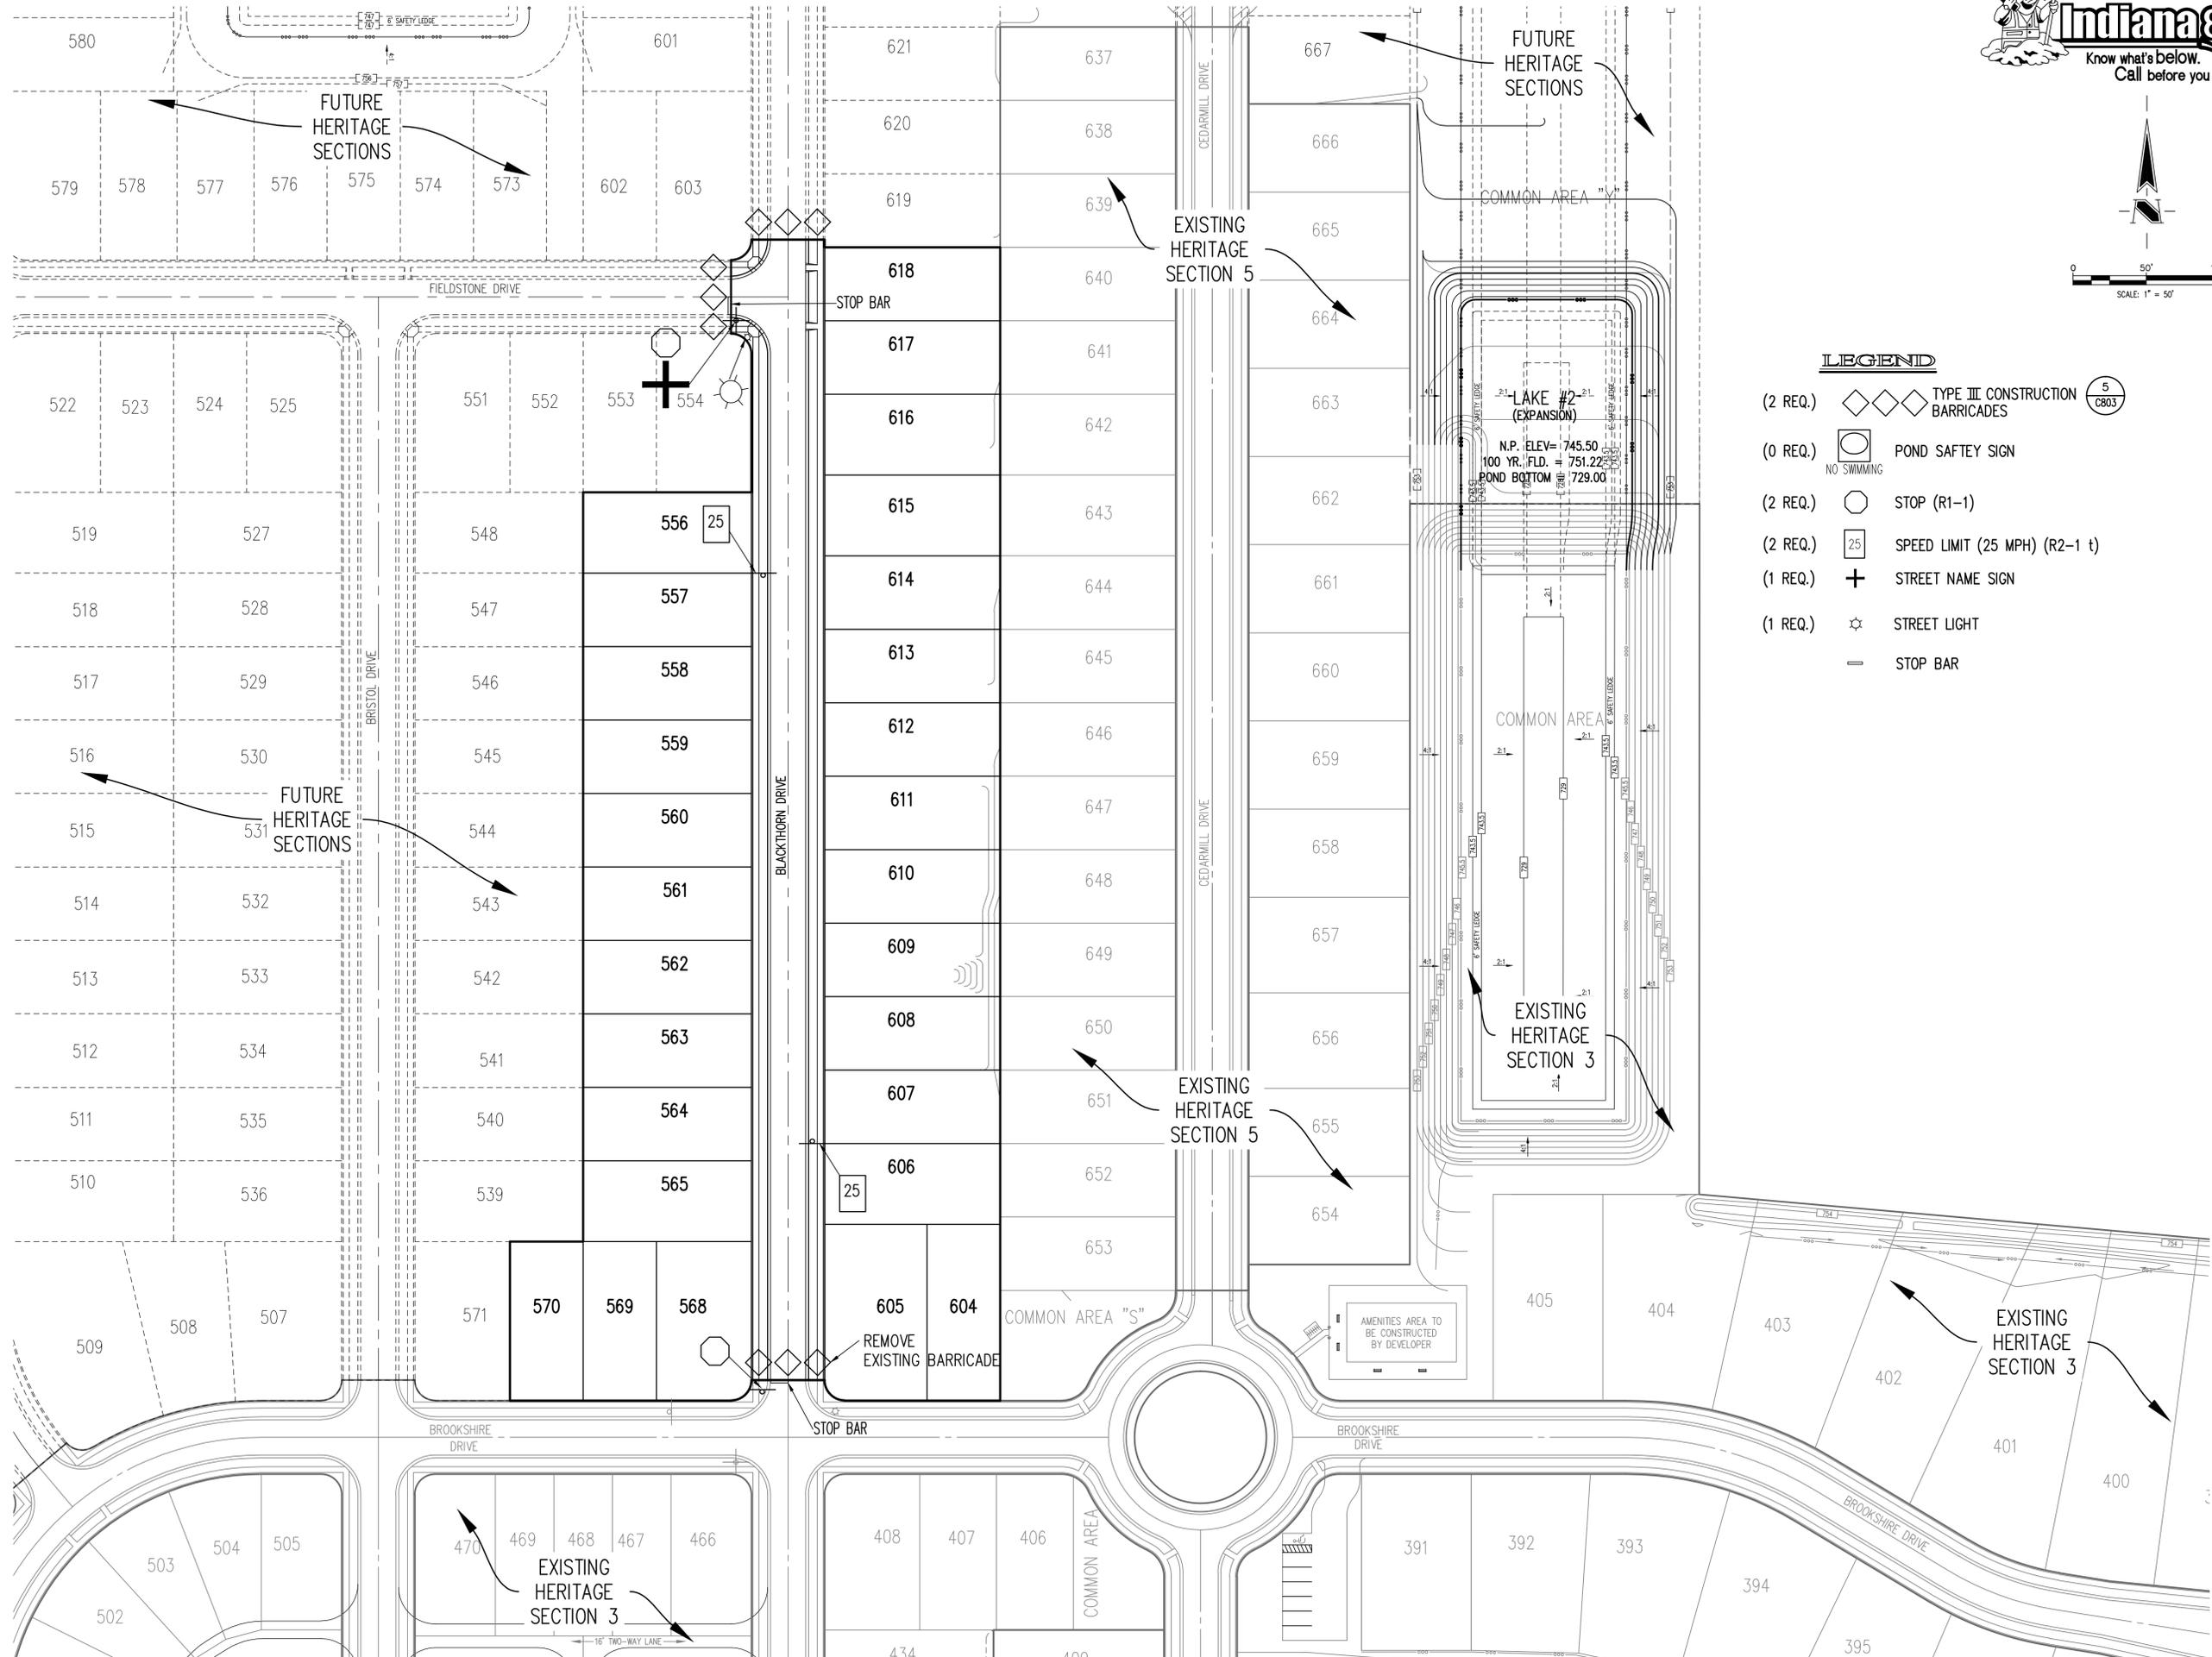

Plot Date: Mar 19, 2015 Plot Time: 11:28am File Name: T:\44\4569\600\dwg\C105.dwg, Layout: C105 By: bdp



**GENERAL NOTES**

1. TEMPORARY TRAFFIC CONTROL DURING CONSTRUCTION TO CONFORM TO APPLICABLE LOCAL AND STATE STANDARDS.
2. ALL CONSTRUCTION ACTIVITY ON THIS SITE TO BE PERFORMED IN COMPLIANCE WITH APPLICABLE O.S.H.A. STANDARDS FOR WORKER SAFETY.
3. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO FIELD VERIFY ALL UTILITY LOCATIONS BEFORE CONSTRUCTION BEGINS.
4. CONTRACTORS SHALL MINIMIZE DAMAGE TO EXISTING TREES.


**BENCHMARK**

**Originating Benchmark** - Top of Casting of Sanitary Manhole #576 according to the record drawing from previous job #4569.003 performed by The Schneider Corporation, dated May 13, 2005.  
Elevation = 753.69


**TBM #9** - Harrison Monument at the Intersection Brookshire Drive and Cedarmill Drive along the north side of the round-about  
Elevation = 753.53

Sheet	Detail Number	Description
C803	3	Street Cross Section Detail
C803	1	Concrete Sidewalk Detail
C803	5	Sidewalk Ramp For Handicapped Detail
C803	4	Curb Details
C803	6	Curb Underdrain Detail

**NOTE** All Streets to be 28' in width unless otherwise noted.  
All Rights-of-way to be 50' in width unless otherwise noted.  
All Pavement Depths of Roadway are Specified on Detail sheet C801, Detail 3.

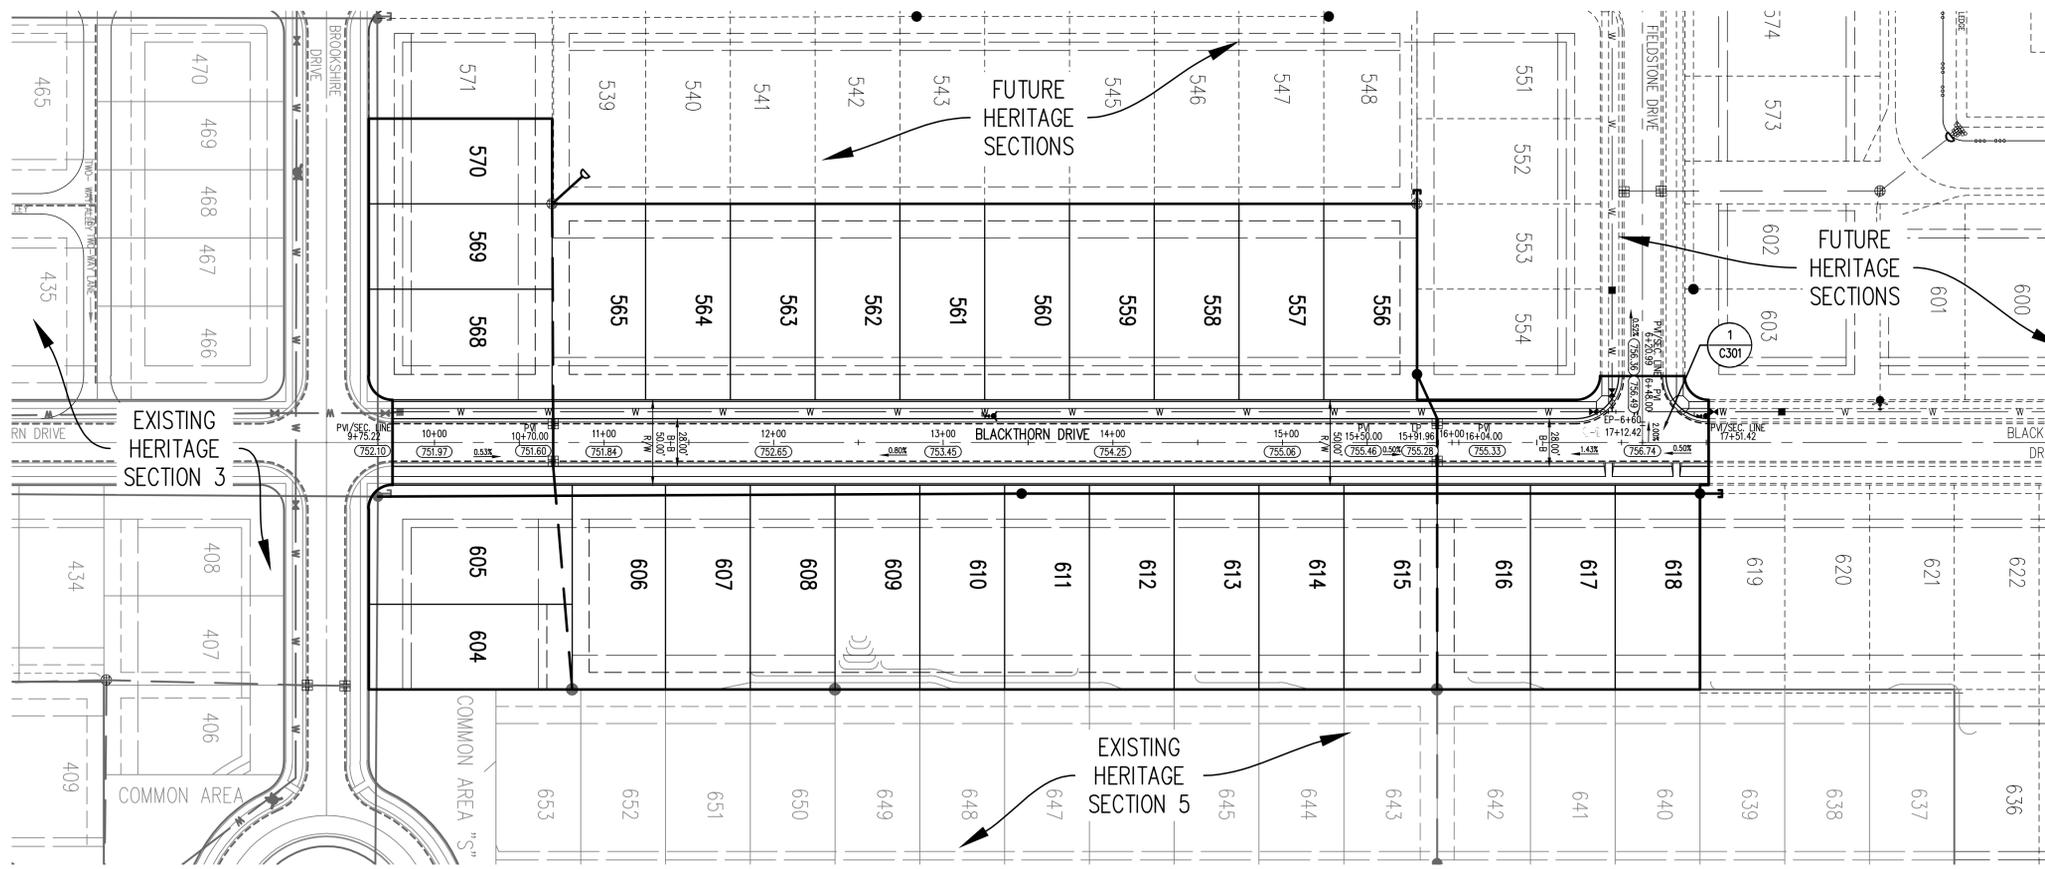

**STREET PLAN**

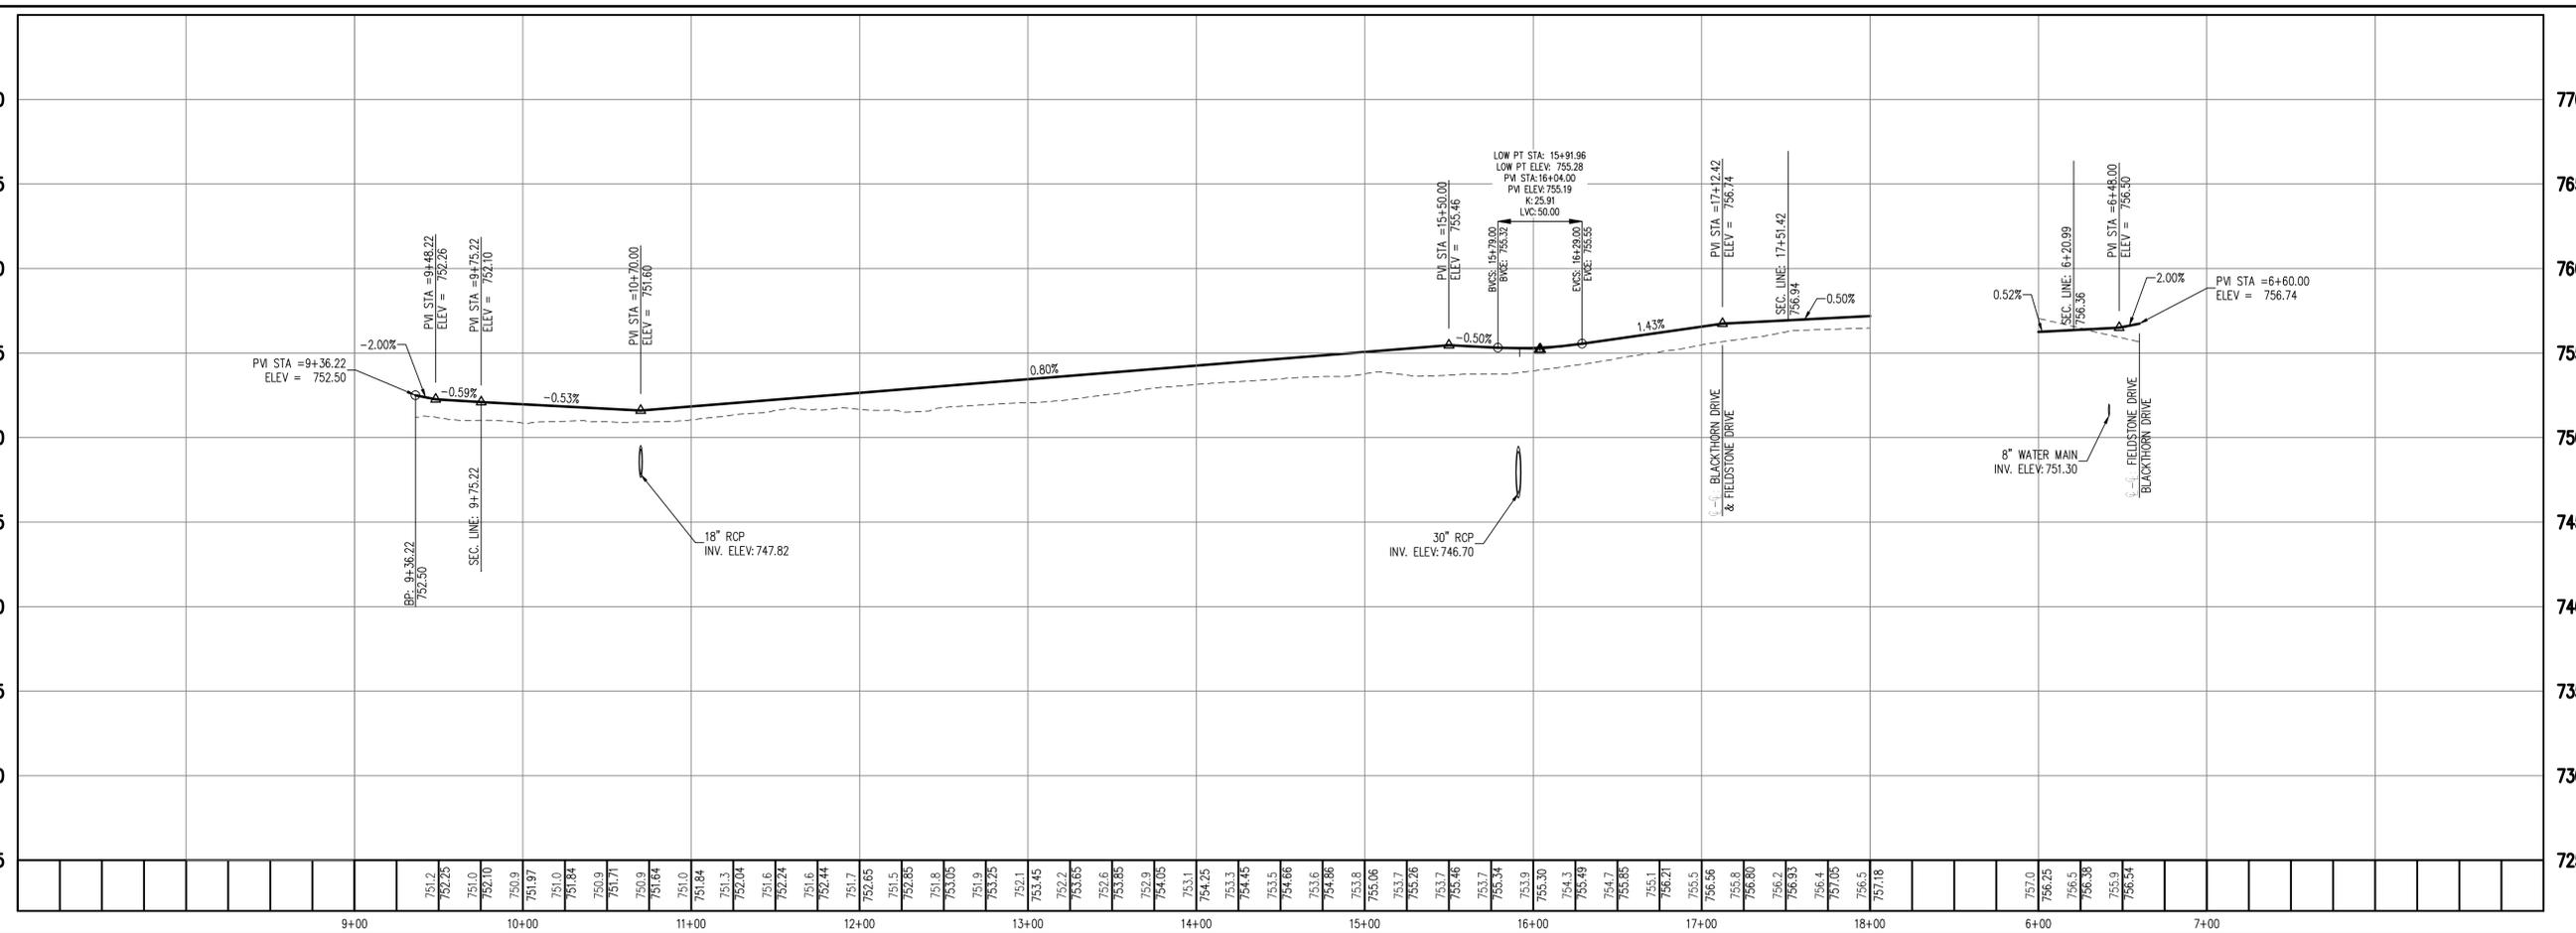

**STREET PROFILE**

**LEGEND**

	Existing Grade
	New Grade

SCALE:  $\frac{\text{HORZ.: } 1"=50'}{\text{VERT.: } 1"=5'}$

REVISIONS:



DATE: 03/19/15

THIS DRAWING AND THE IDEAS, DESIGNS AND CONCEPTS CONTAINED HEREIN ARE THE EXCLUSIVE INTELLECTUAL PROPERTY OF THE SCHNEIDER CORPORATION AND ARE NOT TO BE USED OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE WRITTEN CONSENT OF THE SCHNEIDER CORPORATION.

© COPYRIGHTED BY THE SCHNEIDER CORP. (2015)



THE SCHNEIDER CORPORATION  
8001 Arrowidge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com

Civil Engineering  
GIS = LIS  
Land Surveying  
Landscape Architecture



**HERITAGE, SECTION 6**

**CITY OF FRANKLIN, JOHNSON COUNTY**

**ARBOR INVESTMENTS, LLC**  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015	PROJECT NO.: 4569.600
DRAWN BY: BDP	CHECKED BY: TCW
SHEET TITLE: STREET PLAN AND PROFILES	
DRAWING FILES: I:\44\4569\600\dwg\C201.dwg XREF: I:\44\4569\600\dwg\T06600.dwg XREF: I:\44\4569\600\dwg\4569600_BIS.dwg XREF: I:\44\4569\600\dwg\4569600_FUTURE.dwg XREF: I:\44\4569\600\dwg\4569600_FUTURE.dwg XREF: I:\44\4569\600\dwg\4569600.dwg XREF: I:\44\4569\600\dwg\4569600.dwg	
SHEET NO.: C201	

Plot Date: Mar 19, 2015 Plot Time: 11:28am File Name: T:\44\4569\600\dwg\C201.dwg, Layout: C201 By: bdp

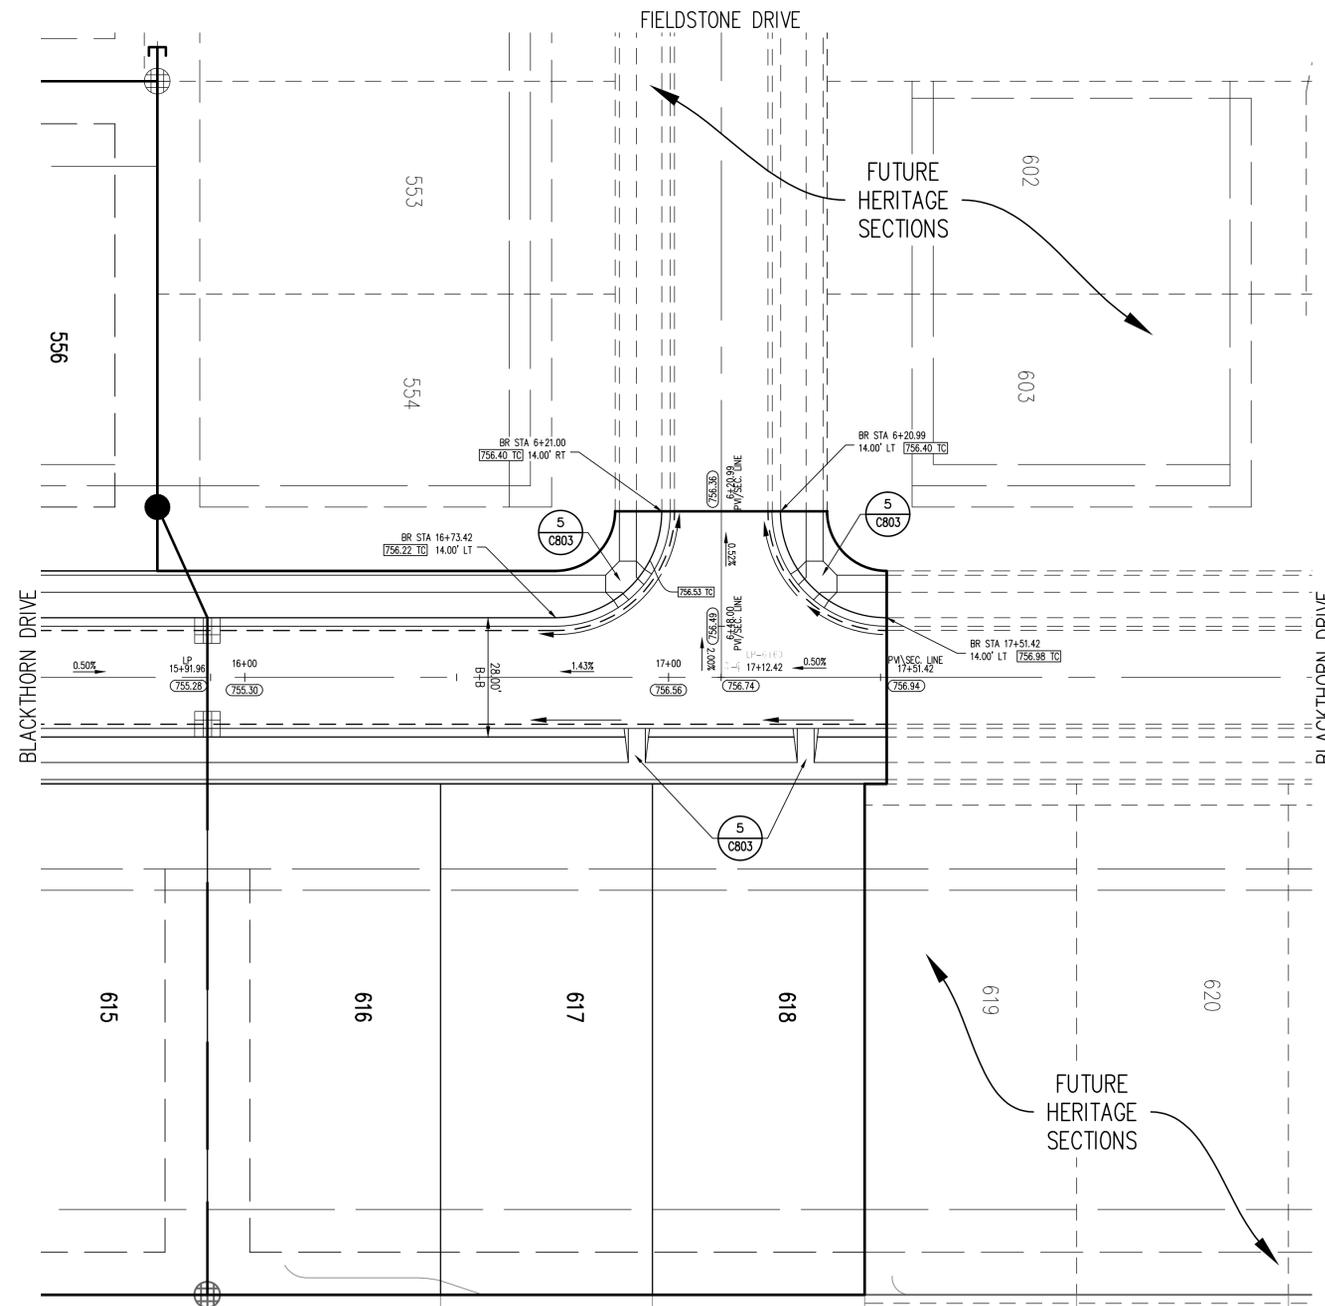

BLACKTHORN DRIVE & FIELDSTONE DRIVE  
SCALE: 1"=20'



1  
C301

**BENCHMARK**

Originating Benchmark = Top of Casting of Sanitary Manhole #576 according to the record drawing from previous job #4569.003 performed by The Schneider Corporation, dated May 13, 2005.  
Elevation = 753.89

BM #9 = Harrison Monument at the intersection Brookshire Drive and Cedarmill Drive along the north side of the round-about  
Elevation = 753.53

**LEGEND**

-  New Storm Sewer
-  New Sanitary Sewer
-  New Pavement Grade
-  All Other Finish Grades
-  Flow Arrow

**GENERAL NOTES**

1. TEMPORARY TRAFFIC CONTROL DURING CONSTRUCTION TO CONFORM TO APPLICABLE LOCAL AND STATE STANDARDS.
2. ALL CONSTRUCTION ACTIVITY ON THIS SITE TO BE PERFORMED IN COMPLIANCE WITH APPLICABLE O.S.H.A. STANDARDS FOR WORKER SAFETY.
3. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO FIELD VERIFY ALL UTILITY LOCATIONS BEFORE CONSTRUCTION BEGINS.
4. CONTRACTORS SHALL MINIMIZE DAMAGE TO EXISTING TREES.
5. ALL ELEVATIONS WITHIN VERTICAL CURVES ARE CORRECTED ELEVATIONS.
6. TRAFFIC CONTROL BARRICADES ARE TO REMAIN DURING ALL CONSTRUCTION.
7. CONTRACTOR TO NOTIFY CITY OF FRANKLIN ENGINEERING DEPARTMENT A MINIMUM OF 24 HOURS PRIOR TO STREET PROOFROLL.
8. TRAFFIC CONTROL AND STREET NAME SIGNAGE TO MEET MUTCD STANDARDS, LATEST EDITION.
9. DIMENSIONS SHOWN ARE TO BACK OF CURB, UNLESS NOTED OTHERWISE.

REVISIONS:



DATE: 03/19/15  
THIS DRAWING AND THE IDEAS, DESIGNS AND CONCEPTS CONTAINED HEREIN ARE THE EXCLUSIVE INTELLECTUAL PROPERTY OF THE SCHNEIDER CORPORATION AND ARE NOT TO BE USED OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE WRITTEN CONSENT OF THE SCHNEIDER CORPORATION.  
© COPYRIGHTED BY THE SCHNEIDER CORP. (2015)



THE SCHNEIDER CORPORATION  
8001 Arrowridge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com

Civil Engineering  
GIS \* LIS  
Land Surveying  
Landscape Architecture

HERITAGE, SECTION 6  
CITY OF FRANKLIN, JOHNSON COUNTY


ARBOR INVESTMENTS, LLC  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015 PROJECT NO: 4569.600  
DRAWN BY: BDP CHECKED BY: TCW

SHEET TITLE: INTERSECTION DETAILS

DRAWING FILES:  
T:\44\4569\600\dwg\C301.dwg  
XREF: T:\44\4569\600\dwg\T16600.dwg  
XREF: T:\44\4569\600\dwg\4569000\_BIS.dwg  
XREF: T:\44\4569\600\dwg\4569000\_FUTURE.dwg  
XREF: T:\44\4569\600\dwg\4569000\_FUTURE.dwg  
XREF: T:\44\4569\600\dwg\4569000.dwg  
XREF: T:\44\4569\600\dwg\4569000.dwg

SHEET NO: C301

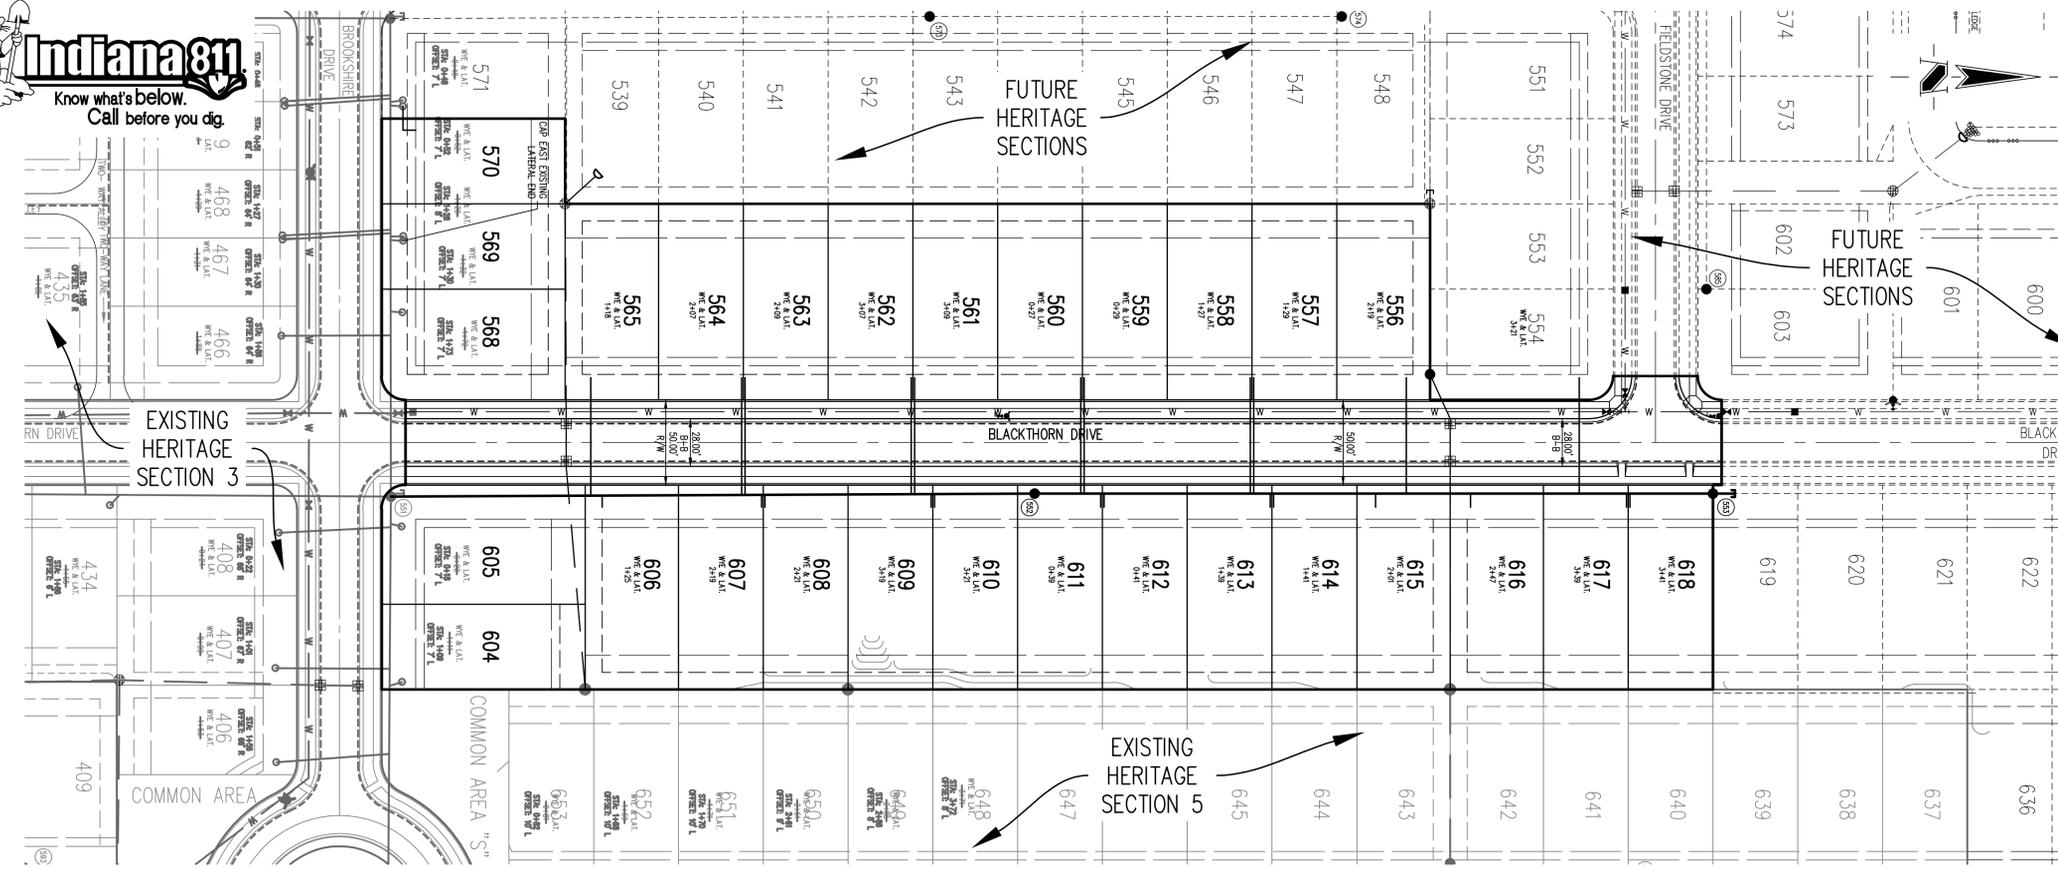

**GENERAL NOTES**

- TEMPORARY TRAFFIC CONTROL DURING CONSTRUCTION TO CONFORM TO APPLICABLE LOCAL AND STATE STANDARDS.
- ALL CONSTRUCTION ACTIVITY ON THIS SITE TO BE PERFORMED IN COMPLIANCE WITH APPLICABLE O.S.H.A. STANDARDS FOR WORKER SAFETY.
- IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO FIELD VERIFY ALL UTILITY LOCATIONS BEFORE CONSTRUCTION BEGINS.
- CONTRACTORS SHALL MINIMIZE DAMAGE TO EXISTING TREES.
- ALL WYE, LATERAL AND PROFILE STATIONS ARE FROM THE NEAREST DOWNSTREAM MANHOLE. (MH)
- WYES AND LATERALS TO BE 6" PIPE UNLESS OTHERWISE SPECIFIED.
- ALL WYE CONNECTIONS SHALL HAVE A MINIMUM OF FIVE (5) FOOT LATERAL EXTENSION CONNECTED TO THE WYE, OR EXTEND TO THE UTILITY AND DRAINAGE EASEMENT OF THE LOT, WHICHEVER IS GREATER, BUT IN NO CASE SHOULD THE END OF THE LATERALS BE CLOSER THAN FIVE (5) FEET TO THE BUILDING LINE, UNLESS NOTED OTHERWISE. THE END OF THE LATERAL SHALL BE PLUGGED OR CAPPED, UNLESS OTHERWISE NOTED.
- LATERALS RUNNING TO THE OPPOSITE SIDE OF THE STREET SHALL EXTEND TO THE UTILITY AND DRAINAGE EASEMENT OF THE LOT, BUT IN NO CASE SHOULD THE END OF THE LATERALS BE CLOSER THAN FIVE (5) FEET TO THE BUILDING LINE, UNLESS OTHERWISE NOTED.
- ALL SANITARY SEWER MAINS & LATERALS WITHIN 5' OF CURB SHALL BE BACKFILLED WITH COMPACTED #5 STONE.



**BENCHMARK**

Originating Benchmark - Top of Casting of Sanitary Manhole #576 according to the record drawing from previous job #4569.003 performed by The Schneider Corporation, dated May 13, 2005.  
Elevation = 753.89

TBM #9 - Harrison Monument at the intersection Brookshire Drive and Cedarmill Drive along the north side of the round-about  
Elevation = 753.53

Sheet	Detail Number	Description
CB04	1	Precast Reinforced Concrete Manhole
CB04	3	Sanitary Sewer Bedding Detail
CB04	4	Service Connection for Shallow Sewer
CB04	5	Wye & Lateral Capping Detail
CB04	5	Service Connection for Deep Sewer

**SANITARY SEWER PLAN**

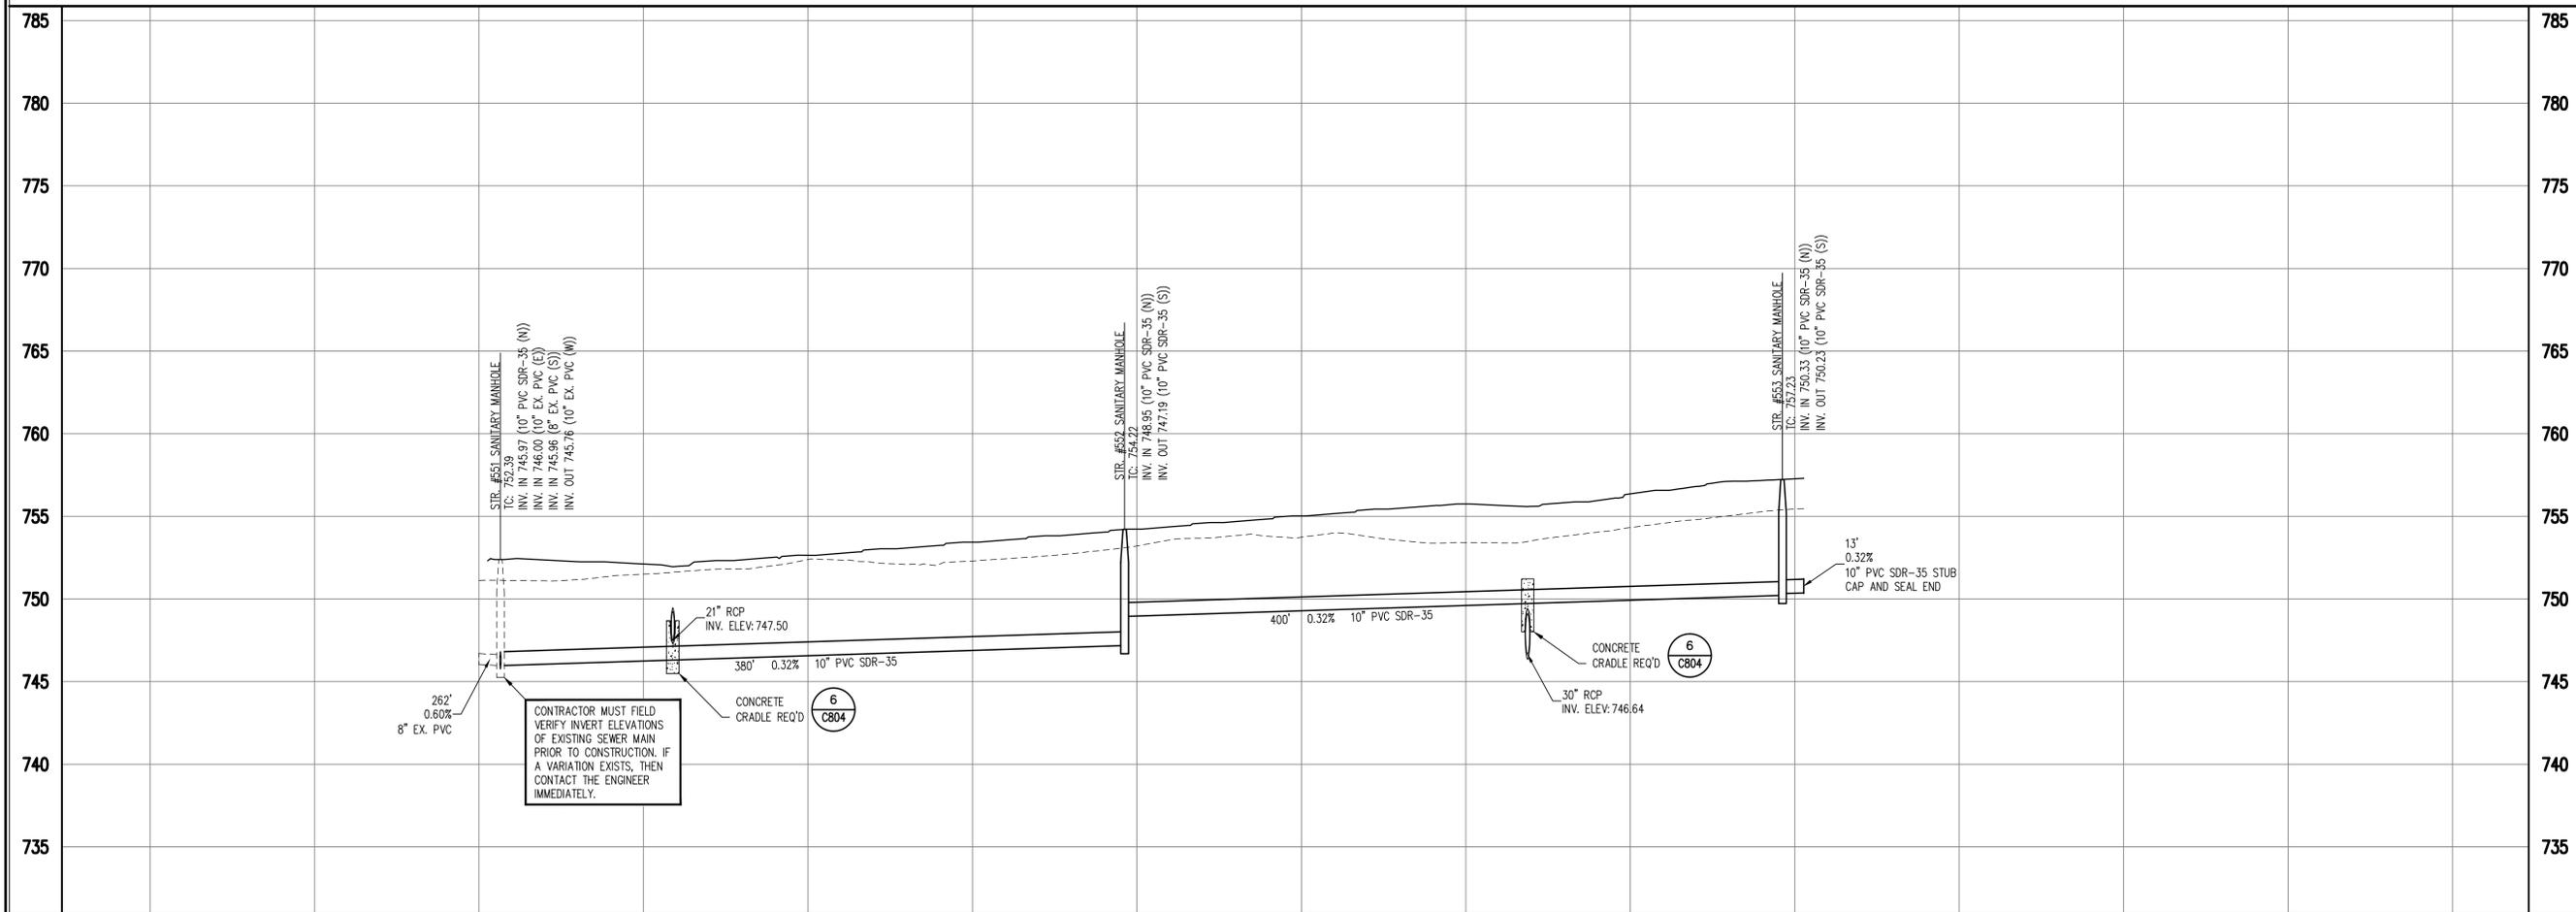

**SANITARY SEWER PROFILE**

**LEGEND**

Existing Grade	New Grade	Granular Backfill

SCALE:  $\frac{HORIZ.: 1"=50'}{VERT.: 1"=5'}$

REVISIONS:

Professional Engineer Seal for Todd C. Wallace, No. PE11011389, State of Indiana. Date: 03/19/15. Copyrighted by The Schneider Corp. (2015).

**Schneider**  
THE SCHNEIDER CORPORATION  
8001 Arrowridge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com



Civil Engineering  
GIS - LIS  
Land Surveying  
Landscape Architecture

**HERITAGE, SECTION 6**  
CITY OF FRANKLIN, JOHNSON COUNTY  
ARBOR INVESTMENTS, LLC  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015 PROJECT NO.: 4569.600  
DRAWN BY: BDP CHECKED BY: TCW  
SHEET TITLE: SANITARY SEWER PLAN AND PROFILES  
DRAWING FILES:  
T:\44\4569\600\dwg\C401.dwg  
XREF: T:\44\4569\600\dwg\T16600.dwg  
XREF: T:\44\4569\600\dwg\4569600\_BIS.dwg  
XREF: T:\44\4569\600\dwg\4569600\_FUTURE5.dwg  
XREF: T:\44\4569\600\dwg\4569600\_FUTURE5\_MW.dwg  
XREF: T:\44\4569\600\dwg\4569600.dwg  
XREF: T:\44\4569\600\dwg\4569600.dwg

SHEET NO.: **C401**

Plot Date: Mar 19, 2015 Plot Time: 11:32am File Name: T:\44\4569\600\dwg\C401.dwg Layout: C401 By: bdp

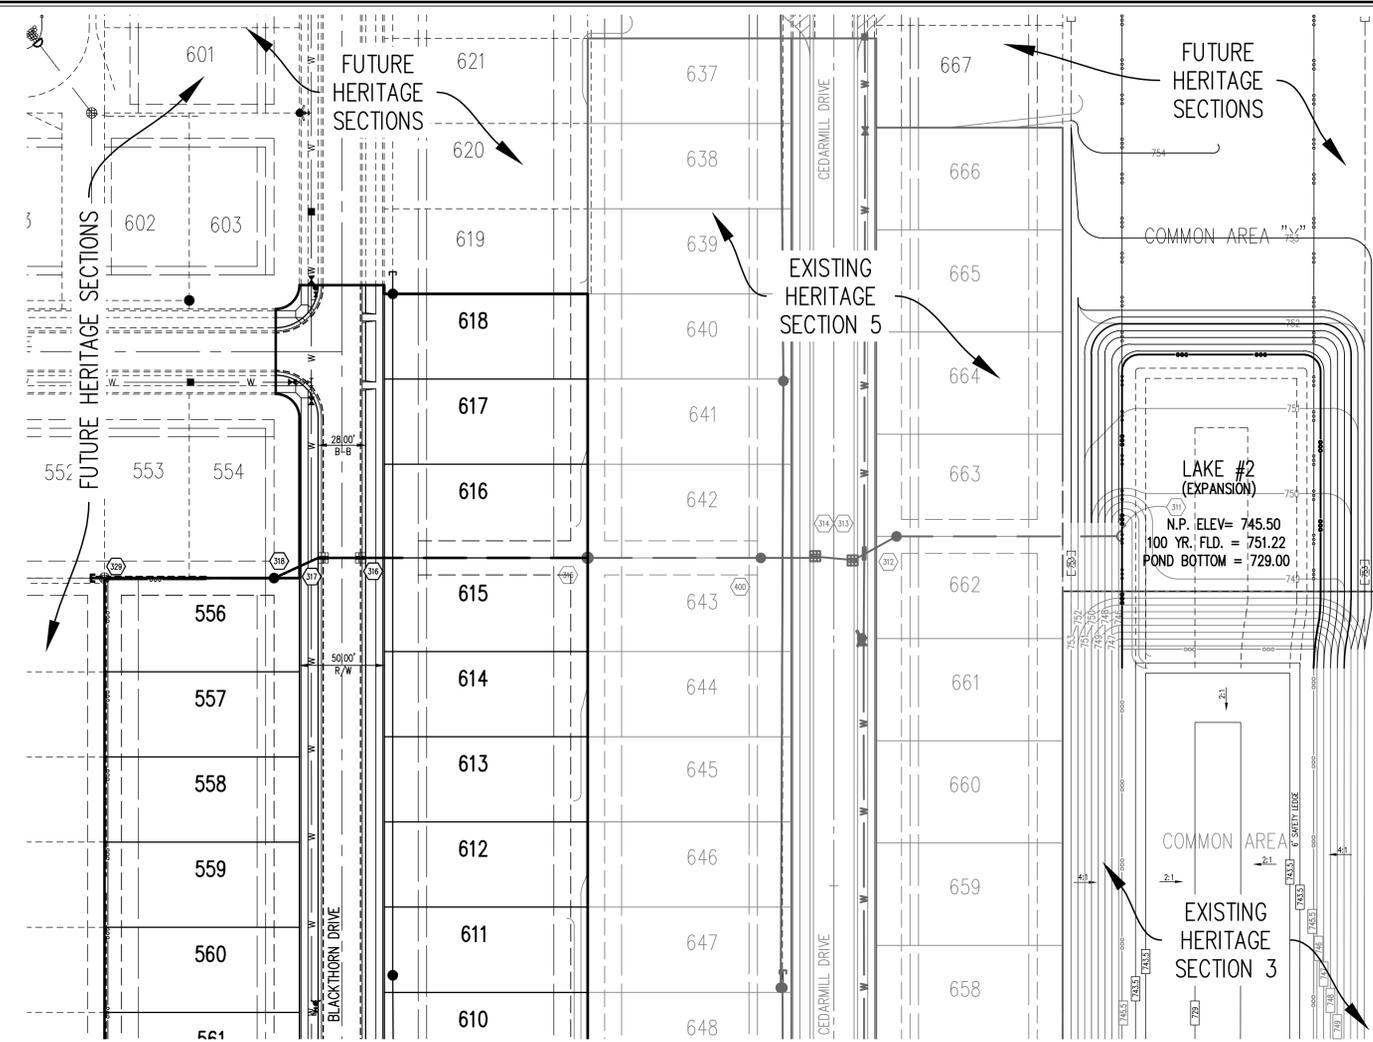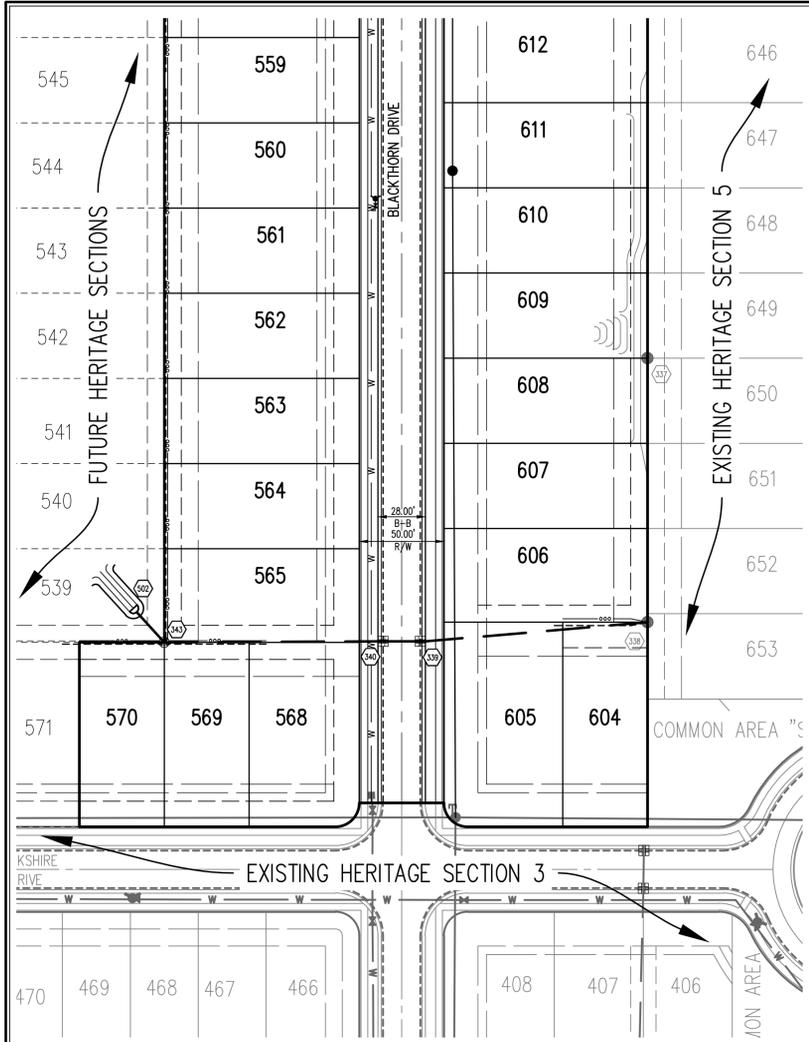

**Indiana 811**  
Know what's below. Call before you dig.

**GENERAL NOTES**

- TEMPORARY TRAFFIC CONTROL DURING CONSTRUCTION TO CONFORM TO APPLICABLE LOCAL AND STATE STANDARDS.
- ALL CONSTRUCTION ACTIVITY ON THIS SITE TO BE PERFORMED IN COMPLIANCE WITH APPLICABLE O.S.H.A. STANDARDS FOR WORKER SAFETY.
- IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO FIELD VERIFY ALL UTILITY LOCATIONS BEFORE CONSTRUCTION BEGINS.
- CONTRACTORS SHALL MINIMIZE DAMAGE TO EXISTING TREES.
- REMOVE AND BACKFILL ALL AREAS WHERE ANY FIELD TILE CROSSES PROPOSED HOUSE PADS. ALL FIELD TILES INTERCEPTED TO BE PERPETUATED INTO STORM SEWER SYSTEM OR LAKE. THE CONTRACTOR SHALL NOTIFY IN WRITING THE OWNER AND THE ENGINEER IN ANY CIRCUMSTANCES WHERE THIS CANNOT BE ACCOMPLISHED.
- ALL STORM SEWER CASTINGS SHALL BE STAMPED "DUMP NO WASTE, DRAINS TO WATERWAYS".
- PORTIONS OF THE SITE HAVE BEEN PREVIOUSLY MASS GRADED TO APPROXIMATE FINISHED ELEVATIONS SHOWN. THE EXISTING TOPOGRAPHIC INFORMATION SHOWN IS FROM PRIOR TO THE MASS GRADING ACTIVITIES AND MAY NOT REPRESENT THE CURRENT CONDITIONS.

**BENCHMARK**

Originating Benchmark - Top of Casting of Sanitary Manhole #576 according to the record drawing from previous job #4569.003 performed by The Schneider Corporation, dated May 13, 2005.  
Elevation = 753.89

**TBM #** - Harrison Monument at the intersection Brookshire Drive and Cedar Mill Drive along the north side of the round-about  
Elevation = 753.53

**LAKE #2 (EXPANSION)**  
N.P. ELEV = 745.50  
100 YR. FLD. = 751.22  
POND BOTTOM = 729.00

Sheet Detail Number	Description
C805 1	Bedding Detail - Reinforced Concrete Pipe (RCP)
C805 4,6	Roll Curb Inlet Detail
C803 6	Pavement Underdrain Detail
C805 5	Beehive Inlet Detail
C805 3	Storm Manhole Detail
C805 7	Precast Concrete End Section
C805 10	RipRap Detail @ End Section

**LEGEND/DETAILS**

NOTE

REVISIONS:

**TOM C. WALLACE**  
REGISTERED PROFESSIONAL ENGINEER  
No. PE11011389  
STATE OF INDIANA

DATE: 03/19/15

THIS DRAWING AND THE IDEAS, DESIGNS AND CONCEPTS CONTAINED HEREIN ARE THE EXCLUSIVE INTELLECTUAL PROPERTY OF THE SCHNEIDER CORPORATION AND ARE NOT TO BE USED OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE WRITTEN CONSENT OF THE SCHNEIDER CORPORATION.


© COPYRIGHTED BY THE SCHNEIDER CORP. (2015)

**Schneider**

THE SCHNEIDER CORPORATION  
8001 Arrowridge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com

STORM SEWER PLAN

SCALE: 1"=50'

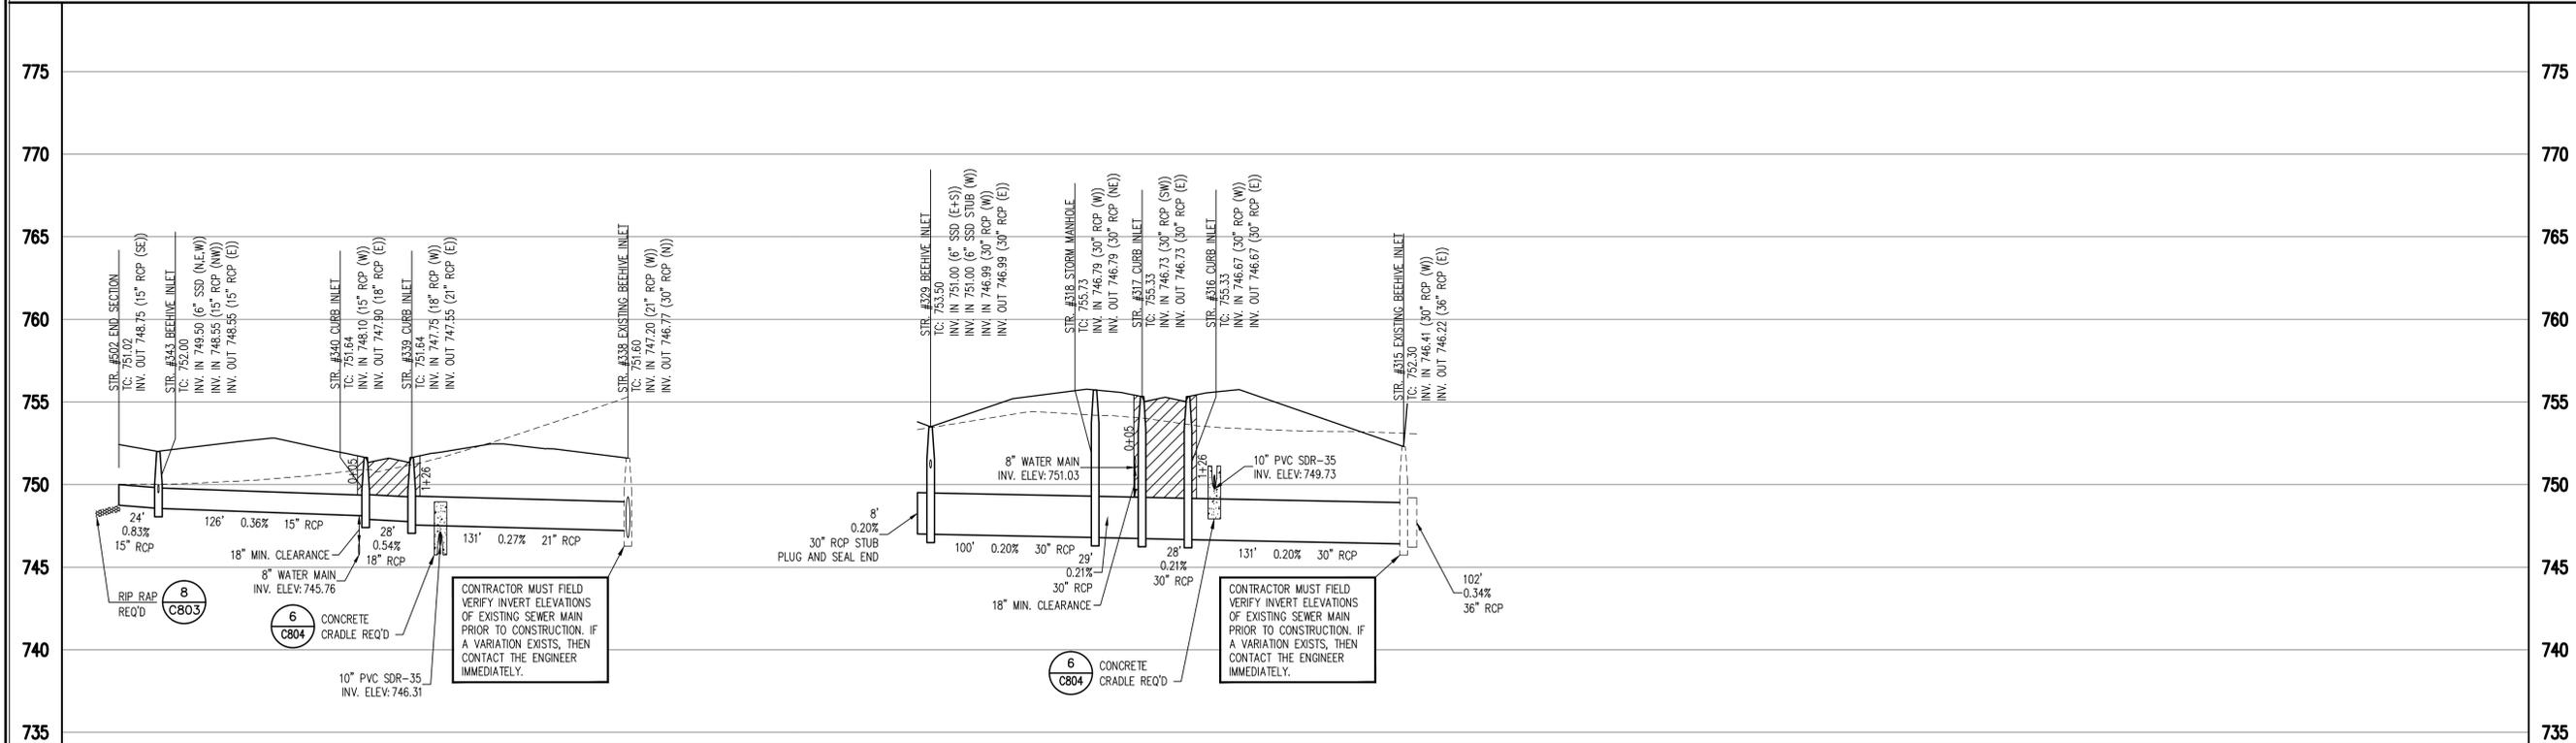

STORM SEWER PROFILE

SCALE: HORZ.: 1"=50'  
VERT.: 1"=5'

**LEGEND**

Existing Grade

New Grade

Granular Backfill




Civil Engineering  
GIS - LIS  
Land Surveying  
Landscape Architecture

HERITAGE, SECTION 6  
CITY OF FRANKLIN, JOHNSON COUNTY  
ARBOR INVESTMENTS, LLC  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250




DATE: 03/19/2015 PROJECT NO.: 4569.600  
DRAWN BY: BDP CHECKED BY: TCW  
SHEET TITLE: STORM SEWER PLAN AND PROFILES  
DRAWING FILES:  
T:\44\4569\600\dwg\C601.dwg  
T:\44\4569\600\dwg\T10600.dwg  
T:\44\4569\600\dwg\4569000\_BIS.dwg  
T:\44\4569\600\dwg\4569000\_FUTURE.dwg  
T:\44\4569\600\dwg\4569000\_FUTURE.dwg  
T:\44\4569\600\dwg\4569000.dwg  
T:\44\4569\600\dwg\4569000.dwg  
T:\44\4569\600\dwg\4569000.dwg

SHEET NO.: C601

Plot Date: Mar 19, 2015 Plot Time: 11:34am File Name: T:\44\4569\600\dwg\C601.dwg Layout: C601 By: bdp

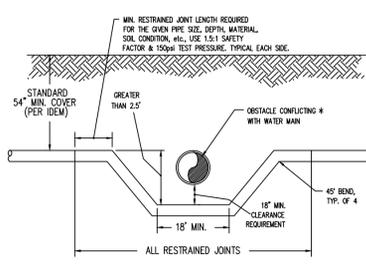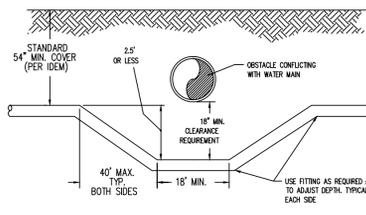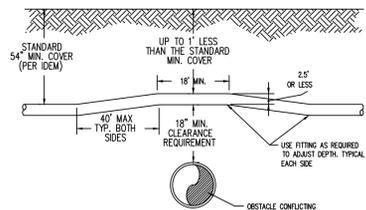


**UTILITY CONFLICTS/CROSSINGS DETAILS**

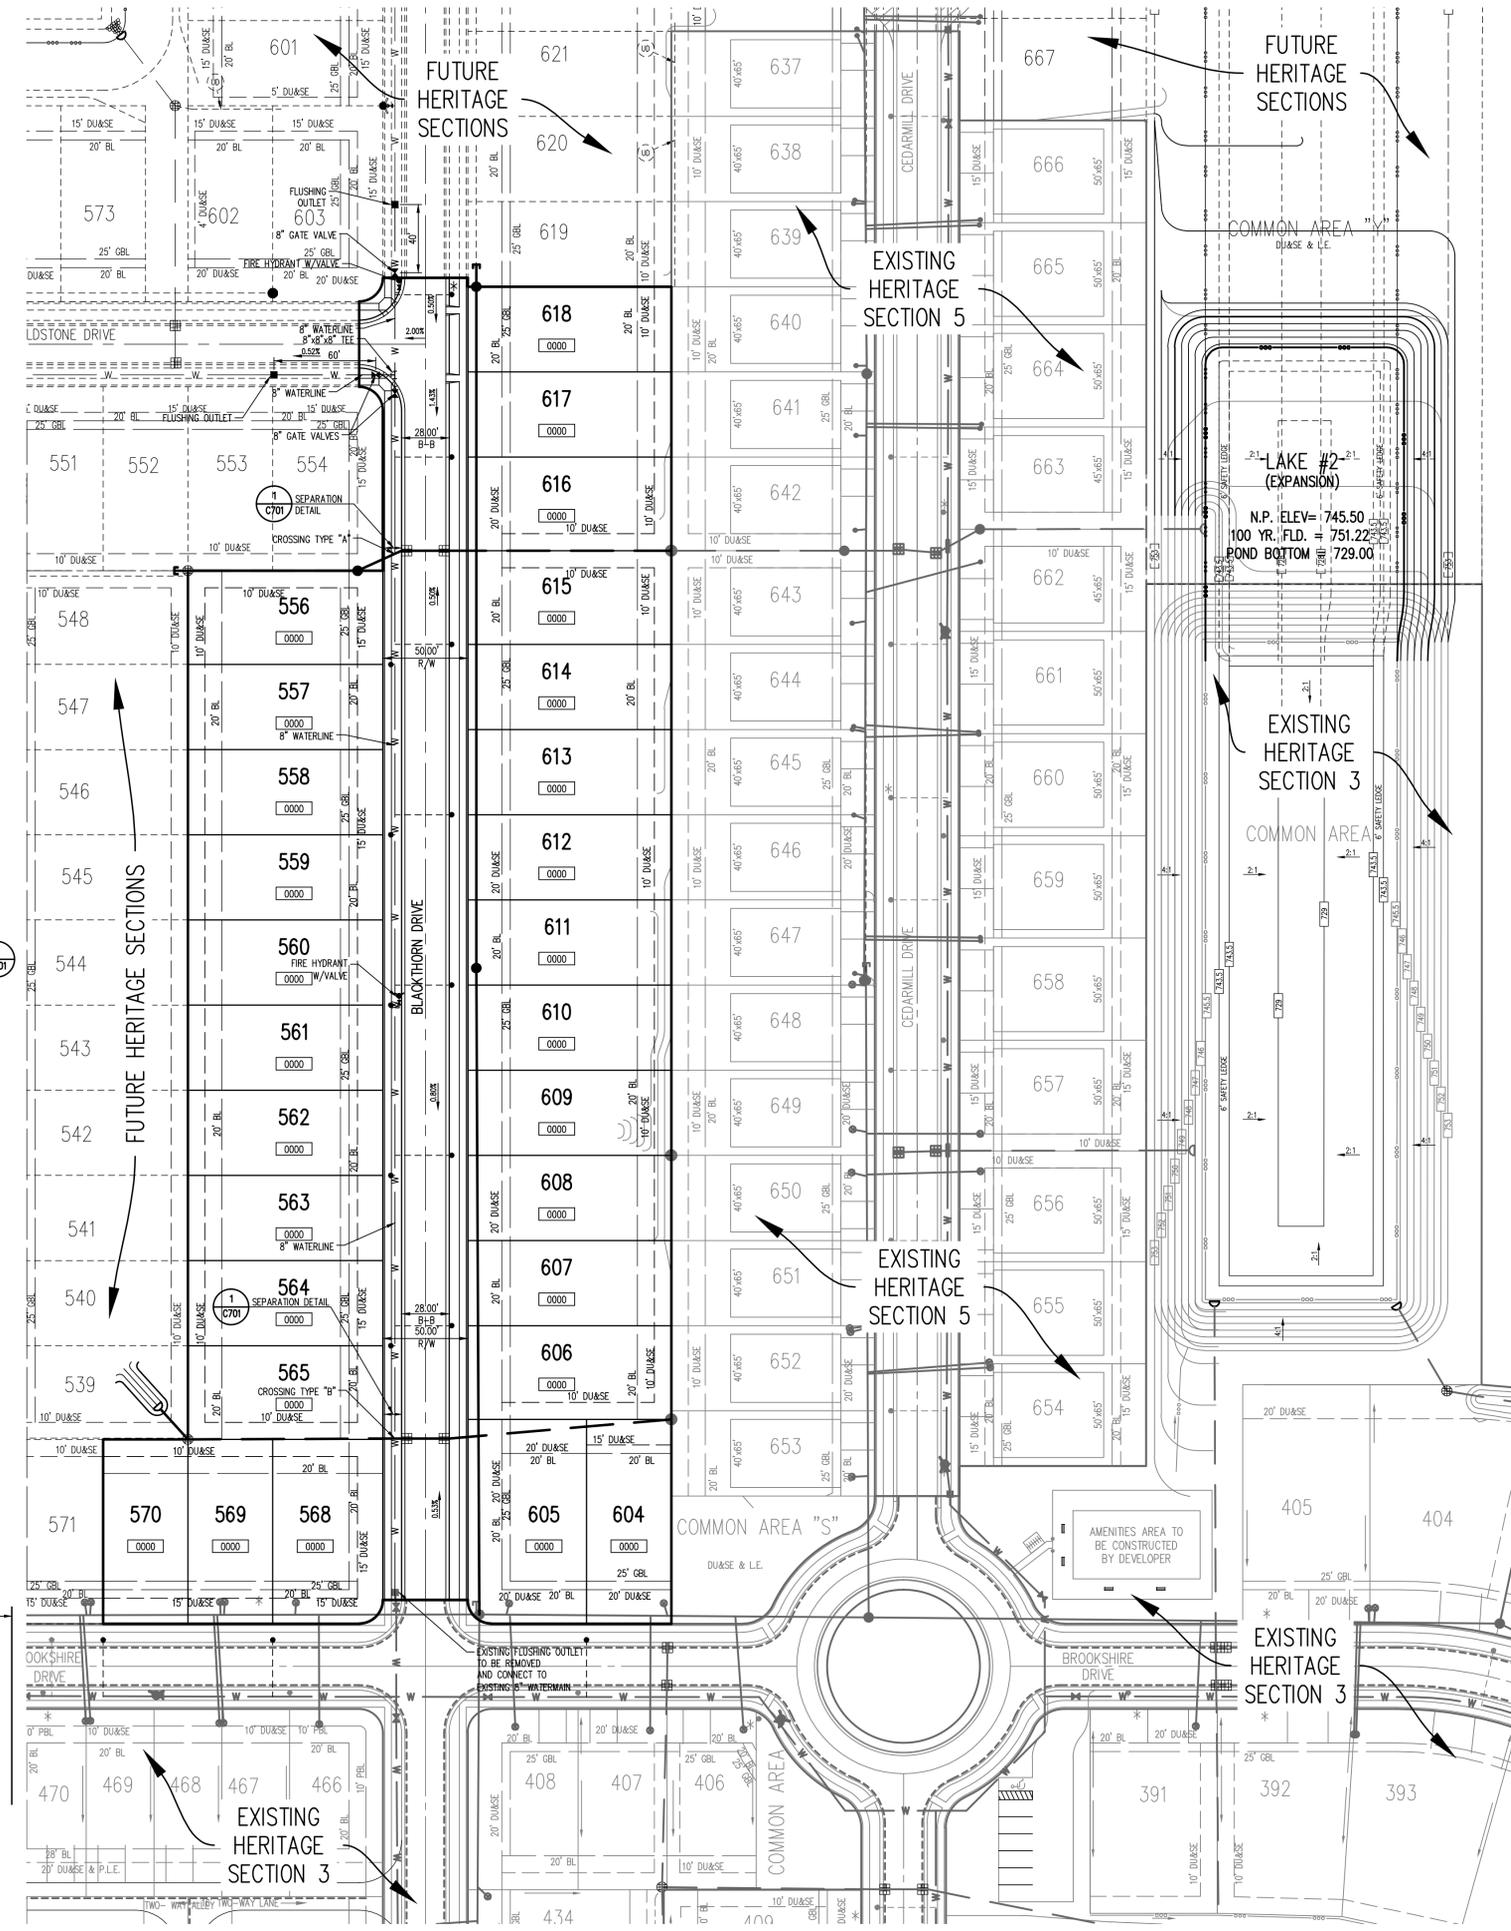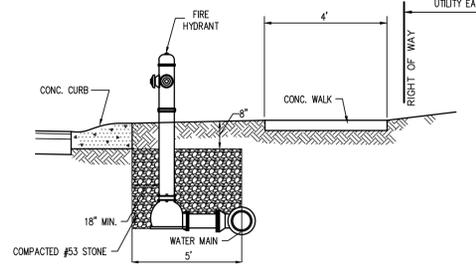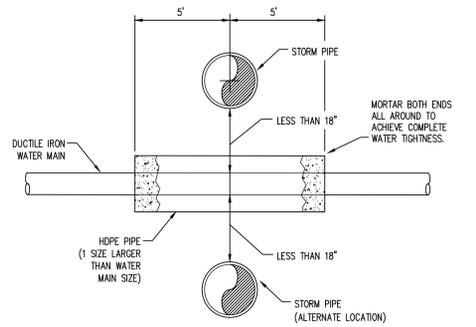

**LEGEND**

- Proposed Contour
- Existing Storm Sewer
- Proposed Storm Sewer
- Existing Sanitary Sewer
- Proposed Sanitary Sewer
- Proposed Water Line w/ Hydrant & Valve
- Existing Water Line
- Water Line lateral with Water Meter Service Pit (Double Service Pit unless noted as single service pit by " ")





**GENERAL NOTES**

1. PUBLIC WATER MAINS AND FIRE HYDRANTS TO BE INSTALLED PER INDIANA AMERICAN WATER COMPANY SPECIFICATIONS. FOR REQUIRED INSPECTIONS CONTACT INDIANA AMERICAN WATER COMPANY 317-881-0270.
2. WATER MAIN MATERIALS MUST BE EITHER CLASS 350 DUCTILE IRON, OR AWWA C-900 RATED, DR-18 THICKNESS PVC PIPE.
3. ALL WATER MAINS ARE TO BE A MINIMUM OF 12" FROM BACK OF CURBS.
4. FIRE HYDRANTS SHOULD RISE IN FRONT OF THE SIDEWALK A MINIMUM OF 18" FROM BACK OF CURB. THE 5" STORZ CONNECTION SHALL FACE THE STREET.
5. MARK "A" IN CURB OPPOSITE ALL VALVES.
6. SEE SHEET C702 FOR WATERLINE NOTES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO CONTACT THE CITY OF FRANKLIN ENGINEER AND INDIANA AMERICAN WATER COMPANY FOR ANY UPDATES TO THE DETAILS AND SPECIFICATIONS.
7. IT IS THE CONTRACTOR'S RESPONSIBILITY TO CONTACT THE CITY OF FRANKLIN ENGINEERING DEPARTMENT AND INDIANA AMERICAN WATER COMPANY TO SCHEDULE A PRE-CONSTRUCTION MEETING PRIOR TO STARTING CONSTRUCTION.
8. PERMANENT FLUSH PITS ARE TO BE LOCATED IN PARK STRIP BETWEEN CURB AND WALK.
9. CHLORINATION TAPS AND SAMPLE TAPS ARE TO BE LOCATED ON THE LOT SIDE OF THE WATER MAIN.
10. ANY PART OF THE WATER MAIN TRENCH RUNNING UNDER PAVED AREAS OR WITHIN FIVE (5) FEET OF PAVEMENT/ SIDEWALKS ARE TO BE BACKFILLED WITH GRANULAR MATERIAL.
11. THE CURVATURE OF WATER MAINS SHALL BE OBTAIN USING A COMBINATION OF FITTINGS IN SUCH A WAY AS TO AVOID INSTALLING THE PIPE IN A "BEND" OR IN BENT TENSION.
12. WATER MAINS MAY NOT BE UNDER SIDEWALKS, WALKWAYS, LANDSCAPING, OR MOUNDING.
13. FIRE HYDRANTS SHALL BE INSTALLED, FUNCTIONAL, AND APPROVED BY THE FRANKLIN FIRE DEPARTMENT PRIOR TO THE ISSUANCE OF ANY BUILDING PERMITS.
14. WATER SERVICE LATERALS AND WATER METER PITS TO BE INSTALLED BY OTHERS AT TIME OF HOME CONSTRUCTION.
15. SEE SHEET C702 FOR ADDITIONAL WATER DISTRIBUTION NOTES & DETAILS.
16. WATER MAINS MUST MAINTAIN A MIN. 10" SEPERATION FROM SANITARY & STORM SEWER LINES & STRUCTURES PER TEN STATE STANDARD AND INDIANA CODE 327IAC2-9, 327IAC3-6-9, & 327IAC3-9

**BENCHMARK**

Originating Benchmark - Top of Casting of Sanitary Manhole #576 according to the record drawing from previous job #4569.003 performed by The Schneider Corporation, dated May 13, 2005. Elevation = 753.89


BM #9 - Harrison Monument at the intersection Brookshire Drive and Cedarhill Drive along the north side of the round-about. Elevation = 753.53

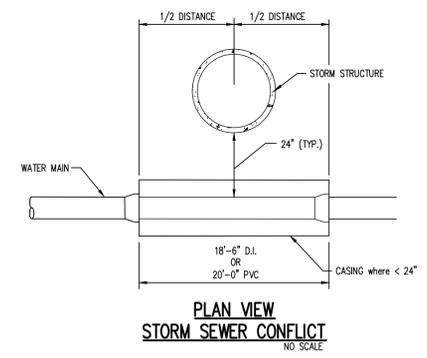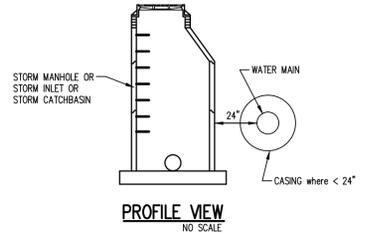

NOTE:  
1) AS NECESSARY, PROVIDE APPROPRIATE JOINT RESTRAINT ON A CLOSE PROXIMITY CROSSING OF STORM SEWER STRUCTURES.  
2) ALL PIPE WILL FULLY COMPLY WITH INAWC PIPELINE SPECIFICATIONS, INCLUDING BUT NOT LIMITED TO SECTION 15106, SECTION 15121, AND SECTION 02025.



REVISIONS:

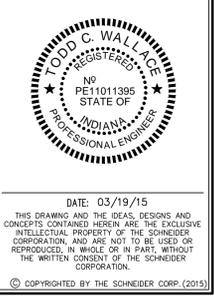

**THE SCHNEIDER CORPORATION**  
8001 Arrowridge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com

Civil Engineering  
GIS = LIS  
Land Surveying  
Landscape Architecture

**HERITAGE, SECTION 6**

**CITY OF FRANKLIN, JOHNSON COUNTY**


**ARBOR INVESTMENTS, LLC**  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015 PROJECT NO: 4569.600  
DRAWN BY: BDP CHECKED BY: TCW  
SHEET TITLE: WATER DISTRIBUTION PLAN  
DRAWING FILES:  
T:\44\4569\600\dwg\C701.dwg  
XREF: T:\44\4569\600\dwg\T10600.dwg  
XREF: T:\44\4569\600\dwg\4569600\_BIS.dwg  
XREF: T:\44\4569\600\dwg\4569600\_FUTURE5.dwg  
XREF: T:\44\4569\600\dwg\4569600\_FUTURE5.dwg  
XREF: T:\44\4569\600\dwg\4569105.dwg  
XREF: T:\44\4569\600\dwg\4569105.dwg  
XREF: T:\44\4569\600\dwg\4569105.dwg


SHEET NO: **C701**

Plot Date: Mar 19, 2015 Plot Time: 11:44am File Name: T:\44\4569\600\dwg\C701.dwg, Layout: C701 By: bdp


File Name: T:\AK\4569\600\dwgs\C702.dwg, Layout: Model  
 Plot Date: Mar 19, 2015  
 Plot Time: 11:45am  
 By: bdp

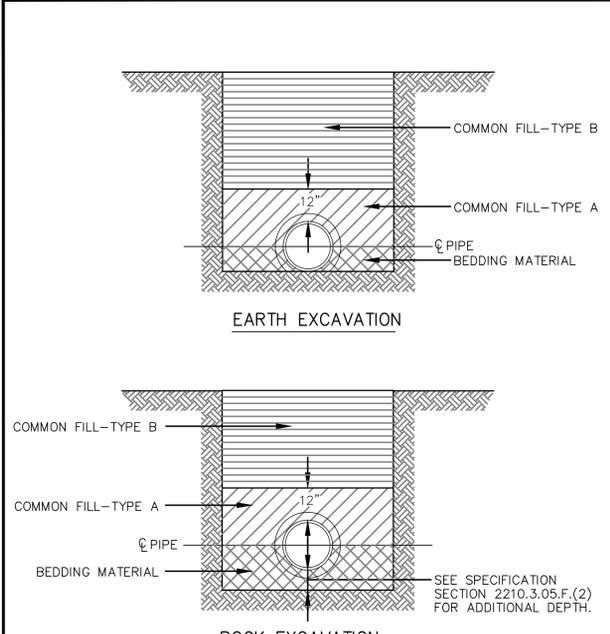

**TRENCH BACKFILL MATERIALS**  
NO SCALE  
61-300-3 SK

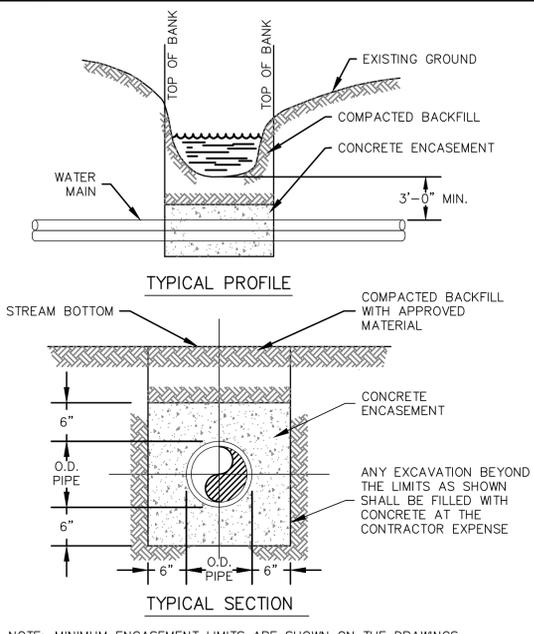


**STREAM CROSSING DETAIL**  
NO SCALE  
61-300-5 SK

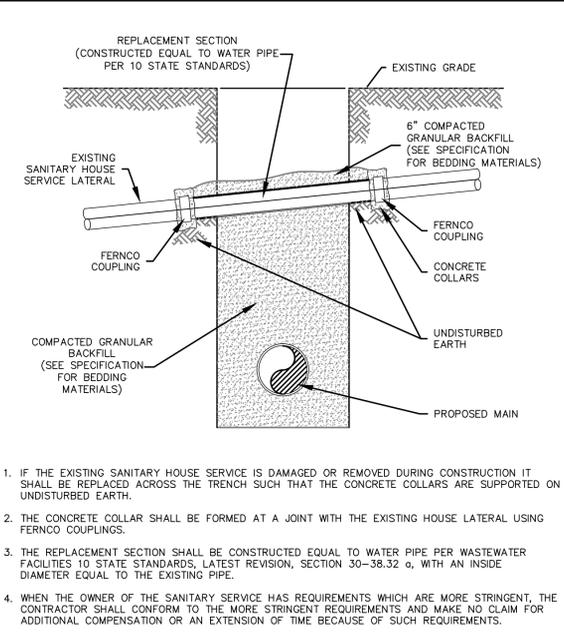


**SANITARY HOUSE SERVICE REPLACEMENT DETAIL**  
NO SCALE  
61-300-1 SK


**STORM SEWER REPLACEMENT DETAIL**  
NO SCALE  
61-300-2 SK

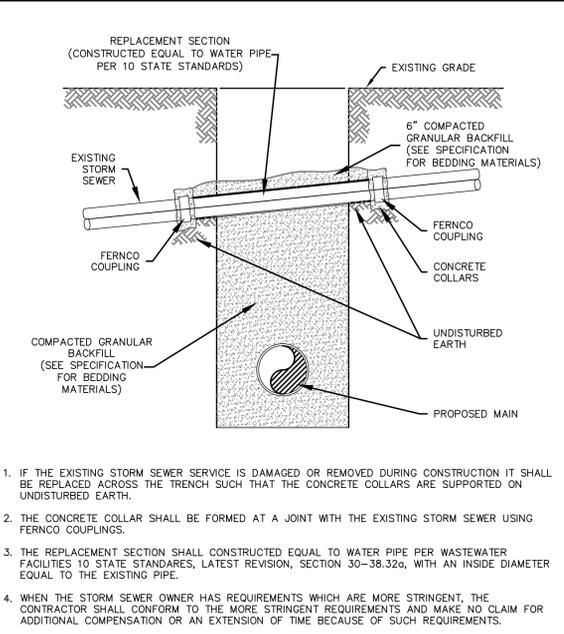


**SHALLOW BURY AIR RELEASE VALVE DETAIL**  
NO SCALE  
61-300-8A SK

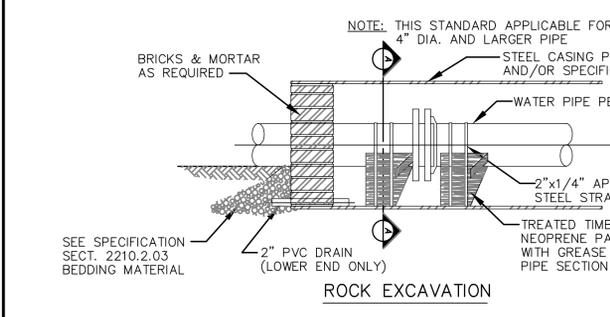


**TYPICAL CASING INSTALLATION**  
NO SCALE  
61-300-4 SK

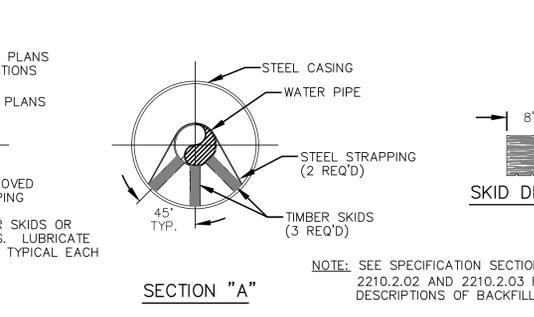


**SECTION "A"**  
NO SCALE  
61-300-5 SK

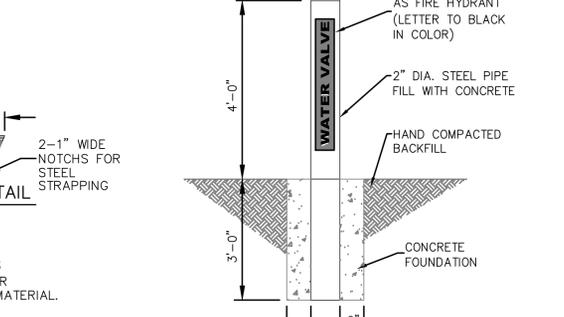


**VALVE MARKER POST DETAIL**  
NO SCALE  
31-600-14 SK

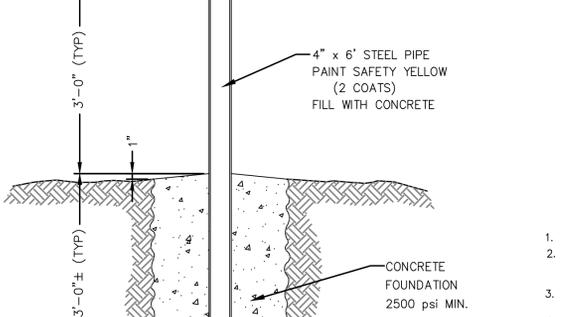


**PIPE BOLLARD DETAIL**  
NO SCALE  
31-600-13 SK

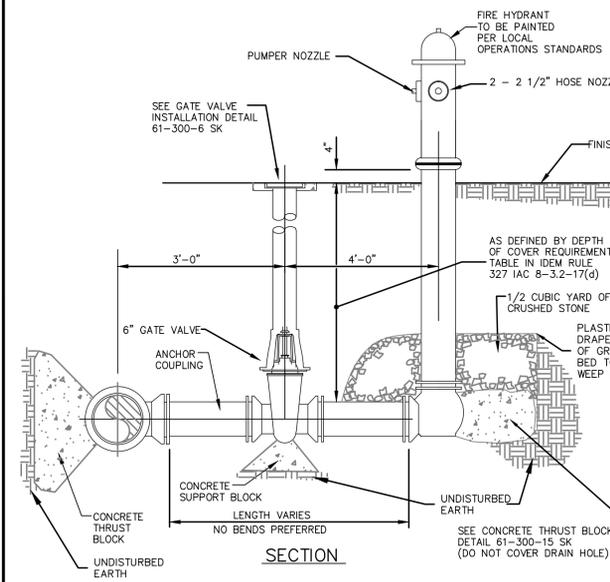

**FIRE HYDRANT DETAILS**  
NO SCALE  
61-300-7 SK

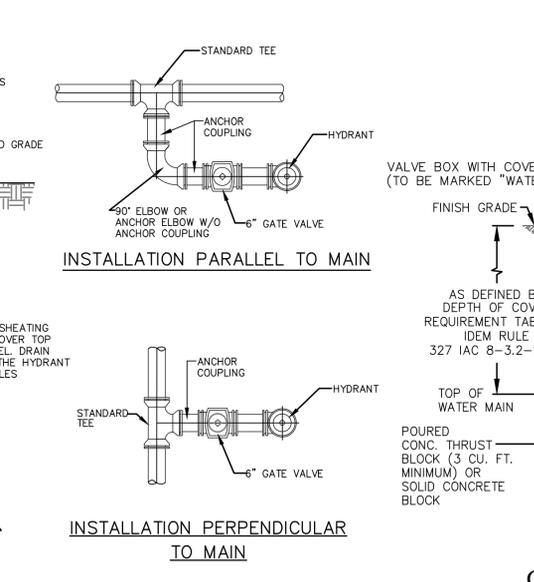

**GATE VALVE INSTALLATION DETAIL**  
NO SCALE  
61-300-6 SK

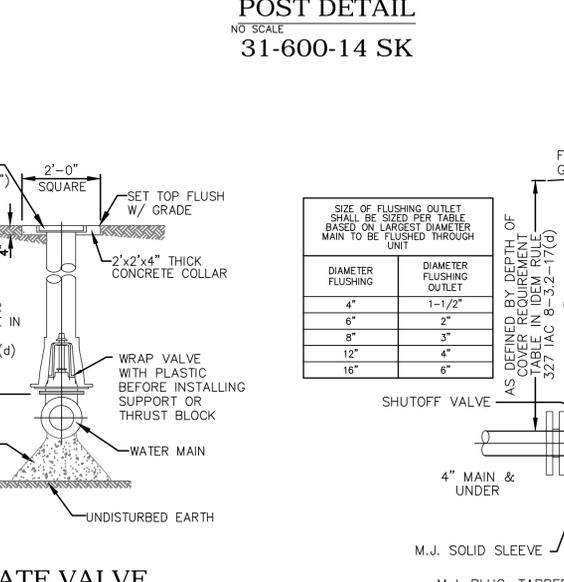

**BLOW-OFF/FLUSHING OUTLET DETAIL**  
NO SCALE  
61-300-9 SK


**THRUST BLOCK REQUIREMENTS**

FITTING	TOTAL POUNDS THRUST	TOTAL BEARING AREA (S.F.)	THRUST BLOCK HEIGHT (FT.)	THRUST BLOCK WIDTH (FT.)
6" 90° BEND	12,000	6	2.5	2.5
6" 45° BEND	6,700	3.5	1.75	2
6" TEE OR PLUG	8,400	4	2	2
8" 90° BEND	19,000	9	3	3
8" 45° BEND	10,500	5	2.5	2
8" TEE OR PLUG	13,500	6.5	2.75	2.5
10" 90° BEND	28,000	14	4	3.5
10" 45° BEND	15,500	8	2.75	3
10" TEE OR PLUG	19,500	10	3.5	3
12" 90° BEND	41,000	20	4	5
12" 45° BEND	23,000	12	3	4
12" TEE OR PLUG	28,000	14	3.5	4
16" 90° BEND	70,000	35	6	6
16" 45° BEND	38,000	19	4	5
16" TEE OR PLUG	50,000	25	5	5

**THRUST BLOCK NOTES:**

- PIPE JOINT AND BOLTS MUST BE ACCESSIBLE.
- CONCRETE SHALL BE CURED FOR MINIMUM OF 7 DAYS AND SHALL HAVE A COMPRESSION STRENGTH OF 3000 P.S.I. @ 28 DAYS.
- THRUST BLOCKS SHALL BE POSITIONED TO COUNTERACT THE DIRECTION OF THE RESULTANT THRUST FORCE.
- CONTRACTOR SHALL NOTIFY ENGINEER IF SOIL OF LESS THAN 2000 P.S.F. IS ENCOUNTERED.
- FIVE (5) MIL POLYETHYLENE PLASTIC SHALL BE USED TO COVER FITTINGS PRIOR TO POURING THE THRUST BLOCK.

**THRUST BLOCK DESIGN DATA**  
MAXIMUM OPERATING PRESSURE: 85 P.S.I.  
SURGE ALLOWANCE: 100 P.S.I.  
THRUST DESIGN PRESSURE: 185 P.S.I.  
BASED ON 2000 P.S.F. SOIL

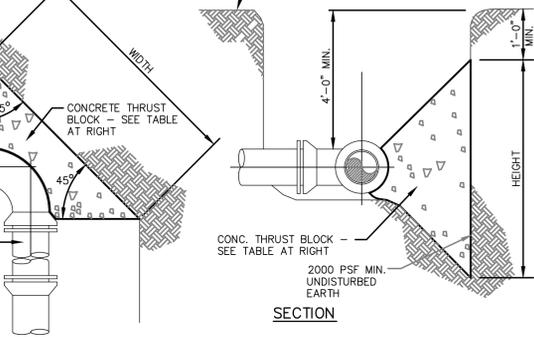

**THRUST BLOCK DETAILS**  
NO SCALE  
61-300-15 SK

**Indiana-American Water Company, Inc.**

SCALE: NOT TO SCALE	HERITAGE		
REVISIONS	SECTION 6		
	STANDARD DETAILS		
	INDIANA COUNTY, INDIANA		
DRAWN BY: R.K.B.	DATE: 5/99	CHECKED:	SHEET
AUTOCAD FILE: D:\DETAILS\STD02LS2.DWG	APPROVED:		C702

**STORMWATER POLLUTION PREVENTION PLAN INDEX**

A1 Plan Index provided below

A2 11"x17" Plot denoting lot numbers, boundaries and streets can be provided separately.

A3 Project Type: 28 lot single family subdivision.

A4 Vicinity Map: Located on Sheet C100

A5 Legal Description of Project Site: See PLAT 2 OF 2.

A6 Location of all lots and proposed site improvements: See Sheet C101.

A7 14 digit Hydrologic Unit Code: 021204090000

A8 State or Federal water quality permits: Rule 5.

A9 Specific points where stormwater discharge will leave the site: Storm runoff from the Heritage Section 6 will flow southwest into an existing detention pond in Heritage Section 3 before eventually discharging to Hurricane Creek. See Site Development Plan Sheet C100 for more detail.

A10 Location of all wetlands, lakes & water courses on and adjacent to site: See Site Development Plan Sheet C101 for more detail.

A11 Receiving Waters: Hurricane Creek

A12 Identification of potential discharges to groundwater: Detention ponds are potential sources for discharge to groundwater supplies.

A13 100 Year Floodplains, Floodways and Flood Fringes: None.

A14 Pre-Construction and Post Construction Peak Discharge:  
 100yr Pre-Construction Peak Discharge = 7.27 CFS  
 100 Post Construction Peak Discharge = 12.34 CFS

A15 Adjacent Land Use (See Stormwater Pollution Prevention Plan – Pre-Construction Plan Sheets C103 for more information):  
 North: Agricultural  
 South: Residential  
 East: Residential  
 West: Agricultural

A16 Locations and approximate boundaries of all disturbed areas: See Sheets C103 for locations.

A17 Identification of existing vegetative cover: See Stormwater Pollution Prevention Plan – Pre-Construction Plan Sheets C103.

A18 Soils Map including descriptions and limitations: See Sheet C802 for soils map, description and limitations.

A19 Locations, size and dimensions of proposed stormwater systems: See Site Development Plan Sheet C101 for proposed storm sewer system.

A20 Locations, size and dimensions of any proposed off-site construction activities associated with this project: (None)

A21 Locations of Soil Stockpiles: See Stormwater Pollution Prevention Plan – Pre-Construction Plan Sheets C103 for soil stockpile location(s).

A22 Existing site topography: See Site Development Plan Sheet C101 for existing site topography and proposed final topography. See Site Development Plan Sheet C101 for proposed site grading and drainage patterns.

B1 Description of potential pollutants sources associated with the construction activities: Silt and sediment from exposed soils, leaves, mulch, vehicular sources such as leaking fuel or brake fluid, brake dust, trash, debris, biological agents found in trash, fertilizers, herbicides, pesticides, acid rain, lime dust and concrete washout.

B2 Sequencing of stormwater quality implementation relative to land disturbance activities:  
 This plan has been created in an effort to eliminate sediment from leaving the Heritage Section 6 project during construction protecting the adjoining properties and the Gray Creek waters. In its existing condition, the existing project area drains into shallow concentrated flow prior to entering a detention pond then discharging to Gray Creek. This condition will be continued during and after construction. In the post construction condition, BMP forebays and a hydrodynamic separator will receive runoff before it enters the ponds.

**PRE-CONSTRUCTION ACTIVITIES:**

- Call the Indiana Underlayment Protection Systems, Inc. ("Haley Waley") at 811 to check the locations of any existing utilities.
- A construction entrance shall be placed per the plan location.
- In orange construction fence shall be constructed along the perimeter of the tree preservation areas prior to pre-construction meeting with SMP Inspector.
- A silt fence shall be installed at the edges of the project site where there is potential for any stormwater runoff. Potential areas are identified based on existing topography in the areas of the frontage along Worthville Road and perimeters of the site. Silt fence shall be in place prior to pre-construction meeting.
- Evaluate, mark and protect important trees and associated root zones. Evaluate existing vegetation suitable for use as filter strips along the North, South, East and West boundaries.
- Establish onsite location for owner/operator/contractor placement of approved plans and Rules 5 and 9 inspection documents and vehicles as far from detention ponds and swales as possible. Install trash dumpster and place part-to-net as shown on the plans.
- Items 1-7 above are to be completed prior to calling for pre-construction meeting and prior to any soil alterations.
- Contractor shall have a preconstruction meeting with the City of Greenwood – MS4 at least 48 hours prior to any earthmoving activities.

**CONSTRUCTION ACTIVITIES:**

- Once erosion and sediment control measures are in place, begin land clearing followed immediately by rough grading. Do not leave large areas unprotected for more than 15 days. Rule 5 requires that all disturbed areas that potentially will be idle for 15 days or more will be stabilized (seeded, mulched, etc.) immediately.
- After completion of mass grading, final grade and seed pond banks, landscape berms, common areas and swales immediately after grading is completed.
- Lining of streets should be done prior to the installation of storm sewers to prevent the transmission of lime dust to ponds or receiving waters.
- Upon completion of mass grading, install sanitary and storm sewers and subsurface drains. As storm sewers are constructed, install inlet protection measures. Install riprap upon completion of end section installation.
- Upon completion of storm sewer system, finish grade swales, apply permanent seed and erosion control blanket.
- Upon completion of storm sewer installation and inlet protection, proceed with street construction.
- Once pavement and curbs are in place, install curb inlet sediment barriers.
- Once inlet protection is in place, final grade all areas. Upon completion of all grading, verify depth of pond per plan requirement, drainage as needed.

B3 Stable construction entrance location(s) and specifications: See Stormwater Pollution Prevention Plan Sheets C104 for location and Sheet C802 for construction entrance details and specifications. See B14 on this sheet for mulching and maintenance guidelines.

B4 Sediment control measures for sheet flow areas: See Stormwater Pollution Prevention Plan Sheets C104 for locations of sediment control measures and Sheet C802 for construction details and specifications.

B5 Sediment control measures for concentrated flow areas: See Stormwater Pollution Prevention Plan Sheets C104 for locations of sediment control measures and Sheet C802 for construction details and specifications.

B6 Storm sewer inlet protection measures, locations and specifications: See Stormwater Pollution Prevention Plan Sheet C104 for locations of inlet protection measures and Sheet C802 for construction details and specifications.

B7 Runoff control measures: None needed as this section has been previously mass graded and only fine grading for swales and final street grades will be needed to be done.

B8 Stormwater outlet protection specifications: See Storm Pollution Prevention Plan Sheet C104 for location of outlet protection measures and Sheet C803 for construction details and specifications.

B9 Grade stabilization structure locations and specifications: None are required.

B10 Location, dimensions, specifications and construction details of each stormwater quality measure: See Stormwater Pollution Prevention Plan Sheets C104 for locations of various stormwater quality measures and Sheet C802 for construction details and specifications. Also see Sheet C101 for location of water quality structure AS-2 and Sheet C803 for construction details and specifications.

B11 Temporary surface stabilization methods appropriate for each season: See Stormwater Pollution Prevention Plan Sheets C104 for locations of temporary surface stabilization measures and Sheet C802 for construction details and specifications.

B12 Permanent surface stabilization specifications: See Stormwater Pollution Prevention Plan Sheets C104 for locations of permanent surface stabilization measures and Sheet C802 for construction details and specifications.

B13 Material handling and spill prevention plan:  
**Purpose:**  
 The intention of this Spill Prevention, Control and Countermeasures (SPCC) is to establish the procedures and equipment required to prevent the discharge of oil and hazardous substances in quantities that violate applicable water quality standards, cause a sheen upon or discoloration of the surface of navigable waters or adjoining shorelines, or cause a sludge or emulsion to be deposited beneath the surface of the water or adjoining shorelines. The Plan also establishes the activities required to mitigate such discharges (i.e., countermeasures) which occur.  
**Definitions:**  
 Pollutant: means pollutant of any kind or in any form, including but not limited to sediment, paint, cleaning agents, concrete washout, pesticides, nutrients, trash, hydraulic fluids, fuel oil, petroleum, fuel oil, sludge, oil residue, and oil mixed with water other than dredged soil.  
**Discharge:**  
 Includes but is not limited to, any spilling, leaking, pumping, pouring, emitting, emptying, or dumping.  
**Navigable Waters:**  
 Means all waters of the United States that are connected with a navigable stream, lake, or sea. (Note: This definition is usually interpreted to mean any wastewater (even normally dry wash or storm sewer) that eventually drains into a navigable stream)  
**Plan Review and Amendments:**  
 This Plan shall be revised and/or amended, if necessary, whenever there is a change in the design of the site, construction, operation, or maintenance which materially affects the site's potential for the discharge of regulated material.  
**Prohibition of Potential Spills:**  
 1. Nearest Navigable Water: Hurricane Creek  
 2. Drainage System: All storm drainage leaves the site by open ditches and closed storm systems to the east to Hurricane Creek.  
 3. Possible Spill Sources (During and post construction): Vehicular sources such as leaking fuel or oil, brake fluid, grease, antifreeze, construction trash and debris, biological agents found in trash and debris, fertilizers, household items including but not limited to cleaning agents, chemicals, paint, herbicides and pesticides.  
 4. Groundwater Contamination:  
 The facility maintains NO above ground or under ground storage tanks at this site. Therefore, it is felt that there is little or no possibility of post construction groundwater contamination. The facility does how city sanitary sewer and city water.

**Alert Procedures for Spills:**

- Any personnel observing a spill will immediately instigate the following procedure:
  - Dialing "0" from any telephone.
  - Notify the appropriate emergency personnel.
- The Emergency Coordinator will then take the following actions:
  - Barriade the area allowing no vehicles to enter or leave the spill zone.
  - Notify the Indiana Department of Environmental Management, Office of Emergency Response by calling the appropriate telephone number:
    - Office: 317-233-7745
    - Toll Free: 800-233-7745
    - Also the National Response Center at 800-424-8802
  - Also the National Response Center at 800-424-8802
  - Provide the following information:
    - Time of observation of the spill
    - Location of the spill
    - Identify material spilled
    - Probable source of the spill
    - Probable time of the spill
    - Volume of the spill and duration
    - Present and anticipated movement of the spill
    - Weather conditions
    - Personnel at the scene
    - Action initiated by personnel
  - Notify the Greenwood Fire Department: Phone: 9-1-1
  - Notify the Greenwood Police Department: Phone: 9-1-1
  - Notify waste recovery contractor, maintenance personnel or other contractual personnel as necessary for cleanup.
  - Coordinate and monitor cleanup until the situation has been stabilized and all spills have been eliminated.
  - Cooperate with the IDEM-OR on procedures and reports involved with the event.

**Cleanup Parameters:**

- The Developer / Homeowner Association shall be continually kept informed, maintain lists of qualified contractors and available 100-trucks, tank pumps and other equipment readily accessible for clean-up operations. In addition, a continually updated list of available absorbent materials and clean-up supplies shall be kept on site.
- All maintenance personnel will be made aware of techniques for prevention of spills. They will be informed of the requirements and procedures outlined in this plan. They will be kept abreast of current developments or new information on the prevention of spills and/or necessary alterations to this plan.
- When spills occur which could endanger human life and this becomes primary concern, the discharge of the life saving procedure will be carried out by the local police and fire departments.
- Absorbent materials, which are used in cleaning up spilled materials, will be disposed of in a manner subject to the approval of the Indiana Department of Environmental Management.
- Flushing of spilled material with water will not be permitted unless so authorized by the Indiana Department of Environmental Management.

**Silt Fence Maintenance Requirements:**

- Inspect the silt fence periodically and after each storm event.
- If fence fabric tears, starts to decompose or in any way becomes ineffective, replace the affected portion immediately.
- Remove deposited sediment when it reaches half the height of the fence at its lowest point or is causing the fabric to bulge.
- Take care to avoid undermining the fence during cleanup.
- After the contributing drainage area has been stabilized, remove the fence and sediment deposits, bring the disturbed area to grade and stabilize it.

**Temporary Sediment Trap Maintenance Requirements:**

- Inspect temporary sediment traps after each storm event and immediately repair any erosion and piping holes.
- Remove sediment when it has accumulated to one-half the design depth.
- Replace siltway grass seeding when stopped.
- Inspect vegetation and re-seed if necessary.
- Check the spillway depth periodically to insure a minimum of 1.5 ft depth from the lowest point of the settled equipment to highest point of the spillway crest and fill any low areas to maintain design depth.
- Promptly replace any displaced rip-rap, being careful that no stones in the spillway are above design grade.
- After all disturbed areas have been stabilized, remove the structure and sediment, smooth the site to blend with adjoining areas and stabilize it.

**Sanitary and Storm Drainage Maintenance Requirements:**

- Inspect frequently for damage by vehicular traffic and repair if necessary.
- Inspect after each storm event.
- Remove sediment, without flushing, when it reaches half the height of the barrier.
- Deposit removed sediment where it will not enter storm sewer drains.

**Erosion Control Blanket (Surface Applied) Maintenance Requirements:**

- During vegetative establishment, inspect after each storm event for any erosion below the blanket.
- If any area(s) shows erosion, pull back that portion of the blanket covering it, re-seed the area and re-apply and single the blanket.
- After vegetative establishment check the treated area periodically.

**Temporary Construction Entrance Maintenance Requirements:**

- Inspect entrance pad and sediment disposal area weekly and after storm events or heavy use as needed.
- Reshape as needed for drainage and runoff control.
- Topdress with clean stone as needed.
- Immediately remove mud and sediment tracked or washed onto streets by brushing or sweeping. Flushing should only be used if the water is conveyed into a sediment trap or bank.
- Repair any broken road pavement immediately.

**Erosion & Sediment Control Specifications for Individual Building Lots:**

See Sheet C802 for Construction details and specifications for erosion & sediment control on individual building lots.

**ADDITIONAL STORMWATER POLLUTION PREVENTION MEASURES**

**VEHICLE & EQUIPMENT MAINTENANCE**

**Description and Purpose**  
 Present or reduce the contamination of stormwater resulting from vehicle and equipment maintenance by running a "dry and clean site". The best option would be to perform maintenance activities at an offsite facility. If this option is not available then work should be performed in designated areas only, including providing cover for materials stored outside, checking for leaks and spills, and containing and cleaning up spills immediately.

**Suitable Applications**  
 These procedures are suitable on all construction projects where an onsite yard area is necessary for storage and maintenance of heavy equipment and vehicles.

**Limitations**  
 Onsite vehicle and equipment maintenance should only be used where it is impractical to send vehicles and equipment offsite for maintenance and repair. Sending vehicles/equipment offsite should be done in conjunction with a Stabilized Construction Entrance/Exit. Outdoor vehicle or equipment maintenance is a potentially significant source of stormwater pollution. Activities that can contaminate stormwater include engine repair and service, changing or replacement of fluids, and outdoor equipment storage and parking (engine fluid leaks).

**Implementation**  
 If maintenance must occur onsite, use designated areas, located away from drainage courses. Dedicated maintenance areas should be protected from stormwater runoff and runoff, and should be located at least 50 ft from downstream drainage facilities and watercourses.

Drip pans or absorbent pads should be used during vehicle and equipment maintenance work that involves fluids, unless the maintenance work is performed over an impermeable surface in a dedicated maintenance area.

Litering on the project site should be prohibited.

To prevent clogging of the storm drainage system, litter and debris removal from drainage courses, trash and ditch lines should be a priority.

Trash receptacles should be provided in the contractor's yard, field trailer area, and at locations where workers congregate for lunch and break periods.

Litter from work areas within the construction limits of the project site should be collected and placed in watertight dumpsters at least weekly, regardless of whether the litter was generated by the contractor, the public, or others. Collected litter and debris should not be placed in or next to drain inlets, stormwater drainage systems, or watercourses.

Dumpsters of sufficient size and number should be provided to contain the solid waste generated by the project.

Full dumpsters should be removed from the project site and the contents should be disposed of by the trash hauling contractor.

Construction debris and waste should be removed from the site biweekly or more frequently as needed.

Drip pans or plastic sheeting should be placed under all vehicles and equipment placed on docks, bays, or other structures over water bodies when the vehicle or equipment is present to be idle for more than 1 hour.

Stormwater runoff should be prevented from contacting stored solid waste through the use of berms, dikes, or other temporary diversion structures or through the use of measures to elevate waste from site surfaces.

Solid waste storage areas should be located at least 50 ft from drainage facilities and watercourses and should not be located in areas prone to flooding or ponding.

**Inspection and Maintenance**  
 Inspect and verify that actively-based BMPs are in place prior to the commencement of associated activities. While activities associated with the BMP are under way, inspect weekly to verify continued BMP implementation.

Inspect BMPs subject to non-stormwater discharge daily while non-stormwater discharges occur.

Inspect construction waste area regularly.

Arrange for regular waste collection.

**Implementation**

The following steps will help keep a clean site and reduce stormwater pollution:  
 Select designated waste collection areas onsite.

Inform trash-hauling contractors that you will accept only watertight dumpsters for onsite use.

Inspect dumpsters for leaks and repair any dumpster that is not watertight.

Provide an adequate number of containers with lids or covers that can be placed over the container to keep rain out or to prevent loss of wastes when it is windy.

Plan for additional containers and more frequent pickup during the demolition phase of construction.

Collect site trash daily, especially during rainy and windy conditions.

Remove this solid waste promptly since erosion and sediment control devices tend to collect litter.

Make sure that toxic liquid wastes (used oils, solvents, and paints) and chemicals (acids, pesticides, adhesives, curing compounds) are not disposed of in dumpsters designated for construction debris.

Do not hose out dumpsters on the construction site. Leave dumpster cleaning to the trash hauling contractor.

Arrange for regular waste collection before containers overflow.

Clean up immediately if a container does spill.

Make sure that construction waste is collected, removed, and disposed of only at authorized disposal areas.

**Collection, Storage, and Disposal**  
 Littering on the project site should be prohibited.

To prevent clogging of the storm drainage system, litter and debris removal from drainage courses, trash and ditch lines should be a priority.

Trash receptacles should be provided in the contractor's yard, field trailer area, and at locations where workers congregate for lunch and break periods.

Litter from work areas within the construction limits of the project site should be collected and placed in watertight dumpsters at least weekly, regardless of whether the litter was generated by the contractor, the public, or others. Collected litter and debris should not be placed in or next to drain inlets, stormwater drainage systems, or watercourses.

Dumpsters of sufficient size and number should be provided to contain the solid waste generated by the project.

Full dumpsters should be removed from the project site and the contents should be disposed of by the trash hauling contractor.

Construction debris and waste should be removed from the site biweekly or more frequently as needed.

Drip pans or plastic sheeting should be placed under all vehicles and equipment placed on docks, bays, or other structures over water bodies when the vehicle or equipment is present to be idle for more than 1 hour.

Stormwater runoff should be prevented from contacting stored solid waste through the use of berms, dikes, or other temporary diversion structures or through the use of measures to elevate waste from site surfaces.

Solid waste storage areas should be located at least 50 ft from drainage facilities and watercourses and should not be located in areas prone to flooding or ponding.

**Inspection and Maintenance**  
 Inspect and verify that actively-based BMPs are in place prior to the commencement of associated activities. While activities associated with the BMP are under way, inspect weekly to verify continued BMP implementation.

Inspect BMPs subject to non-stormwater discharge daily while non-stormwater discharges occur.

Inspect construction waste area regularly.

Arrange for regular waste collection.

Inspect construction waste area regularly.

Arrange for regular waste collection.

Inspect construction waste area regularly.

Arrange for regular waste collection.

Inspect construction waste area regularly.

Arrange for regular waste collection.

Inspect construction waste area regularly.

Arrange for regular waste collection.

Inspect construction waste area regularly.

Arrange for regular waste collection.

Inspect construction waste area regularly.

Arrange for regular waste collection.

**Gravity Bag Filter**

Description:  
 A gravity bag filter, also referred to as a dewatering bag, is a square or rectangular bag made of non-woven geotextile fabric that collects sand, silt, and fines.

Appropriate Applications:  
 Effective for the removal of sediments (gravel, sand, and silt). Some metals are removed with the sediment.

Implementation:  
 Water is pumped into one side of the bag and seeps through the bottom and sides of the bag.

A secondary barrier, such as a rock filter bed or straw/hay bale barrier, is placed beneath and beyond the edges of the bag to capture sediments that escape the bag.

Maintenance:  
 Inspection of the flow conditions, bag condition, bag capacity, and the secondary barrier is required.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.


Replace the bag when it no longer filters sediment or passes water at a reasonable rate. The bag is disposed of offsite.

**DANDY DEWATERING BAG™ SPECIFICATIONS**

NOTE: THE DANDY DEWATERING BAG™ WILL BE MANUFACTURED IN THE U.S.A. FROM A NONWOVEN POLYPROPYLENE FABRIC THAT MEETS OR EXCEEDS THE FOLLOWING PERFORMANCE CHARACTERISTICS:

Mechanical Properties	Test Method	Units	MINIMUM
Grab Tensile Strength	ASTM D 4462	MPa (psi)	5.0 (725) x 6.0 (870)
Grab Tear Elongation	ASTM D 4462	%	80 x 80
Grab Tear Strength	ASTM D 4462	N (lb)	20 (4.5)
Median Burst Strength	ASTM D 3786	MPa (psi)	2610 (375)
Minimum Burst Strength	ASTM D 3786	MPa (psi)	2010 (290)
UV Resistance	ASTM D 4355	h	6,180 (60)
Minimum Storage Size	ASTM D 4462	Mm (in. Std. Size)	6,180 (60)
Flow Rate	ASTM D 4462	L/m <sup>2</sup> /min (gpm/100 ft <sup>2</sup> )	3660 (100)
Permeability	ASTM D 4462	cm/s	1.0

**DANDY DEWATERING BAG™**

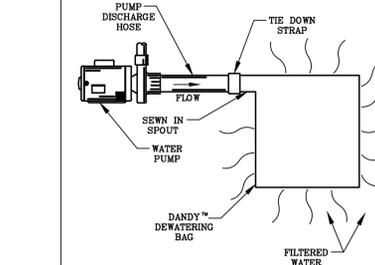

**DETAIL OF A DEWATERING BAG**

PROJECT:	DR. BY:
CITY/STATE:	DATE:
	DR. NO.:
	DR. DATE:

**EVALUATION FOR CONSTRUCTION PROJECTS**

A trained individual shall perform a written evaluation of the project site.  
 a. By the end of the next business day following each rainfall that exceeds 0.5"  
 b. A minimum of one (1) time per week

Project Name: \_\_\_\_\_ Date of Inspection: \_\_\_\_\_  
 Is this Evaluation following a rainfall: Yes \_\_\_ No \_\_\_ If yes, date the rain stopped: \_\_\_\_\_


No.	PROBLEM or CONCERN	YES	NO	N/A
1.	Is the site information posted at the entrance?			
2.	Are all necessary permits obtained and special provisions being implemented?			
3.	Is a construction entrance installed? Is it effective? Is it enough?			
4.	Public and private streets are clean?			
5.	Are appropriate practices installed where stormwater leaves the site?			
6.	Silt fence is entrenched into the ground?			
7.	Silt fence is upright? Fabric and stakes meet specifications? Fabric is not to torn? Terminated to higher ground? Property joined at ends?			
8.	Sediment basins and traps are installed according to the plan? The pipe or rock spillway is functioning?			
9.	The earthwork for erosion and sediment control practices is properly graded, seeded and/or mulched?			
10.	Diversions swales and/or waterbars are installed to plan and protected?			
11.	Perimeter practices have			

**SOILS LEGEND**


SOIL SERIES	DWELLINGS	ROADS	SEPTICS	HYDRIC	PONDS
Br	SEVERE: PONDING, WEETNESS, SHRINK-SWELL	SEVERE: LOW STRENGTH, FROST ACTION, PONDING	SEVERE: PONDING, WEETNESS, PERCS SLOWLY	Y	MODERATE: SEEPAGE
CrA	SEVERE: WEETNESS, PONDING	SEVERE: LOW STRENGTH, FROST ACTION	SEVERE: PERCS SLOWLY, WEETNESS	N	MODERATE: SEEPAGE
MnB2	MODERATE: WEETNESS, SHRINK-SWELL, WEETNESS	SEVERE: LOW STRENGTH, FROST ACTION	SEVERE: WEETNESS, PERCS SLOWLY	N	MODERATE: SEEPAGE
MnC2	MODERATE: WEETNESS, SHRINK-SWELL	SEVERE: LOW STRENGTH, FROST ACTION	SEVERE: WEETNESS, PERCS SLOWLY	N	SEVERE: SLOPE

Recommendations and methods to overcome soil limitations:

Limitations for local roads, streets and dwellings because of seasonal high water table and high potential frost action can be overcome by the use of curb underdrains, sub-base strengthening or lime stabilization. Swales which sever the surface drainage can also help. High water tables can be overcome with respect to basement construction with the use of perimeter foundation drains and sump pumps. Refer to the site construction drawings and details for specific information related to the proposed infrastructure improvements on this site.

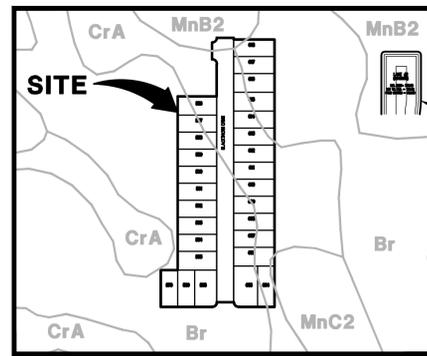


**SOILS MAP**  
SCALE: 1" = 250'

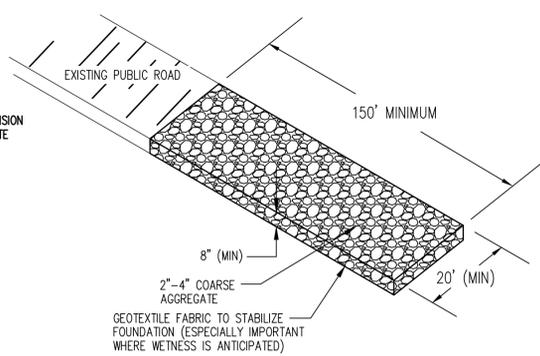


**TEMPORARY CONSTRUCTION ENTRANCE DETAIL**  
NOT TO SCALE


- NOTES:
- CONCRETE WASHOUT AREA SHALL BE INSTALLED PRIOR TO ANY CONCRETE PLACEMENT ON SITE.
  - SIGNS SHALL BE PLACED AT THE CONSTRUCTION ENTRANCE, AT THE WASHOUT AREA, AND ELSEWHERE AS NECESSARY TO CLEARLY INDICATE THE LOCATION OF THE CONCRETE WASHOUT AREA TO OPERATORS OF CONCRETE TRUCKS AND PUMP RIGS.
  - THE CONCRETE WASHOUT AREA SHALL BE REPAIRED AND ENLARGED OR CLEANED OUT AS NECESSARY TO MAINTAIN CAPACITY FOR WASTED CONCRETE.
  - AT THE END OF CONSTRUCTION, ALL CONCRETE SHALL BE REMOVED FROM THE SITE AND DISPOSED OF AT AN APPROVED WASTE SITE.
  - WHEN THE CONCRETE WASHOUT AREA IS REMOVED, THE DISTURBED AREA SHALL BE SEEDED AND MULCHED OR OTHERWISE STABILIZED IN A MANNER APPROVED BY THE INSPECTOR.

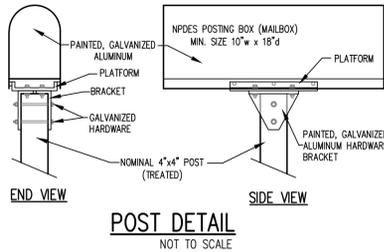


**POST DETAIL**  
NOT TO SCALE

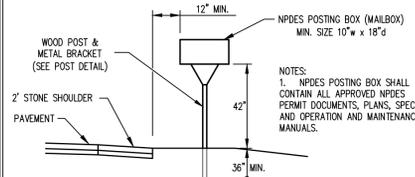


**NPDES SWP3 POSTING DETAIL**  
NOT TO SCALE

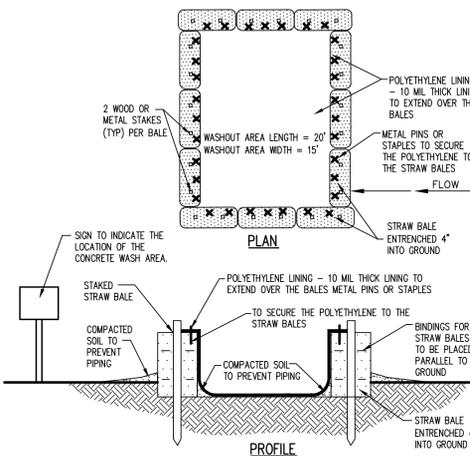



**ABOVE GROUND CONCRETE WASHOUT AREA**  
NOT TO SCALE

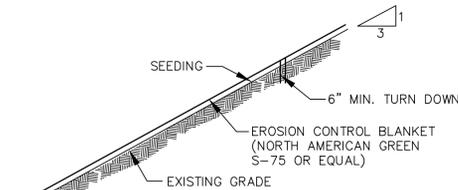


**EROSION CONTROL MATTING DETAIL**  
NO SCALE

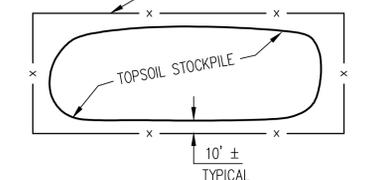

**TYPICAL TOPSOIL STOCKPILE**  
NOT TO SCALE

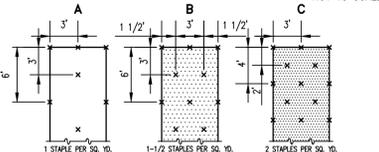

**CURB INLET PROTECTION**  
NO SCALE



**EROSION CONTROL MATTING DETAIL FOR REAR YARD SWALE**  
SCALE: NONE

**Seedbed Preparation**  
Apply lime to raise the pH to the level needed for species being seeded. Apply 23 pounds of 12-12-12 analysis fertilizer (or equivalent) per 1000 sq. ft. (approximately 1000 pounds per acre) or fertilizer according to test. Application of 150 lbs. of ammonium nitrate on areas low in organic matter and fertility will greatly enhance vegetative growth.

**Seeding**  
Work the fertilizer and lime into the soil to a depth of 2-3 inches with a harrow, disk or rake operated across the slope as much as possible.

Select a seed mixture based on projected use of the area (Figure 5-2), while considering best seeding dates. See Figure 5-3 this sheet. If tolerances are a problem, such as soil tolerance of seedings adjacent to streets and highways, see Figure 5-4 this sheet before final selection.

Figure 5-2: Permanent Seed Mixtures

Species	Seeding Rate lbs/acre	Sustainable pH	Site Suitability*		Wet
			Droughty	Well Drained	
<b>Level and Sloping, Open Areas</b>					
1. Tall Fescue	35	.8	5.5-8.3	2	1 2
2. Tall Fescue Red Clover**	25	.6	5.5-8.3	1	1
3. Kentucky Bluegrass	15	.4	5.5-7.5	2	1
Creeping Red Fescue	15	.4			
<b>Steep Banks and Cuts</b>					
4. Tall Fescue	15	.4	5.8-7.5	2	1 2
Kentucky Bluegrass	25	.6			
5. Tall Fescue	35	.8	5.5-8.3	2	1
Emerald Crownvetch**	10	.25			
<b>Lawns and High Maintenance Areas</b>					
6. Kentucky Bluegrass	40	.9	5.8-7.5	2	1
Creeping Red Fescue	40	.9			
7. Perennial Ryegrass (Turf Type)	170	4.0	5.0-7.5	1	
8. Tall Fescue	170	4.0	5.5-8.3	2	1 2

\* 1 - Preferred 2 - Will Tolerate \*\* Inoculate with specific Inoculant.

NOTE: PERMANENT SEEDING TO BE MULCHED WITH STRAW OR HAY AT THE RATE OF 2 TONS/ACRE, SPREAD UNIFORMLY BY HAND OR MACHINE, AND CRIMPED OR PUNCHED 2"-4" INTO THE SOIL. AFTER SPREADING, NO MORE THAN 25% OF THE GROUND SEEDED SHOULD BE VISIBLE.

Temporary Seeding Dates

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Wheat or Rye												
Oats												
Annual Ryegrass												
<b>Permanent Seeding Dates</b>												
Native Seed												
Non-irrigated*												
Irrigated												
Dormant Seeding**												

Irrigation needed during this period. To control erosion at times other than in the shaded areas, use mulch.  
\* Late summer seeding dates may be extended 5 days if mulch is applied.

\*\* Note: If temporary stabilization must occur during the winter straw mulch applied at a rate of 2 tons per acre and crimped in will be an acceptable cover.

Temporary Seed Application Rates

Kind of Seed	1000 Sq. Ft.	Acre	Remarks
Wheat or Rye	3.5 lbs.	150 lbs.	Cover seed 1" to 1 1/2" deep
Spring Oats	2.3 lbs.	100 lbs.	Cover seed 1" deep
Annual ryegrass	1.0 lb.	40 lbs.	Cover seed 1/4" deep*

\* Not necessary where mulch is applied.  
NOTE: TEMPORARY SEEDING TO BE MULCHED WITH STRAW OR HAY AT THE RATE OF 2 TONS/ACRE, SPREAD UNIFORMLY BY HAND OR MACHINE, AND CRIMPED OR PUNCHED 2"-4" INTO THE SOIL. AFTER SPREADING, NO MORE THAN 25% OF THE GROUND SEEDED SHOULD BE VISIBLE.




**SILT FENCE**


Silt Fence shall be a machine produced, woven geotextile fabric.

All stakes shall be 2" x 2" hardwood 36" (MIN.) tall with 24" tall staked to stakes over fabric as reinforcement.

Textile Strength @ 20% elongation..... 30 lbs. per linear inch  
UV Resistance ..... > 70 %  
Filtering efficiency..... 85%  
Slurry Flow Rate..... 0.3 gpm/sq. ft.  
Water Flow Rate..... 15 gpm/square ft.




**SILT FENCE JOINT WRAP DETAIL**

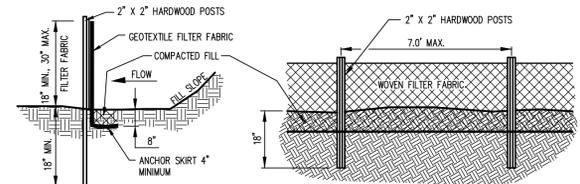


**GENERAL NOTES:**

1. FILTER FABRIC SHALL BE A MINIMUM OF 36" IN WIDTH.
2. TURN SILT FENCE UP SLOPE AT ENDS.

**TEMPORARY SILT FENCE**  
NOT TO SCALE



**BEEHIVE INLET PROTECTION**  
NOT TO SCALE



STAPLE PATTERNS APPLY TO ALL NORTH AMERICAN EROSION CONTROL BLANKETS. STAPLE PATTERNS MAY VARY DEPENDING UPON SOIL TYPE AND AVERAGE ANNUAL RAINFALL. AT SLOPE LENGTHS GREATER THAN 300 FEET OR WHERE DRAINAGE OVER LARGE AREAS IS DIRECTED ONTO THE BLANKETS, STAPLE PATTERN "C" SHOULD BE UTILIZED.

1. THE EDGES OF THE BLANKET SHOULD BE BUTTED AGAINST EACH OTHER. THE EDGES OF THE SECTIONS SHOULD BE OVERLAPPED 2".
2. ON SLOPE APPLICATIONS, THE TOP OF THE BLANKET SHOULD BE "SLOTTED" BY ABOVE THE BEAM OF THE SLOPE OR AT A MINIMUM STAPLES IN PLACE WITH STAPLES 8" APART ON THE END OF THE BLANKET.

3. THE BLANKET SHOULD NOT BE STRETCHED BUT ALLOWED TO LAY LOOSELY ON THE SOIL SURFACE TO ACHIEVE MAXIMUM CONTACT TO SOIL CONTACT.
4. ON LONG SLOPES, THE ENDS OF THE BLANKETS SHOULD BE OVERLAPPED 4' - 6' IN A "SHINGLE EFFECT".


5. IN HIGH VELOCITY CHANNEL APPLICATIONS, CHECK SLOTS SHOULD BE ESTABLISHED EVERY 35' - 40'. THE SLOTS SHOULD BE 6" WIDE BY 6" DEEP WITH THE BLANKET STAPLED TO THE BOTTOM OF THE SLOT. THEN SHOULDERED AND SEEDED.
6. PREPARATION OF THE SEED BED, INCLUDING APPLICATION OF LIME, FERTILIZER AND SEED SHOULD BE CONSIDERED AS NORMAL PRACTICE PRIOR TO INSTALLATION OF BLANKET.
7. ROLL BLANKETS OUT IN DIRECTION OF WATER FLOW.



**EROSION BLANKET INSTALLATION**  
NOT TO SCALE

**STORMWATER POLLUTION PREVENTION SCHEDULE**

EROSION CONTROL MEASURE	MAINTENANCE	INSTALLATION SEQUENCE
TEMP. DIVERSION SWALE & SILT TRAPS	AS NEEDED	PRIOR TO CLEARING AND GRADING
STONE ENTRANCE	AS NEEDED	PRIOR TO CLEARING AND GRADING
SILT FENCE	WEEKLY, AFTER STORM EVENTS AND AS NEEDED	PRIOR TO CLEARING AND GRADING
EXISTING INLET PROTECTION	WEEKLY, AFTER STORM EVENTS AND AS NEEDED	PRIOR TO CLEARING AND GRADING
TREE PROTECTION	WEEKLY, AFTER STORM EVENTS AND AS NEEDED	PRIOR TO CLEARING AND GRADING
TEMPORARY DIVERSIONS	WEEKLY, AFTER STORM EVENTS AND AS NEEDED	ALONG WITH ROUGH GRADING
TEMPORARY SEEDING WITH MULCH	WATER AS NEEDED	AFTER ROUGH GRADING
PERMANENT SEEDING WITH MULCH	WATER AS NEEDED	AFTER FINISH GRADING
EROSION CONTROL MATTING	WEEKLY, AFTER STORM EVENTS AND AS NEEDED	AFTER FINISH GRADING
INLET PROTECTION	WEEKLY, AFTER STORM EVENTS AND AS NEEDED	AFTER EACH INLET IS PLACED
SEED, SOD & LANDSCAPE AROUND UNITS FINISHED	WATER AS NEEDED	AFTER FINISHED GRADING AROUND FINISHED UNITS
REMOVAL OF INLET PROTECTION	N/A	AFTER ALL AREAS DRAINING TO THESE AREAS ARE STABILIZED
REMOVAL OF SILT FENCE	N/A	AFTER ALL AREAS DRAINING TO THESE AREAS ARE STABILIZED

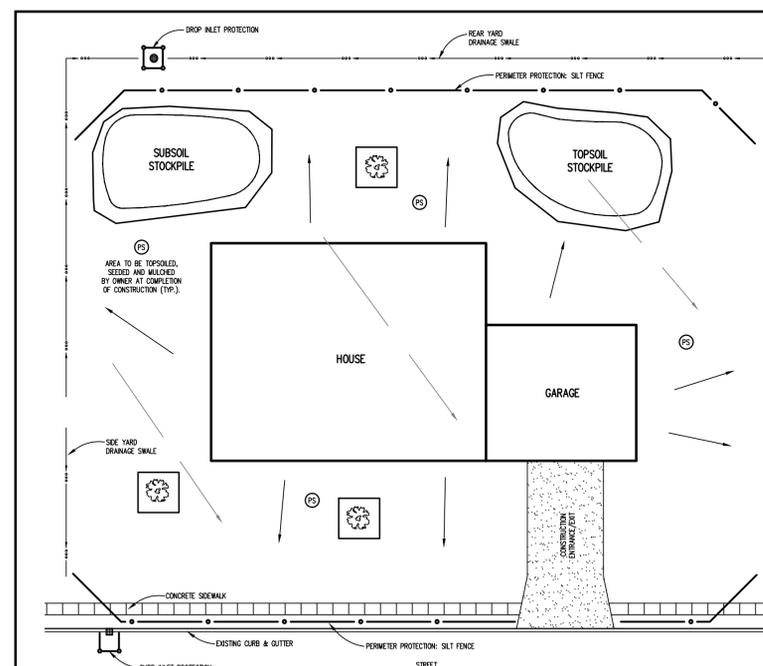

**SAMPLE EROSION/SEDIMENT CONTROL PRACTICE PLAN FOR A TYPICAL ONE- OR TWO-FAMILY DWELLING UNDER CONSTRUCTION**  
SCALE: NONE

**INDIVIDUAL LOT EROSION CONTROL PLAN LEGEND**

PROPERTY LINE/ DRAINAGE SWALE	DROP INLET PROTECTION
SILT FENCE	SOIL SALVAGE AND UTILIZATION
FINISHED DRAINAGE	PERMANENT SEEDING
EXISTING DRAINAGE	CURB INLET PROTECTION
TREE CONSERVATION	
GRAVEL ENTRANCE/ EXIT PAD	

**PROVISIONS FOR EROSION AND SEDIMENT CONTROL ON INDIVIDUAL BUILDING LOTS:**

1. The individual lot operator, whether owning the property or acting as the agent of the property owner, shall be responsible for erosion and sediment control requirements associated with activities on individual lots.
2. Temporary seeded areas established by the developer shall be maintained by the homeowner and his sub-contractors. Silt fences previously installed will be maintained.
3. Installation and maintenance of a stable construction site access drive from the house/site to the street/alley shall be installed, consisting of Number 2 Stone, 6" thick and a minimum of 12' wide. Top dress as needed. This shall be utilized for access to the house and any mud or dirt tracked into the street/alley shall be promptly removed and placed in a stable area. Water shall not be used to flush silt, mud or debris into the storm sewer system.
4. Installation and maintenance of appropriate perimeter erosion and sediment control measures prior to land disturbance. A silt fence is to be installed along the back of cut at the front property line and along the alley or at the edge of the rear drainage easement. The silt fence shall be maintained until permanent vegetation (grass) is established.
5. Sediment discharge and tracking from each lot must be minimized throughout the land disturbing activities on the lot until permanent stabilization has been achieved.
6. Clean-up of sediment that is either tracked or washed onto roads. Bulk clearing of sediment shall not include flushing the area with water. Cleared sediment must be redistributed or disposed of in a manner that is in compliance with all applicable statutes and rules.
7. Adjacent lots disturbed by an individual lot operator must be repaired and stabilized with temporary or permanent surface stabilization.
8. When time is appropriate, and as soon as possible, roof down spout extenders of a non-perforated drain tile should be extended to the street or other solid outlet until a lawn is established.
9. For individual residential lots, final stabilization meeting the criteria of Rule 5 will be achieved when the individual lot operator:
  - a. Completes final stabilization on the entire lot, or
  - b. Individual lots may not be ultimately turned over to the homeowner without permanent stabilization in place.

REVISIONS:

**TODD C. WALLACE**  
REGISTERED PROFESSIONAL ENGINEER  
INDIANA  
STATE OF INDIANA  
NO. PE11011398  
DATE: 03/19/15

**Indiana 811**  
Know what's below. Call before you dig.

THIS DRAWING AND THE IDEAS, DESIGNS AND CONCEPTS CONTAINED HEREIN ARE THE EXCLUSIVE INTELLECTUAL PROPERTY OF THE SCHNEIDER CORPORATION AND ARE NOT TO BE USED OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE WRITTEN CONSENT OF THE SCHNEIDER CORPORATION.  
© COPYRIGHTED BY THE SCHNEIDER CORP. (2015)

**Schneider**

THE SCHNEIDER CORPORATION  
8001 Arrowridge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com

Civil Engineering  
GIS + LIS  
Land Surveying  
Landscape Architecture

**HERITAGE, SECTION 6**

**CITY OF FRANKLIN, JOHNSON COUNTY**


**ARBOR INVESTMENTS, LLC**  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015 PROJECT NO: 4569.600  
DRAWN BY: BDP CHECKED BY: TCW  
SHEET TITLE: STORMWATER POLLUTION PREVENTION DETAILS  
DRAWING FILES:  
T:\44\4569\600\dwg\C801-C802.dwg  
XREF: T:\44\4569\600\dwg\Arenokop.dwg  
XREF: T:\44\4569\600\dwg\4569600\_BS.dwg  
XREF: T:\44\4569\600\dwg\4569600\_Furure.dwg  
XREF: T:\44\4569\600\dwg\4569600\_Furure.dwg  
XREF: T:\44\4569\600\dwg\4569600.dwg  
XREF: T:\44\4569\600\dwg\4569600.dwg  
XREF: T:\44\4569\600\dwg\4569600.dwg


SHEET NO: **C802**



Plot Date: Mar 19, 2015 Plot Time: 12:19pm File Name: T:\4\4569\600\dwg\C803-C805.dwg, Layout: C804 By: bdp

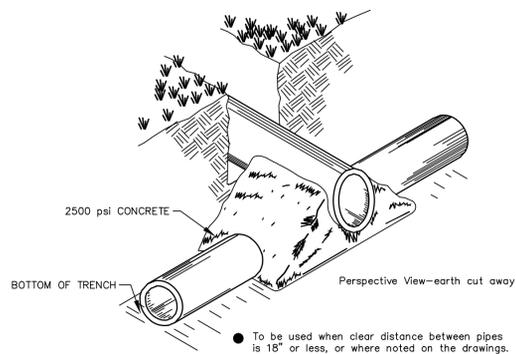


**CONCRETE CRADLE**  
NO SCALE

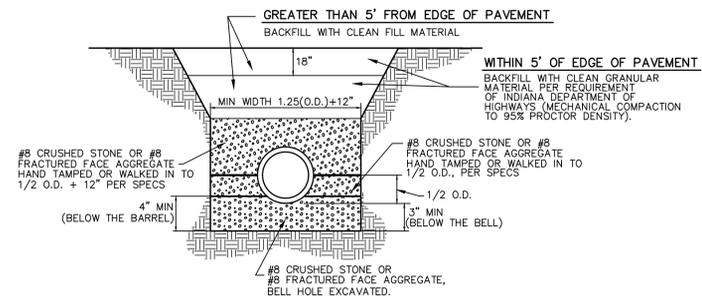


PIPE SIZE	8"-15"	18" & OVER
BEDDING BELOW THE PIPE BARREL	O.D./4 MIN=4"	O.D./4 MAX=8"

**SANITARY SEWER BEDDING DETAIL**  
PVC & HDPE PIPE NO SCALE

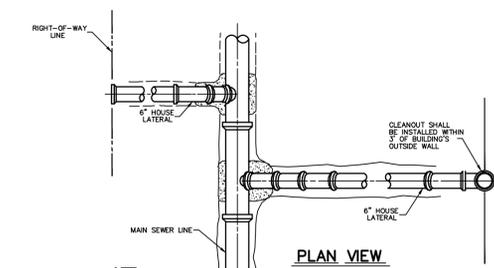


PLAN VIEW

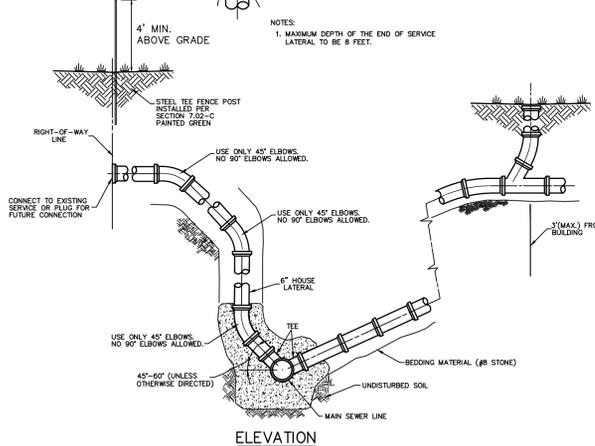


**SERVICE CONNECTION FOR DEEP SEWER**  
15' DEEP AND OVER

(FIGURE 7-5) NO SCALE

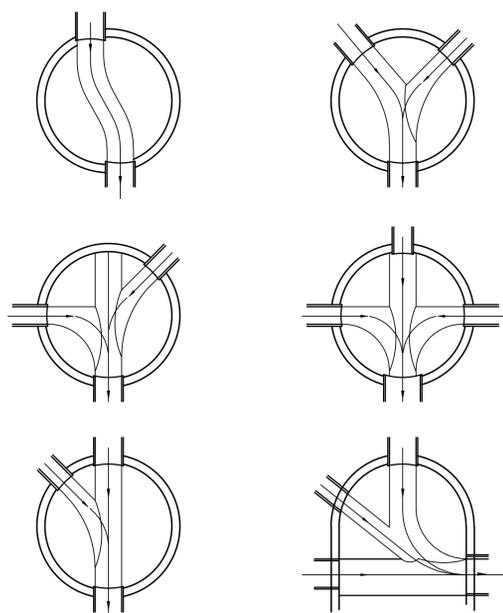


**TYPICAL UTILITY CROSSING**  
NO SCALE

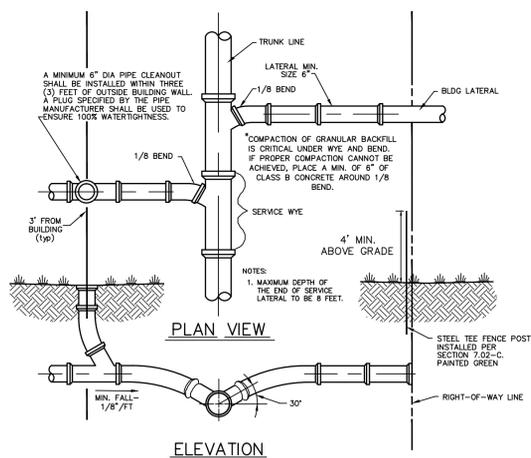

**SERVICE CONNECTION FOR SHALLOW SEWERS**  
LESS THAN 15' DEEP

(FIGURE 7-4) NO SCALE

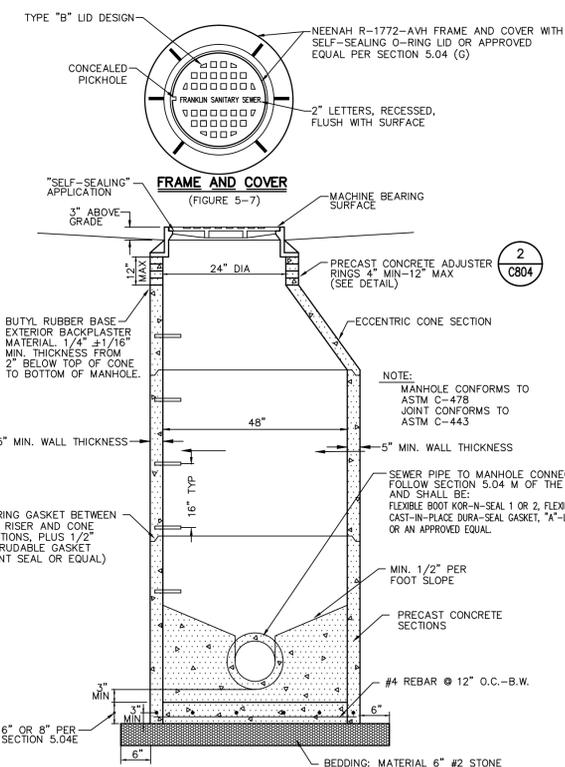

**PRECAST REINFORCED CONCRETE MANHOLE**  
NO SCALE

NOTE: MANHOLE SHALL INCLUDE STEPS. MANHOLE STEPS SHALL BE POLYPROPYLENE, POLYPROPYLENE COATED STEEL REINFORCING OR AN APPROVED NON-CORROSIVE FIBERGLASS MATERIAL. THE COPOLYMER POLYPROPYLENE SHALL MEET THE REQUIREMENTS OF ASTM D-4101 REINFORCED WITH DEFORMED 3/8" MIN. DIAMETER REINFORCING STEEL CONFORMING TO THE REQUIREMENTS OF ASTM A-615, GRADE 60. NON-COATED CAST IRON STEPS ARE NOT ACCEPTABLE. STEPS SHALL BE A MAXIMUM OF 24" FROM TOP, 24" FROM BOTTOM AND 16" SPACING BETWEEN.

REVISIONS:

**JOYD C. WALLACE**  
REGISTERED PROFESSIONAL ENGINEER  
NO. PE11011395  
STATE OF INDIANA  
DATE: 03/19/15  
THIS DRAWING AND THE IDEAS, DESIGNS AND CONCEPTS CONTAINED HEREIN ARE THE EXCLUSIVE INTELLECTUAL PROPERTY OF THE SCHNEIDER CORPORATION AND ARE NOT TO BE USED OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE WRITTEN CONSENT OF THE SCHNEIDER CORPORATION.  
© COPYRIGHTED BY THE SCHNEIDER CORP. (2015)

**Schneider**  
THE SCHNEIDER CORPORATION  
8001 Arrowridge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com



Civil Engineering  
GIS \* LIS  
Land Surveying  
Landscape Architecture

**HERITAGE, SECTION 6**  
**CITY OF FRANKLIN, JOHNSON COUNTY**  
**ARBOR INVESTMENTS, LLC**  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015 PROJECT NO: 4569.600  
DRAWN BY: BDP CHECKED BY: TCW  
SHEET TITLE: SANITARY SEWER DETAILS  
DRAWING FILES: T:\4\4569\600\dwg\C803-C805.dwg  
XREF: T:\4\4569\600\dwg\Title600.dwg  
SHEET NO: 1  
**C804**

STR #	B	Lo	W	THICKNESS	d <sub>50</sub>	SYDS
502	3.75'		11.75'	0.75"	6"	7

- NOTES:
1. GEOTEXTILE UNDERLAYMENT TO BE POLYFELT T5700 OR APPROVED EQUAL.
  2. MINIMUM RIPRAP THICKNESS = 12"

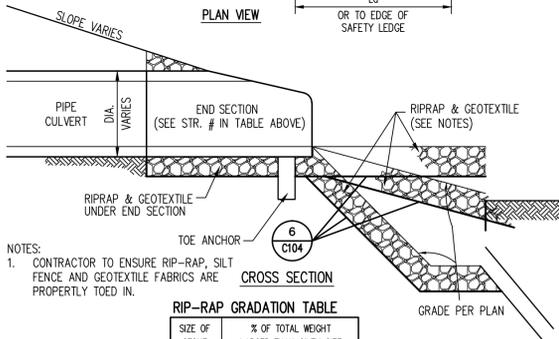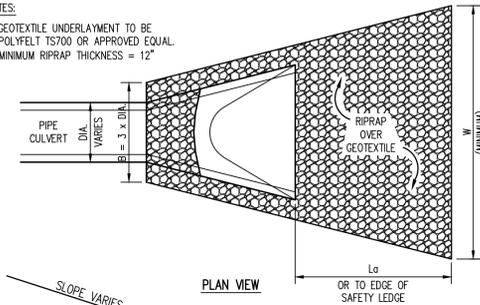



**RIP-RAP GRADATION TABLE**

SIZE OF STONE	% OF TOTAL WEIGHT LARGER THAN GIVEN SIZE
3K	0
2K	20
K	50
0.1K	90

WHERE K = 450  
NOTE: DEPTH OF RIP RAP SHALL NOT BE LESS THAN 3 x d<sub>50</sub>

**RIPRAP AT END SECTION**  
NOT TO SCALE

10  
C805

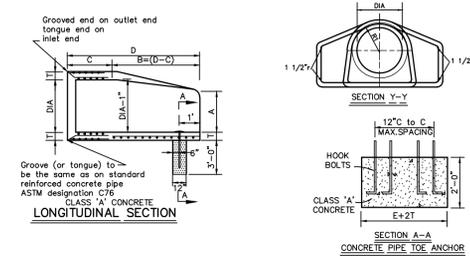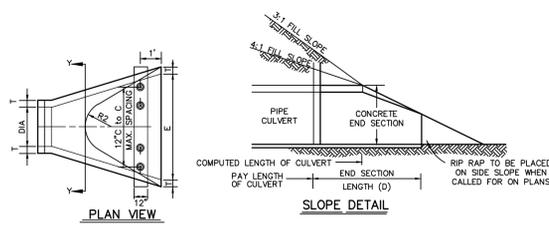


**DIMENSIONS OF CONCRETE END SECTIONS FOR ROUND PIPE**

DIA	T	A*	C*	D*	E*	K	R <sub>1</sub>	R <sub>2</sub>	APPROX. WEIGHT
12"	2"	5"	4'-3"	6'-2"	2'-0"	1.3	10 1/8"	9"	800
15"	2 1/4"	7"	4'-0"	6'-3"	2'-6"	1.5	12 1/2"	11"	1,100
18"	2 1/2"	11"	4'-1"	6'-2"	3'-0"	1.8	15 1/2"	12"	1,300
21"	2 3/4"	11"	3'-6"	6'-3"	3'-0"	2.1	16 1/8"	13"	1,500
24"	3"	1'-0"	2'-8"	6'-3"	4'-0"	2.3	16 3/16"	14"	1,800
27"	3 1/4"	1'-1"	2'-5"	6'-3"	4'-6"	2.6	18 1/2"	14 1/2"	2,100
30"	3 1/2"	1'-2"	1'-10"	6'-3"	5'-0"	2.9	18 3/16"	15"	2,400
33"	3 3/4"	1'-3"	3'-6"	6'-3"	5'-6"	3.1	18 1/2"	17 1/2"	4,100
36"	4"	1'-5"	3'-1"	6'-3"	6'-0"	3.4	23 3/4"	20"	4,200

\* TOLERANCE +/- 1"

**PRECAST CONCRETE END SECTION**  
NO SCALE

7  
C805

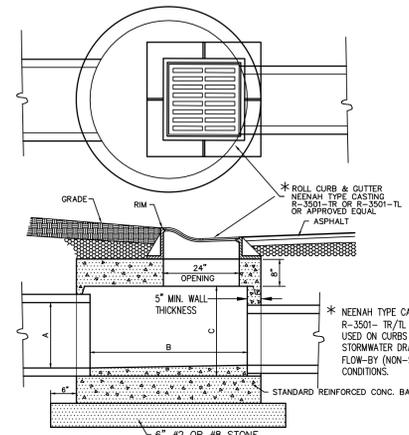


**DIMENSIONS (INCHES)**

A (MAX)	B (MIN)	C (MIN)
12	48	18
15	48	21
18	48	25
21	48	28
24	48	31
27	60	34
30	60	38
33	60	41
36	60	44
42	60	50

NOTE: STEPS SHALL BE PROVIDED IN ALL STRUCTURES 48" IN DIAMETER OR LARGER.

**SPECIAL ROLL CURB INLET**  
NO SCALE

4  
C805

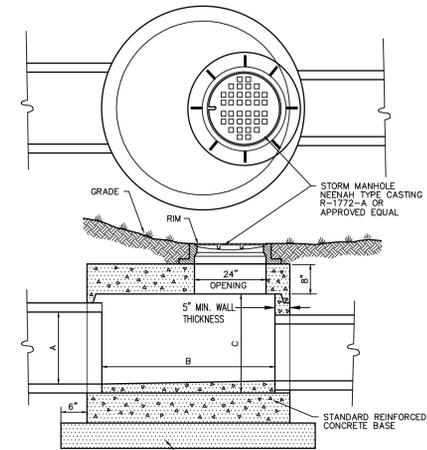


**DIMENSIONS (INCHES)**

A (MAX)	B (MIN)	C (MIN)
12	48	18
15	48	21
18	48	25
21	48	28
24	48	31
27	60	34
30	60	38
33	60	41
36	60	44
42	60	50

NOTE: STEPS SHALL BE PROVIDED IN ALL STRUCTURES 48" IN DIAMETER OR LARGER.


**MANHOLE DETAIL**  
NO SCALE

3  
C805

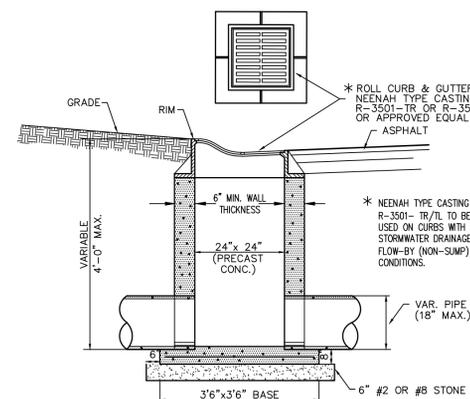


**ROLL CURB INLET**  
NO SCALE

6  
C805

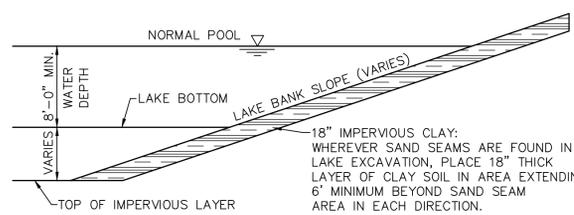


**SPECIAL SLOPE TREATMENT (IN AREAS OF SAND SEAMS)**  
NO SCALE

9  
C805




**TYPICAL SWALE SECTION**  
NO SCALE

8  
C805

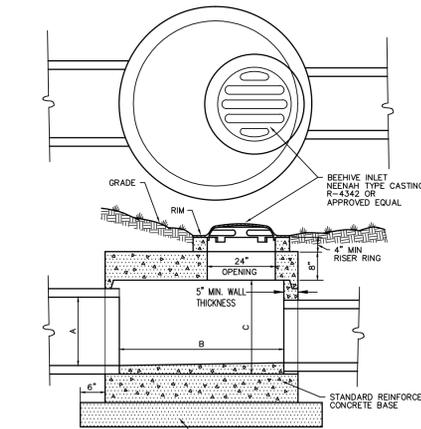


**BEEHIVE INLET DETAIL**  
NO SCALE

5  
C805

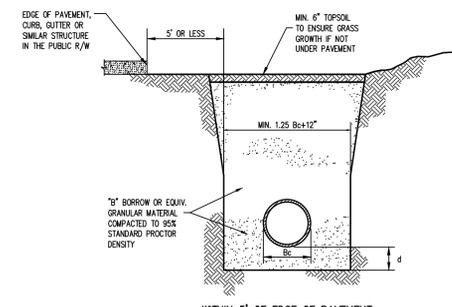

**TRENCH DETAIL**  
NO SCALE

1  
C805

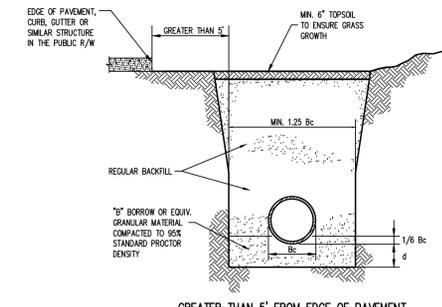

**TRENCH DETAIL**  
NO SCALE

1  
C805

REVISIONS:

**JOYD C. WALLACE**  
REGISTERED PROFESSIONAL ENGINEER  
INDIANA  
No. PE11011389  
STATE OF INDIANA  
DATE: 03/19/15  
THIS DRAWING AND THE IDEAS, DESIGNS AND CONCEPTS CONTAINED HEREIN ARE THE EXCLUSIVE INTELLECTUAL PROPERTY OF THE SCHNEIDER CORPORATION AND ARE NOT TO BE USED OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE WRITTEN CONSENT OF THE SCHNEIDER CORPORATION.  
© COPYRIGHTED BY THE SCHNEIDER CORP. (2015)

**Schneider**  
THE SCHNEIDER CORPORATION  
8001 Arrowridge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com

Civil Engineering  
GIS + LIS  
Land Surveying  
Landscape Architecture

**HERITAGE, SECTION 6**  
CITY OF FRANKLIN, JOHNSON COUNTY  
ARBOR INVESTMENTS, LLC  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015 PROJECT NO: 4569.600  
DRAWN BY: BDP CHECKED BY: TCW  
SHEET TITLE: STORM SEWER DETAILS  
DRAWING FILES: T:\44\4569\600\dwg\C803-C805.dwg  
XREF: T:\44\4569\600\dwg\Title600.dwg  
SHEET NO.: C805

EARTHWORK

1. SCOPE OF WORK

A. Extent: The work required under this section consists of all excavating, filling, rough grading and related items necessary to complete the work indicated on the drawings and described in the specifications. The Contractor shall notify in writing the owners and the Engineer of any changes, errors, or omissions found on the plans or in the field, before work is started or resumed.

- 1. In general, the items of work to be performed under this section shall include: clearing and grubbing, removal of trees and stumps (where required), protection of trees to remain, stripping and storage of topsoil, fill compaction and rough grading of entire site.
2. Excavated material that is suitable may be used for fills. All unsuitable material and all surplus excavated material not required shall be removed from the site. The location of dump and length of haul shall be the Contractor's responsibility.

3. Provide and place any additional fill material from off the site as may be necessary to produce the grades required. Fill obtained from off site shall be of kind and quality as specified for fills herein and the source approved by the Owner.

4. The Contractor shall accept the site as he finds it and shall remove all trash, rubbish and debris from the site prior to starting excavation.

B. Work not included: The following items of related work are specified and included in other sections of these specifications:

- 1. Excavation, grading and backfilling for utility lines
2. Storm drainage systems
3. Sanitary sewer systems
4. Streets and paving
5. Water supply system

2. BENCH MARKS

Maintain carefully all bench marks, monuments and other reference points; if disturbed or destroyed, contractor shall contact engineer.

3. REMOVAL OF TREES

- A. Remove all trees and stumps from area to be occupied by road and surfaced areas. Removal of trees outside these areas shall only be done as noted on drawings or approved by the Owner.
B. All brush, stumps, wood and other refuse from the trees shall be buried onsite or removed to disposal areas off of the site. Disposal by burning shall not be permitted unless proper permits are obtained (where applicable). The location of on site bury pits shall be designated by the Owner or the Engineer.

4. PROTECTION OF TREES

A. General Protection: The Contractor shall be responsible for the protection of tops, trunks and roots of existing trees on the project site that are to remain. Existing trees subject to construction damage shall be boxed, fenced or otherwise protected before any work is started; do not stockpile within branch spread. Remove interfering branches without injury to trunks and cover scars with tree paint.

5. HANDLING OF TOPSOIL

- A. Remove all organic material from the areas to be occupied by buildings, roads, walks and parking areas. Pile and store topsoil at a location where it will not interfere with construction operations. Topsoil shall be reasonably free from subsoil, debris, weeds, grass, stones, etc.
B. After completion of site grading and subsurface utility installation, top soil shall be replaced in areas designated on the erosion control plan for seeding and/or sodding. Any remaining top soil shall be used for finished grading around structures and landscaping areas.

6. DISPOSITION OF UTILITIES:

- A. Rules and regulations governing the respective utilities shall be observed in executing all work under this section.
B. If active utilities are encountered but not shown on the drawings, the Engineer shall be advised before work is continued.
C. Inactive and abandoned utilities encountered in excavating and grading operations shall be reported to the Engineer. They shall be removed, plugged or capped as directed by the Utility Company or the Engineer.
D. It shall be the responsibility of each contractor to verify all existing utilities and conditions pertaining to his phase of the work. It shall also be the contractor's responsibility to contact the owners of the various utilities before work is started.

7. SITE GRADING:

- A. Grades: Contractor shall perform all cutting, filling, compacting of fills and rough grading required to bring entire project area to grade as shown on the drawings.
B. Rough Grading: the tolerance for paved areas shall not exceed 0.10 feet plus or minus above the established subgrade. All other areas shall not exceed 0.10 feet plus or minus the established grade. All banks and other breaks in grade shall be rounded at top and bottom.
C. Compaction Requirements:
1. All areas under building pads shall be compacted to 95% of standard proctor density.
2. All areas under pavements shall be compacted to 95% of standard proctor density.
3. All other fill areas shall be compacted to 85% of standard proctor density.

8. Earth Work Balance

The Contractor shall confirm all earthwork quantities prior to start of construction. If an excess or shortage of earth is encountered, the Contractor shall confirm with the Owner and Engineer the requirements for stockpiling, removal or importing of earth.

Minor adjustments to the grades may be required to earthwork balances when minor excess material or shortages are encountered. It is recognized by the parties hereto that the calculations of the Engineer in determining earthwork quantities shall be accomplished in accordance with the American Society of Civil Engineers Standards for such calculations. Further, that these calculations are subject to the interpretations of soil borings as the physical limits of the various soil types, also the allowable variation in finish grading and compaction permitted the contractor, and that all of these parameters may cause either an excess or shortage of actual earthwork materials to complete the project. If such an actual minor excess or shortage of materials occurs, the contractor shall contact the engineer to determine if adjustment can be made to correct the imbalance of earth.

SANITARY SEWER SYSTEMS

1. SCOPE OF WORK

The work under this section includes all sanitary sewers, manholes, cleanouts and related items including excavating and backfilling, necessary to complete the work shown in the drawings, starting three feet outside the building walls. The ends of sewers shall be tightly plugged or capped at the terminal points, adjacent to buildings, pending the connecting of all such lines to the building drain as specified in the plumbing specifications and architectural drawings.

2. MATERIALS

- A. Sanitary Sewers
1. P.V.C. Pipe diameters of 4 inches through 15 inches shall meet or exceed all the requirements of ASTM D-3034, and shall have a cell classification of 12454-B, 12454-C, 12364-C or 13364-B. Reference should be made to ASTM D-1784 for a summarization of cell class properties. P.V.C. Pipe diameters greater than 15 inches shall meet or exceed all requirements of ASTM F-679, and shall have a minimum cell classification of 12454-C or 12364-C.
2. When the depth of soil cover over the pipe is less than 12 feet, the minimum wall thickness of P.V.C. pipe, 6 inches through 15 inches in diameter, shall conform to SDR-35, Type PSM, as specified in ASTM D-3034 (see note 5 for fittings). When the depth of soil cover over the pipe is 12 feet or greater, the minimum wall thickness 6 inches through 15 inches in diameter, shall conform to SDR-26, Type PSM, as specified in ASTM D-3034. The minimum wall thickness for P.V.C. pipe greater than 15 inches shall conform to T-1 or T-2, as specified in ASTM F-679. P.V.C. SDR-35 pipe shall have a minimum pipe stiffness of 46 pounds per square inch for each diameter when measured at five percent deflection and tested in accordance with ASTM D-2412. P.V.C. SDR-26 pipe shall have a minimum pipe stiffness of 115 pounds per square inch for each diameter when measured at five percent deflection and tested in accordance with ASTM D-2412.
3. The assembly of joints shall be in accordance with pipe manufacturers' recommendations and ASTM D-3212. Solvent Cement joints shall not be allowed for mainline pipe.
4. Pipe fittings shall be SDR-26 manufactured fittings made of P.V.C. plastic having a cell classification of 12454-B, 12454-C or 13343-C, as defined in ASTM D-1784. Saddle connections shall not be allowed for new construction. Lateral connections shall occur at SDR-26 Tee-Wyes.
5. In accordance with ASTM D-3034, the outside of each pipe section shall be legibly marked with the date of manufacture, class of pipe, specification designation, name or trademark of manufacturer and identification of plant/location.
6. Installation shall be in accordance with ASTM standard practice D-2321.
7. Ductile iron (DI) pipe must meet ANSI A21.51 and AWWA C151, latest revision and shall be Class 50. Fitting shall comply with ANSI A-21.10, AWWA C-110. Mechanical joints, slip or flanged joints shall be provided. Mechanical joints shall conform to AWWA C-111, ANSI A-21.11. The bolts and nuts shall be corrosion resistant high strength alloy steel. Flanged joints shall conform to AWWA C-115, ANSI A-21.15, Class 125. Slip joints gaskets shall conform to AWWA C-111, ANSI A-21.11.

B. Manholes

- 1. Precast reinforced concrete manhole sections and steps shall conform to ASTM C-478 latest revision. Exterior of manhole shall be waterproofed with Bismatic material.
2. Castings shall be of uniform quality, free from blow holes, porosity, hard spots, shrinkage, distortion or other defects. They shall be smooth and well-cleaned by shot-blasting or by some other approved method. They shall be gray iron meeting ASTM A-48 latest revision. Manhole covers for sanitary sewer shall be Neenah Type R-1772-AVH w/Self-Sealing O-Ring lid.
3. Joints - Manhole sections shall be joined with a nominal 1/2" size butyl rubber rubber base gasket material, conforming to AASHTO M-198 and Federal Specification SS-S-210a. Joint conforms to ASTM C-443.
4. Manholes shall include steps. Manhole steps are to be polypropylene, polypropylene coated steel reinforcing or an approved non-corrosive fiberglass material. The copolymer polypropylene shall meet the requirements of ASTM D-4101 reinforced with deformed 3/8" minimum diameter reinforcing steel conforming to the requirements of ASTM A-615, Grade 60. Steps shall be a maximum of 24" from top, 24" from bottom and 16" spacing between. Non-coated cast iron steps are not acceptable.
5. The proposed manholes shall be air tested in accordance with ASTM C1244-93, Standard Test Method for Concrete Sewer Manholes by Negative Air Pressure (Vacuum) Test.

3. APPLICATION

- A. Permits and Codes - The intent of this section of the specifications is that the contractor's bid on the work covered herein shall be based upon the drawings and specifications but that the work shall comply with all applicable codes and regulations as amended by any waivers. Contractor shall furnish all bonds necessary to get permits for cuts and connections to existing sewers.
B. Local Standards - The term "local standards" as used herein means the standards of design and construction of the respective municipal department or utility company.
C. Existing Improvements - Maintain in operating condition all active utilities, sewers and other drains encountered in the sewer installation. Repair to the satisfaction of the owner any damage to existing active improvements.
D. Workmanship - To conform to all local, state and national codes and to be approved by all local and state agencies having jurisdiction.
E. Trenching - Lay all pipe in open trenches, except when the local authority gives written permission for tunneling. Open the trench sufficiently ahead of pipe-laying to reveal any obstructions. The width of the trench shall be 1.25 times the outside pipe diameter plus 12 inches for 12 inches above the pipe. Sheet and brace trench as necessary to protect workmen and adjacent structures. All trenching to comply with Occupational Safety and Health Administration Standards. Keep trenches free from water while construction is in progress. Under no circumstances shall pipe or appurtenances be laid in standing water. Conduct the discharge from trench dewatering to drains or natural drainage channels.
F. Special Supports - Whenever, in the opinion of the Engineer, the soil at or below the pipe grade is unsuitable for supporting sewers and appurtenances specified in this section, such special support, in addition to those shown or specified, shall be provided as the Engineer may direct, and the contract will be adjusted.
G. Backfilling - for a depth of at least 12 inches above the top of the pipe, backfill with 12" of #8 crushed stone or #8 fractured face aggregate. Compact this backfill thoroughly, taking care not to disturb the pipe. For the remaining trench depth, backfill with earth or granular material containing stones or rocks not larger than 4 inches. Backfill under and within 5' of walks, parking areas, driveways and streets shall be granular material only - thoroughly compacted, by approved methods.
H. Flow Channels - The flow channels within manholes shall be an integral part of the precast base. The channels shall be shaped and formed for a clean transition with proper hydraulics to allow the smooth conveyance of flow through the manhole. The bench wall shall be formed to the crown of the inlet and outlet pipes to form a "U" shaped channel. The bench wall shall slope back from the crown at minimum 1/2 inch per foot to the manhole wall.

I. Infiltration - The contractor shall furnish necessary equipment to test sewers for infiltration. All sanitary sewer lines upon completion will be required to pass a low pressure air test, unless otherwise directed by the City of Franklin Department of Public Works. Said test shall be conducted according to ASTM F-1417-92 and per City of Franklin Department of Public Works Standards for Design and Construction of Sanitary Sewers, Section 9.03A, and shall be witnessed by an inspector authorized by the City of Franklin Department of Public Works. Infiltration under test shall not exceed 0 gallons.

J. Flushing Sewers - Flush all sanitary sewers except building sewers with water to obtain free flow through each line. Remove all silt and trash from appurtenances just prior to acceptance of work.

K. Plastic Sewer Pipe Installation - Plastic sewer pipe shall be installed in accordance with ASTM D2321 per latest revision and no plastic pipe shall exceed a deflection of 5%. This Mandrel test shall be per City of Franklin Department of Public Works Standards for Design and Construction of Sanitary Sewers, Section 9.03B.

L. Storm Water Connections - No roof drains, footing drains, sump pumps, and/or surface water drains may be connected to the sanitary sewer systems, including temporary connections during construction.


M. Waterline Crossing - Waterlines and sanitary sewers shall maintain a minimum of 10 foot horizontal separation and a minimum 18 inches of clearance between pipes at crossings for a distance of 10-feet. Otherwise, sanitary sewer shall meet the requirements for water works grade pipe, PVC SDR 21 pipe can be used.

N. Utilities - It shall be the responsibility of each contractor to verify all existing utilities and conditions pertaining to his phase of the work. It shall also be the contractor's responsibility to contact the owners of the various utilities before work is started. The contractor shall notify in writing the owners and the engineer of any changes, errors or omissions found on these plans or in the field before work is started or resumed.


O. Service Laterals - Individual lot service lines shall be 6" in diameter and of material equal to that specified in 2A of this section. Service lines shall be connected to the main sewer by a wye at locations generally shown within these plans. Service lines shall be extended to the Drainage, Utility & Sewer Easement at each lot, but in no case shall be closer than 7' to the pad/building line. Maximum depth of the end of service lines to be 8'. Sewer service lines shall be marked (stamped) on the curb with a "S". A Steel T fence post shall be installed at the end of each lateral a minimum of 4 feet above ground level and painted green.

P. New Sanitary Sewer Main Construction - Contractor shall record dimensions of each service line stub from nearest downstream manhole measured along the sanitary sewer main. The locations of manholes and service lines along with any other construction changes are to be incorporated on the original construction drawings and "Record Drawing" prints submitted to the City of Franklin DPW and the Franklin City Engineer as soon after completion of construction as possible.

REVISIONS:



DATE: 03/19/15
THIS DRAWING AND THE IDEAS, DESIGNS AND CONCEPTS CONTAINED HEREIN ARE THE EXCLUSIVE INTELLECTUAL PROPERTY OF THE SCHNEIDER CORPORATION AND ARE NOT TO BE USED OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE WRITTEN CONSENT OF THE SCHNEIDER CORPORATION.
COPYRIGHTED BY THE SCHNEIDER CORP. (2015)



HERITAGE, SECTION 6
CITY OF FRANKLIN, JOHNSON COUNTY
ARBOR INVESTMENTS, LLC
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015 PROJECT NO: 4569.600
DRAWN BY: BDP CHECKED BY: TCW
SHEET TITLE: SPECIFICATIONS
DRAWING FILES: T:\4\4569\600\dwg\C901-C902.dwg
XREF: T:\4\4569\600\dwg\Title600.dwg

SHEET NO.: C901

STORM SEWER SYSTEMS

1. SCOPE OF WORK

The work under this section includes all storm sewers, storm water inlets, and related items, including excavating and backfilling, necessary to complete the work shown on the drawings.

2. MATERIALS

A. Storm Sewers

1. Reinforced concrete sewer pipe shall conform to ASTM C-76 latest revision, with joints conforming to ASTM C-443 latest revision.
2. Corrugated High Density Polyethylene Type S (HDPE) pipe shall conform to AASHTO M 294, and shall have a minimum Cell Class of d 324420C in accordance with ASTM D 3350. The flexibility factor of HDPE pipe shall not exceed 0.095. Ribbed Polyethylene pipe shall conform to ASTM F 894, meeting the requirements for RSC 100 or RSC 160, and shall have a minimum Cell Class of 334433C in accordance with ASTM D 3350. Smoothwall Polyethylene pipe shall conform to ASTM F 714, and shall have a minimum Cell Class of 35434C in accordance with ASTM D 3350. All polyethylene pipe and fittings shall be made from high molecular weight high density polyethylene material meeting the applicable Cell Class requirements. All polyethylene material used in storm sewer pipe manufacture shall be virgin resin. Only sizes of 12" to 18" allowed. High Density Polyethylene pipe overlapping, gasketed pipe joints shall conform to ASTM D 3212. The gasket material shall conform to all requirements of ASTM F 477. As an alternative, pipe joints utilizing external coupling bands will be accepted, provided the minimum AASHTO requirements for satisfying soil tightness are also achieved.
3. Polyvinyl Chloride (PVC) profile wall gravity flow storm sewer pipe shall be the integral wall bell and spigot type with elastomeric seal joints and smooth inner walls in accordance with AASHTO M 304. A minimum Cell Class of 12454C or 12364C as set forth by ASTM D 1784 shall be required. Smoothwall PVC pipe shall be in accordance with ASTM F 679 or AASHTO M 278, and shall have a minimum Cell Class of 12364C for pipes meeting specification ASTM F 679, or 12454C for pipes meeting specification AASHTO M 278. Cell Class properties shall be as set forth by ASTM D 1784. Only sizes of 12" to 18" allowed. Flexible, gasketed joints shall be compression type so that when assembled, the gasket inside the bell is compressed radially on the pipe spigot to form a solight seal. The assembly of joints shall be in accordance with the pipe manufacturer's recommendations and ASTM D 3212. The gasket shall conform to the requirements of ASTM F 477. All field-cutting of pipe shall be completed in neat, trim manner using a hand or power saw.

B. Manholes

1. Precast reinforced concrete manhole sections and steps shall conform to ASTM C-478 latest revision.
2. Casting shall be of uniform quality, free from blow holes, porosity, hard spots, shrinkage distortion or other defects. They shall be smooth and well cleaned by shot-blasting or by some other approved method. They shall be coated with asphalt paint which shall result in a smooth coating, tough and tenacious when cold, not tacky or brittle. They shall be gray iron meeting ASTM A-48 latest revision.
3. Joints - Manhole sections shall be jointed with rubber type gaskets. The rubber type gaskets shall meet ASTM C-443 latest revision, when manhole and storm pipe are continuously in water.
4. Manhole steps shall be provided in all storm sewer structures 48-inches in diameter or larger. The maximum distance from grade to the first manhole step shall be 24"; the maximum distance between steps shall be 16", and the maximum distance from the last step to the structure benchwall shall be 24". Manhole steps shall be made from a steel reinforcing rod encapsulated in a copolymer polypropylene resin. The manhole steps shall equal or exceed OSHA requirements.

C. SUBDRAINS

1. Perforated plastic pipe subdrains shall conform to ASTM F-405, AASHTO M-252. (4" to 10" pipe)

3. APPLICATION

- A. Permits and Codes - The intent of this section of the specifications is that the contractor's bid on the work covered herein shall be based upon the drawings and specifications but that the work shall comply with all applicable codes and regulations as amended by any waivers. Contractor shall furnish all bonds necessary to get permits for cuts and connections to existing sewers.
- B. Local Standards - the term "Local Standards" as used herein means the standards of design and construction of the respective municipal department or utility company.

- C. Existing Improvements - Maintain in operating condition all active utilities, sewers and other drains encountered in the sewer installation. Repair to the satisfaction of the owner any damage to existing active improvements.
- D. Workmanship - To conform to all local, state and national codes and to be approved by all local and state agencies having jurisdiction.
- E. Trenching - Lay all pipe in open trenches, except when the local authority gives written permission for tunneling. Open the trench sufficiently ahead of pipe laying to reveal any obstructions. The width of the trench shall be the inside pipe diameter plus 24 inches for 12 inches above the pipe. Sheet and brace trench as necessary to protect workmen and adjacent structures. All trenching to comply with Occupational Safety and Health Administration Standards. Keep trenches free from water while construction is in progress. Under no circumstances lay pipe or appurtenances in standing water. Conduct the discharge from trench dewatering to drains or natural drainage channels.
- F. Special Supports - Whenever in the opinion of the Engineer the soil at or below the pipe grade is unsuitable for supporting sewers and appurtenances specified in this section, such special support, in addition to those shown or specified, shall be provided as the Engineer may direct, and the contract will be adjusted.
- G. Backfilling - for a depth of at least 12 inches above the top of the pipe, backfill with earth or granular material free from large stones, rock fragments, roots or sod. Tamp this backfill thoroughly, taking care not to disturb the pipe. For the remaining trench depth, backfill with earth or granular material containing stones or rocks not larger than 4 inches. Backfill under and within 5' of walks, parking areas, driveways and street shall be granular material only - thoroughly compacted by approved methods.
- H. Manhole Inverts - Construct manhole flow channels of concrete, smoothly finished and of semi-circular section conforming to the inside diameter of the connecting sewers. Make changes in size or grade gradually and changes in direction by true curves. Provide such channels for all connecting sewers at each manhole.
- I. Subdrains - All subdrains shall be of the size shown on the plans and shall be constructed to the grades shown. All drains constructed off-site as part of the outlet drain will be located as shown.
- J. Utilities - It shall be the responsibility of each contractor to verify all existing utilities and conditions pertaining to his phase of the work. It shall also be the contractor's responsibility to contact the owners of the various utilities before work is started. The contractor shall notify in writing the owners or the engineer of any changes, errors or omissions found on these plans or in the field before work is started or resumed.

STREETS

1. SCOPE OF WORK

The work required under this section includes all concrete and bituminous paving and related items necessary to complete the work indicated on drawings and described in the specifications, including but not limited to:

All streets, parking areas in contract limits  
Curbs and gutters  
Sidewalks and concrete slabs, exterior steps

2. MATERIALS

- A. Concrete - Concrete shall be ready-mixed concrete and shall be a mix of proportioned fine and coarse aggregates with Portland cement and water. Minimum cement content shall be 6 bags per cubic yard of concrete and maximum water content shall be 5.5 U.S. gallons per sack of cement, including moisture in the aggregate. Slump for normal weight concrete shall be a maximum of 4 inches and a minimum of 2 inches. The slump of machine placed concrete shall be no less than 1-1/4 inches nor more than 3 inches. Standard test ASTM C-143 shall be used to measure slump. Compressive strength of concrete at 28 days shall be 4000 psi. All exterior concrete shall have air entrainment of 5% to 8% by volume per ASTM C-260. Retempering of delivered concrete will not be allowed. Concrete shall be composed of:
  1. Portland cement - Conforming to ASTM C-150, Type IA or Type IIIA.
  2. Aggregates: Conforming to ASTM C-33.
  3. Water - Shall be clear and free from injurious amounts of oils, acids, alkalis, organic materials or other deleterious substances.
- B. Welded Steel Wire Fabric - Where required for concrete reinforcement shall conform to ASTM A185.
- C. Premoulded Joint Filler - Shall be of non-extruding type meeting ASTM D-544 except that premoulded joint filler used in concrete walk construction may be either non-extruding or resilient.
- D. Bituminous Pavement Materials - All materials proposed for the construction of bituminous pavements shall comply with the Indiana Department of Transportation specifications, per latest revision.
- E. Compacted Aggregate Subbase: Shall be crushed stone or gravel. Crushed gravel shall be a minimum of 35% crushed material. Chert shall be limited to a maximum of 8% of the total. Material shall be free from an excess of flat, elongated, thinly laminated, soft or disintegrated pieces; and shall be free from fragments coated with dirt. Compacted aggregate shall be graded as follows:

SIEVE SIZE	% PASSING
1-1/2"	100
1"	80-100
3/4"	70-90
1/2"	55-80
#4	35-60
#8	25-50
#30	12-30
#200	5-10

3. APPLICATION

- A. Grading - Do any necessary grading in addition to that performed in accordance with Earthwork Section, to bring subgrades, after final compaction, to the required grades and sections for site improvement.
- B. Preparation of Subgrade - Remove spongy and otherwise unsuitable material and replace with stable material. No traffic will be allowed on prepared subgrade prior to paving.
- C. Compaction of Subgrade - The first 6 inches below the subgrade shall be compacted to at least 100% of the maximum dry density as determined by the provisions of AASHTO T-99. Water shall be prevented from standing on the compacted subgrade.
- D. Utility Structures - Check for correct elevation of all manhole covers, valve boxes and similar structures located within areas to be paved, and make, or have made, any necessary adjustments in such structures.
- E. Placing Concrete
  1. Subgrade - Place concrete only on a moist, compacted subgrade or base free from loose material. Place no concrete on a muddy or frozen subgrade.
  2. Forms - All forms shall be free from warp, tight enough to prevent leakage and substantial enough to maintain their shape and position without springing or settling, when concrete is placed. Forms shall be clean and smooth immediately before concreting.
  3. Placing Concrete - Concrete shall be deposited so as to require as little rehandling as practicable. When concrete is to be placed at an atmospheric temperature of 35 degrees F. or less, paragraph 702.10 of the Indiana Department of Transportation Specifications latest revision shall be followed.

F. Concrete Curb

1. Expansion Joints - Shall be 1/2 inch thick premoulded at ends of all returns and at a maximum spacing of 100 feet.
2. Contraction Joints - Unless otherwise provided, contraction joints shall be sawed joints spaced 10 feet on center and 1 1/2" deep.
3. Finish - Tamp and screed concrete as soon as placed, and fill any honey combed places. Finish square corners to 1/4" radius and other corners to radii shown.

G. Concrete Walks and Exterior Steps

1. Slopes - Provide 1/4 inch per foot cross slope. Make adjustments in slopes at walk intersections as necessary to provide proper drainage.
2. Dimensions - Walks and steps shall be one course construction and of widths and details shown on the drawings.
3. Finish - Screed concrete and trowel with a steel trowel to a hard dense surface after surface water has disappeared. Apply medium broom finish and scribe control joints at 5 foot spacing. Provide 1/2" expansion joints where sidewalks intersect, and at a maximum spacing of 48 feet between expansion joints.

H. Curing Concrete - Except as otherwise specified, cure all concrete by one of the methods described in Section 501.17 of the Indiana Department of Transportation Specifications, latest revision.

I. Bituminous Pavement - Hot asphalt concrete pavement shall be as specified in Section 403 of the Indiana Department of Transportation Specifications latest revisions. Paving will not be permitted during unfavorable weather or when the temperature is 40 degrees F. and falling.

J. Compacted Aggregate Subbase - the thickness shown on the drawings is the minimum thickness of the fully compacted subbase. Compaction shall be accomplished by rolling with a smooth wheeled roller weighing 8 to 10 tons. Compact to 90% compaction using Standard Testing Procedures. Along curbs, headers and walls and at all placed not accessible to the roller, the aggregate material shall be tamped with mechanical tampers or with approved hand tampers.

REVISIONS:



DATE: 03/19/15  
THIS DRAWING AND THE IDEAS, DESIGNS AND CONCEPTS CONTAINED HEREIN ARE THE EXCLUSIVE INTELLECTUAL PROPERTY OF THE SCHNEIDER CORPORATION AND ARE NOT TO BE USED OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE WRITTEN CONSENT OF THE SCHNEIDER CORPORATION.  
© COPYRIGHTED BY THE SCHNEIDER CORP. (2015)



THE SCHNEIDER CORPORATION  
8001 Arrowridge Boulevard  
Charlotte, NC 28273  
Telephone: 704.697.5900  
Fax: 704.697.5990  
www.schneidercorp.com

Civil Engineering  
GIS \* LIS  
Land Surveying  
Landscape Architecture

HERITAGE, SECTION 6  
CITY OF FRANKLIN, JOHNSON COUNTY

ARBOR INVESTMENTS, LLC  
6626 E. 75TH STREET, SUITE 400, INDIANAPOLIS, IN 46250

DATE: 03/19/2015	PROJECT NO.:
DRAWN BY: BDP	4569.600
CHECKED BY: TCW	
SHEET TITLE: SPECIFICATIONS	
DRAWING FILES: T:\4\4569\600\dwg\C901-C902.dwg XREF: T:\4\4569\600\dwg\Title600.dwg	

SHEET NO.:

C902